



(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 72

(51) International Patent Classification (IPC):
B01D 39/16 ^(2006.01) **B01D 39/14** ^(2006.01)
B01D 46/52 ^(2006.01) **B01D 63/14** ^(2006.01)
B01D 65/06 ^(2006.01) **B01D 71/32** ^(2006.01)
B01D 71/36 ^(2006.01)

(48) Corrigendum issued on:
29.05.2024 Bulletin 2024/22

(52) Cooperative Patent Classification (CPC):
B01D 63/14; A62B 23/02; B01D 39/1623;
B01D 39/1692; B01D 46/52; B01D 46/80;
B01D 46/84; B01D 65/02; B01D 65/022;
B01D 65/06; B01D 69/02; B01D 69/10;
B01D 69/12; B01D 71/26; B01D 71/32; (Cont.)

(43) Date of publication:
17.04.2024 Bulletin 2024/16

(21) Application number: **22816198.0**

(86) International application number:
PCT/JP2022/022497

(22) Date of filing: **02.06.2022**

(87) International publication number:
WO 2022/255453 (08.12.2022 Gazette 2022/49)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **KIYOTANI, Hideyuki**
Osaka-shi, Osaka 530-0001 (JP)
• **INUI, Kunihiko**
Osaka-shi, Osaka 530-0001 (JP)

(30) Priority: **04.06.2021 JP 2021094637**

(74) Representative: **Hoffmann Eitle**
Patent- und Rechtsanwälte PartmbB
Arabellastraße 30
81925 München (DE)

(71) Applicant: **DAIKIN INDUSTRIES, LTD.**
Osaka-Shi, Osaka 530-0001 (JP)

(54) **AIR FILTER MEDIUM, PLEATED FILTER MEDIUM, AIR FILTER UNIT, MASK FILTERING MEDIUM, AND METHOD OF RECYCLING AIR FILTER MEDIUM**

(57) Provided are an air filter medium that can be reused with a small decrease in performance by performing a disinfection treatment, a pleated pack, an air filter unit, a mask filter medium, and a method for regenerating an air filter medium. An air filter medium (30) including a fluororesin porous membrane (31) and a supporting member (32) stacked on top of each other has a permeability ratio (permeability after disinfection treatment/permeability before disinfection treatment) of 5.0 or less, the permeability ratio being a ratio of permeabilities of the air filter media (30) before and after the disinfection treatment of the fluororesin porous membrane (31) as determined using NaCl particles having a particle size of 0.1 μm , and a pressure loss ratio (pressure loss after disinfection treatment/pressure loss before disinfection treatment) of 0.83 or more and 1.15 or less, the pressure loss

ratio being a ratio of pressure losses of the air filter media (30) before and after the disinfection treatment of the fluororesin porous membrane (31).

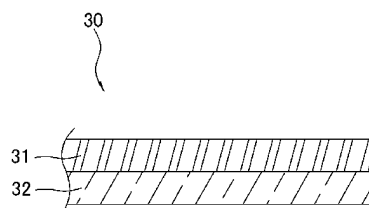


FIG. 1

(52) Cooperative Patent Classification (CPC): (Cont.)

B01D 71/36; B01D 71/48; B32B 3/266;
B32B 5/022; B32B 5/08; B32B 27/12;
B32B 27/322; A62B 18/02; B01D 2239/0233;
B01D 2239/0442; B01D 2239/0627;
B01D 2239/0654; B01D 2239/0668;
B01D 2239/0681; B01D 2239/12;
B01D 2239/1233; B01D 2239/1291;
B01D 2311/2696; B01D 2321/168;
B01D 2325/0281; B01D 2325/20; B32B 2250/40;
B32B 2262/0253; B32B 2262/0276;
B32B 2262/14