



(12)

EUROPEAN PATENT APPLICATION

- (43)

Date of publication:
24.07.2024 Bulletin 2024/30
- (51)

International Patent Classification (IPC):
A47L 15/00^(2006.01) A47L 15/42^(2006.01)
- (21)

Application number: 23152112.1
- (52)

Cooperative Patent Classification (CPC):
A47L 15/0026; A47L 15/0057; A47L 15/4219;
A47L 2501/03; A47L 2501/04; A47L 2501/05
- (22)

Date of filing: 18.01.2023

- (84)

Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC ME MK MT NL
NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA
Designated Validation States:
KH MA MD TN
- (71)

Applicant: Bonferraro S.p.A.
37060 Bonferraro (VR) (IT)
- (72)

Inventors:
• AMBROSI, Andrea
37052 Casaleone VR (IT)
- PINAROLI, Eros
37060 Castel d’Azzano VR (IT)

• REBECCHI, Fulvio
46100 Mantova MN (IT)

• ZIVIANI, Diego
46037 Roncoferraro MN (IT)

• TOSI, Mauro
37051 Bovolone VR (IT)

• ROSSATO, Andrea Carlo
37054 Nogara VR (IT)
- (74)

Representative: Concone, Emanuele et al
Società Italiana Brevetti S.p.A.
Via Carducci 8
20123 Milano (IT)

(54)

OPERATING CYCLE FOR A DISHWASHER

- (57)

Operating cycle for a dishwasher comprising a diverter valve that controls the flow of water to a plurality of sprayers through a corresponding plurality of outlets, and a support (15) mounted on the outlet of the diverter valve towards a lower sprayer (10), said support (15) having an opening (15a) in its lower region. In the inter-
- mediate rinse phase, the combination of the amount of loaded water with the rotational speed of the wash pump (7) generates a water pressure P equal to at least a value P1 that allows water to escape from the support (15) through the opening (15a), but less than a value P2 that causes water to be delivered from the lower sprayer (10).

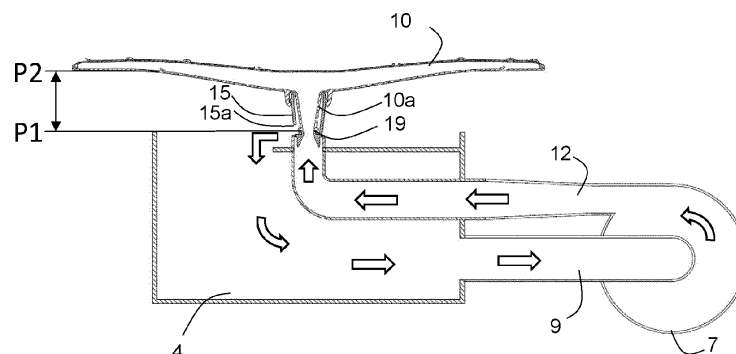


FIG.6

Description

[0001] The present invention relates to dishwashers, both for domestic and professional use, and in particular to a dishwasher operating cycle for performing an intermediate cleaning of the hydraulic circuit.

[0002] It is well known that the increasingly stringent regulations concerning the energy classes of household appliances, and in particular of dishwashers, push manufacturers to reduce the operating temperatures and the volumes of water used, so that the same quantity of dishes to be treated with less wash water leads the latter to a higher concentration of dirt and detergent. As the hydraulic circuit inevitably has areas where stagnation occurs at the end of the wash water drainage phase, these stagnation areas become more polluted and it is therefore even more important to eliminate them in order to have water that is as clean as possible in the subsequent rinse phases.

[0003] To this purpose, after the wash phase and before the final rinse with hot water, an intermediate rinse is traditionally carried out with cold water, to reduce energy consumption, in order to remove the residues of polluted water that remain after the drainage of the wash water. In this way, the hydraulic circuit is cleaned in preparation for the final rinse, which must be carried out with water that is as clean as possible, but at the same time there is the disadvantage that the hydraulic circuit, the wash tank and the dishes are also cooled.

[0004] As a result, compared to a cycle without an intermediate rinse, the dishwasher is forced to heat the final rinse water more, resulting in a higher energy consumption. Obviously, it would be possible to avoid this by also using hot water for the intermediate rinse, but the overall energy consumption would not change because the heating for the intermediate rinse would compensate for the reduction in heating for the final rinse. Similarly, it would be possible to dispense with the intermediate rinse, but in that case the water for the final rinse would be polluted with not fully satisfactory washing results.

[0005] To overcome these drawbacks, it is known from EP 2759244B1 to introduce mains water into the dishwasher through the wash pump while it is turned off, so that the water fed into the wash pump flows through it and from there goes directly to the bottom sump of the wash tank through the relevant connecting pipes, from where it is discharged by activating the drain pump. In this way, an almost complete disposal of the residual wash liquid can be achieved without affecting the wash tank and dishes by moving the water inlet from the sump to the wash pump.

[0006] However, it has been found that due to the pressure of the wash pump during normal operation, the wash liquid can flow back into the mains water line with the risk of undesirable contamination.

[0007] To solve this problem, DE 102017129052A1 describes a dishwasher equipped with a mains water supply line controlled by a two-way valve with a first outlet

leading to the bottom sump of the wash tank, as in conventional dishwashers, and a second outlet leading to the delivery duct of the wash pump. In the intermediate rinse phase, water can be loaded by switching the valve to the second outlet while the wash pump is off and the drain pump is running. In this way, the advantage of EP 2759244B1 of washing only the most critical areas of the hydraulic circuit, without affecting the wash tank and dishes, is maintained, but during normal operation of the wash pump there is no risk of contamination in the mains water line. In fact, in that phase the two-way valve is switched to the first outlet and thus prevents the backflow of washing liquid from the delivery duct of the wash pump.

[0008] This second solution is also not without drawbacks, as it requires an expensive and bulky two-way valve and a more complex hydraulic circuit. In addition, both of the above-mentioned prior art solutions involve a non-negligible consumption of water, since the water is immediately discharged by the drain pump as soon as it enters the sump after flowing back through the delivery duct and the wash pump.

[0009] The object of the present invention is therefore to provide a dishwasher which overcomes said drawbacks. This object is achieved by means of a dishwasher provided with an operating cycle that allows to perform the intermediate rinse simply by reducing the rotational speed of the wash pump and/or the amount of water to be used in said phase, so that the water arrives to the lower sprayer support and, through the opening in said support that is already present to vent air, can leak down into the sump without being delivered through the lower sprayer. Other advantageous features of the present dishwasher are specified in the dependent claims.

[0010] The main advantage of the dishwasher according to the present invention is that it is possible to carry out the intermediate rinse by limiting it to the most critical areas of the hydraulic circuit, without affecting the wash tank and the dishes, and without having to make any modification/integration to the hydraulic circuit. This result in a reduction of the dishwasher cost both in terms of components and labor for its assembly, since the hydraulic circuit is simpler and less bulky with respect to the above-cited prior art dishwashers.

[0011] A further advantage of this dishwasher and its operating cycle derives from the fact that the intermediate rinse phase requires less water consumption, both due to the smaller amount of water that is loaded and because the drain pump is activated only at the end of this phase, so that the water loaded for this phase can be circulated several times for a better cleaning of the affected portion of the hydraulic circuit.

[0012] These and other advantages and features of the dishwasher and its operating cycle according to the present invention will be apparent to those skilled in the art from the following detailed description of an embodiment thereof, with reference to the accompanying drawings in which:

Fig.1 is a schematic view illustrating the connections between the main elements of the dishwasher;
 Fig.2 is a top plan view of the bottom elements of the hydraulic circuit of the dishwasher;
 Fig.3 is a rear top perspective view similar to Fig.2;
 Fig.4 is a partial sectional view along line A-A of Fig.2;
 Fig.5 is a view similar to Fig.4 with the addition of the stem of the lower sprayer; and
 Fig.6 is a schematic vertical sectional view showing the circulation of water during the intermediate rinse.

[0013] Referring to Figs. 1-2, it can be seen that a dishwasher according to the present invention traditionally comprises a load duct, controlled by a shut-off solenoid valve 1, for loading mains water from a tap to an air break 2, then passing through a softener 3 containing descaling resins, to be finally loaded into a sump 4 at the bottom of the wash tank through a first inlet 5. The water is then withdrawn for the wash/rinse phases, through an outlet 6, by a wash pump 7, preceded by a resistor 8 arranged on the suction duct 9. The wash pump 7 sends the water to the sprayers 10, 11 through a delivery duct 12, a second inlet 20 and a diverter valve, which controls the inflow to the various sprayers via its three outlets 16, 17, 18 (there is also a third sprayer, not shown, on the ceiling of the wash tank). The machine further comprises a drain pump 13, for sending water from sump 4 to a drain duct 14.

[0014] As shown in Figs. 3-6, the lower sprayer 10 is engaged through its stem 10a on a support 15 mounted on the first outlet 16 of the diverter valve, while the upper sprayer 11 and the sprayer on the ceiling of the wash chamber are fed through ducts extending from the second outlet 17 and the third outlet 18 of the diverter valve, respectively. Support 15 has an opening 15a in its lower region, flush with the abutment resting on top of the first outlet 16, this opening 15a being usually used for venting air from the hydraulic circuit. When the lower sprayer 10 is engaged, via its stem 10a, on the support 15, a small gap 19 remains between these two elements at the opening 15a, allowing air to be vented through the opening 15a.

[0015] It should be noted that during normal wash and rinse phases, the static water pressure at gap 19 is very low, due to the Venturi effect generated by the convergent shape of the lower part 15b of support 15 followed by the divergent shape of stem 10a; therefore, the water leakage through gap 19 and opening 15a is negligible.

[0016] The novel aspect of this dishwasher is that it is possible to reduce the dynamic water pressure at gap 19, so as to increase the static pressure and make virtually all the water leak into sump 4 through gap 19 and opening 15a.

[0017] In the light of the above description and with the help of Fig.6, the simple and effective operation of the dishwasher according to the present invention is readily understandable.

[0018] As mentioned above, in the intermediate rinsing phase, it is essential that the pressure P of the water circulated by the wash pump 7 has a value at least equal to a minimum value P1 such that the water can escape from the spray support 15 through the opening 15a, otherwise the water would not be recirculated, but less than a maximum value P2 that causes water to flow out of the lower sprayer 10, otherwise water would be sprayed on the bottom of the wash tank or even on the dishes resulting in a reduction of their temperature and energy expenditure in bringing them back to temperature for the final rinse.

[0019] In the intermediate rinse phase, only outlet 16 of the diverter valve is open, while all other outlets 17, 18 are closed. The amount of water loaded into sump 4 through inlet 5 is between 25% and 60% of the volume V of the part of the hydraulic circuit to be cleaned, that is, the part between outlet 6 of sump 4 and outlet 16 of the diverter valve.

[0020] The wash pump 7 circulates water only in the lower part of the dishwasher hydraulic circuit, drawing it in from sump 4 through the suction duct 9 and resistor 8, and then sending it back to sump 4 along the delivery duct 12 and through the second inlet 20. When the circuit cleaning is finished, the water is discharged by the drain pump 13 through the drain duct 14, leaving the wash/rinse circuit clean and ready for the final rinse.

[0021] Note that the duration of the intermediate rinse phase and the amount of water loaded for this phase (indicatively 200-300 ml) can be freely chosen depending on the specific circuit cleaning requirements. In addition, this phase could be divided into multiple sub-phases, that is, it could include multiple sequences of water loading, circuit cleaning, and water draining.

[0022] The amount of water is comprised within the above range of 25-60% of volume V when the wash pump 7 operates at a rotational speed similar to that used in the other phases of the operating cycle, indicatively with a reduction of up to 20%. In the case where the pump operates at even lower speeds, this allows for an increase in the upper limit of the range of the amount of water that is offset by the reduced pump speed (while the lower limit remains unchanged). For example, if the speed reduction of pump 7 is 40% the upper limit of the loaded water can be 80% of V, if the speed reduction reaches 60% the upper limit can be up to 120% of V (with other intermediate values basically proportional).

[0023] In this way, the energy consumption of pump 7 is reduced and there is more water available for cleaning, which can then be more thorough and faster, at the expense of higher water consumption.

[0024] Thus, the relevant operating cycle of a dishwasher according to the present invention can be summarized in the following steps:

- (a) initial loading of water into sump 4;
- (b) performing of the wash phase;
- (c) discharge of the wash water;

- (d) closing of all outlets of the diverter valve except outlet 16 towards the lower sprayer 10;
- (e) loading water for the intermediate rinse into sump 4;
- (f) activation of the wash pump 7;
- (g) deactivation of the wash pump 7;
- (h) discharge of the intermediate rinse water;
- (i) opening of all outlets of the diverter valve;
- (j) loading the final rinse water into sump 4;
- (k) performing of the final rinse phase;
- (l) discharge of the final rinse water;

in which the combination of the amount of water loaded in step (e) with the rotational speed of the wash pump 7 in step (f) generates a water pressure P equal to at least a value P1 that allows water to escape from the sprayer support 15 through the opening 15a, but less than a value P2 that causes water to be delivered from the lower sprayer 10, i.e., $P1 \leq P < P2$.

[0025] Note that, as mentioned earlier, the sequence of steps e)-h) could also be performed several times, and steps c)-d) could be swapped, as could steps i)-j).

[0026] From the above, it is easy to understand how the dishwasher according to the present invention can perform the final rinse with less energy consumption, since the wash tank and the dishes have not been cooled by the cold water loaded in the previous phase. Moreover, the quantity of water required for washing the wash/rinse circuit, which is in any case the part of the hydraulic circuit with the greatest stagnation of polluted water, is significantly less than that required for a traditional intermediate rinse. All of this without having to intervene on the dishwasher structure, but only on the mode of carrying out the intermediate rinse.

[0027] Note that softener 3 and/or air break 2 could be absent, and that in the case of an industrial dishwasher, pump 7 and sprayers 10, 11 would only be intended for washing and there would be a further pump and two further sprayers specifically intended for rinsing, but the part of the circuit illustrated in the figures would not change.

[0028] It is clear that the embodiment of the dishwasher according to the above-described and illustrated invention is only an example susceptible to numerous variations. In particular, the diverter valve could have a different number of outlets depending on the number of sprayers, and the exact shape and arrangement of ducts 9, 12, 14 and of inlets 5 and 20, as well as of the possible softener 3 and/or air break 2, may be freely varied according to specific constructional requirements, as long as their relative arrangement within the hydraulic circuit illustrated above is maintained.

Claims

1. Operating cycle for a dishwasher comprising:

- a load valve (1) controlling the inflow of water

from the mains through a load duct to load water into a bottom sump (4) through an inlet (5);

- a wash pump (7) that draws water from said bottom sump (4) through a suction duct (9) and sends it to a plurality of sprayers (10, 11) through a delivery duct (12) and a diverter valve that controls the flow of water to said sprayers (10, 11) through a corresponding plurality of outlets (16, 17, 18);
- a drain pump (13) connected to a drain duct (14) so as to discharge water from the bottom sump (4);
- a support (15) mounted on the outlet (16) of the diverter valve towards a lower sprayer (10), said support (15) having an opening (15a) in its lower region and said lower sprayer (10) being engaged through a stem (10a) thereof onto the support (15) such that a small gap (19) remains between these two elements at said opening (15a);

said operating cycle comprising the following steps:

- (a) initial loading of water into the bottom sump (4);
- (b) performing of the wash phase;
- (c) discharge of the wash water;
- (d) closing of all outlets of the diverter valve except the outlet (16) towards the lower sprayer (10);
- (e) loading water for the intermediate rinse into the bottom sump (4);
- (f) activation of the wash pump (7);
- (g) deactivation of the wash pump (7);
- (h) discharge of the intermediate rinse water;
- (i) opening of all outlets of the diverter valve;
- (j) loading the final rinse water into the bottom sump (4);
- (k) performing of the final rinse phase;
- (l) discharge of the final rinse water;

characterized in that the combination of the amount of water loaded in step (e) with the rotational speed of the wash pump (7) in step (f) generates a water pressure P equal to at least a value P1 that allows water to escape from the support (15) through the opening (15a), but less than a value P2 that causes water to be delivered from the lower sprayer (10); and **in that** steps (c)-(d) could be swapped, as could steps (i)-(j).

2. Operating cycle according to claim 1, **characterized in that** the sequence of steps (e)-(h) is performed several times

3. Operating cycle according to claim 1 or 2, **characterized in that** in step (e) there is loaded an amount of water comprised between 25% and 60% of the

volume of the portion of the hydraulic circuit comprised between the outlet (6) of the sump (4) to which the suction duct (9) is connected and the outlet (16) of the diverter valve towards the lower sprayer (10).

5

4. Operating cycle according to claim 1 or 2, **characterized in that** in step (e) there is loaded an amount of water comprised between 25% and 80% of the volume of the portion of the hydraulic circuit comprised between the outlet (6) of the sump (4) to which the suction duct (9) is connected and the outlet (16) of the diverter valve towards the lower sprayer (10), and in step (f) the wash pump (7) operates at a rotational speed reduced by about 40% with respect to the rotational speed used in the other steps of the operating cycle.
5. Operating cycle according to claim 1 or 2, **characterized in that** in step (e) there is loaded an amount of water comprised between 25% and 120% of the volume of the portion of the hydraulic circuit comprised between the outlet (6) of the sump (4) to which the suction duct (9) is connected and the outlet (16) of the diverter valve towards the lower sprayer (10), and in step (f) the wash pump (7) operates at a rotational speed reduced by about 60% with respect to the rotational speed used in the other steps of the operating cycle.

10

15

20

25

30

35

40

45

50

55

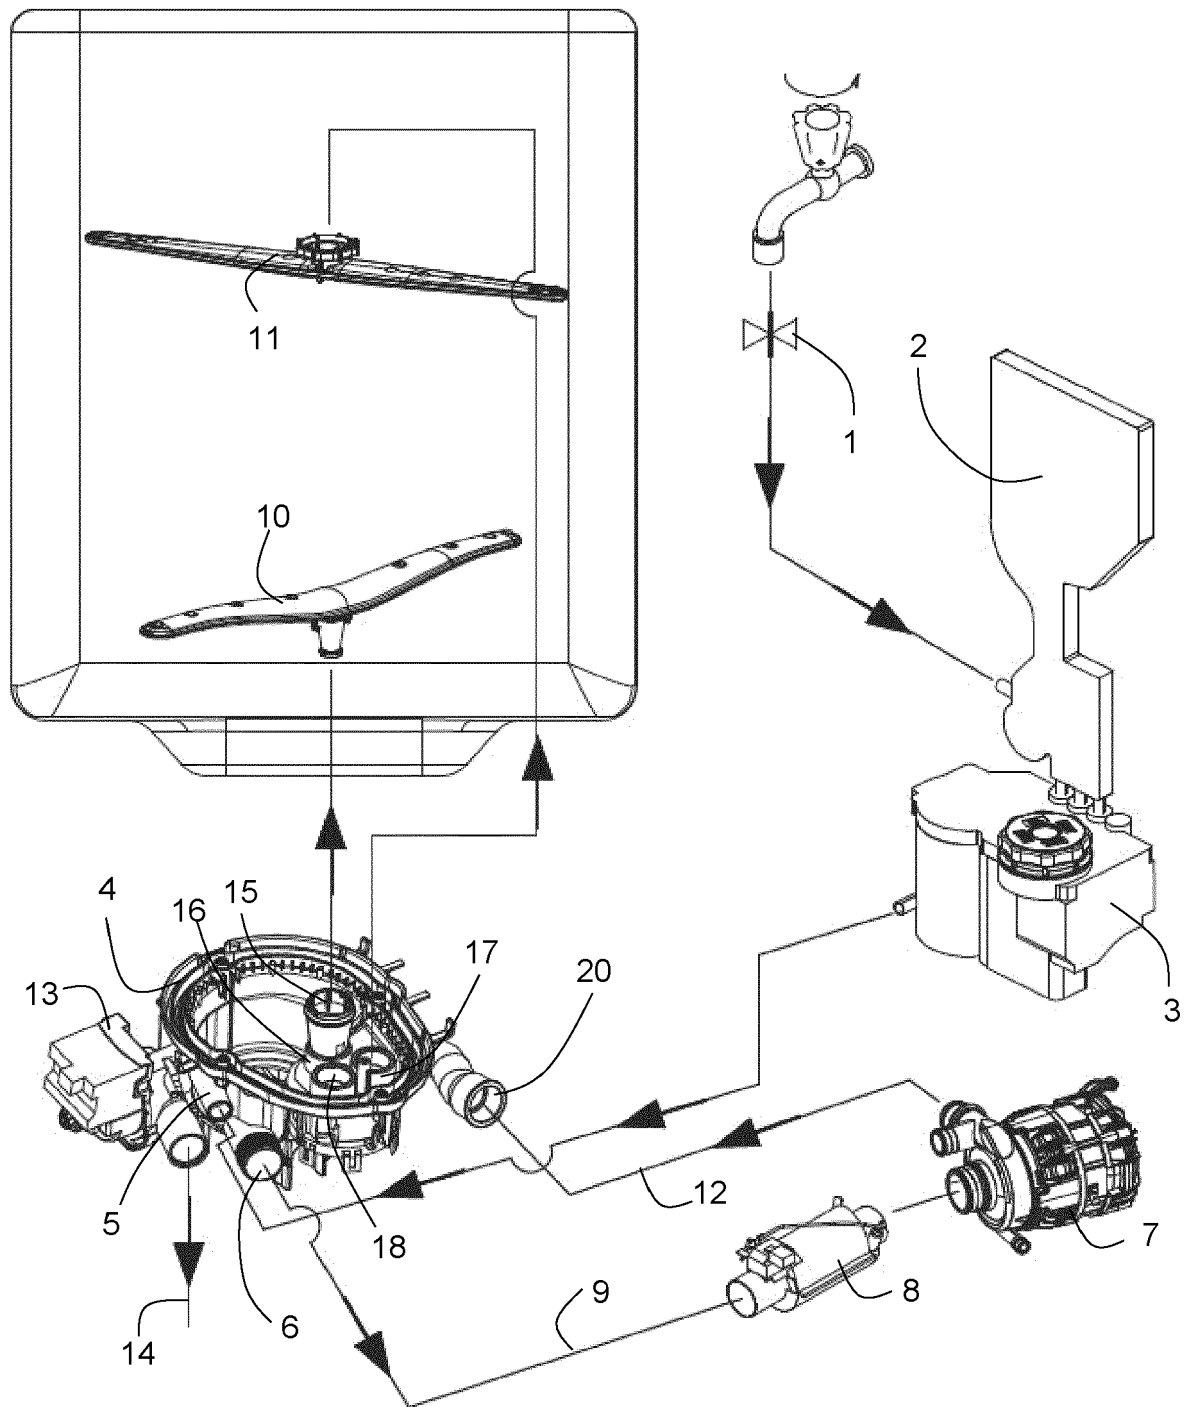


FIG.1

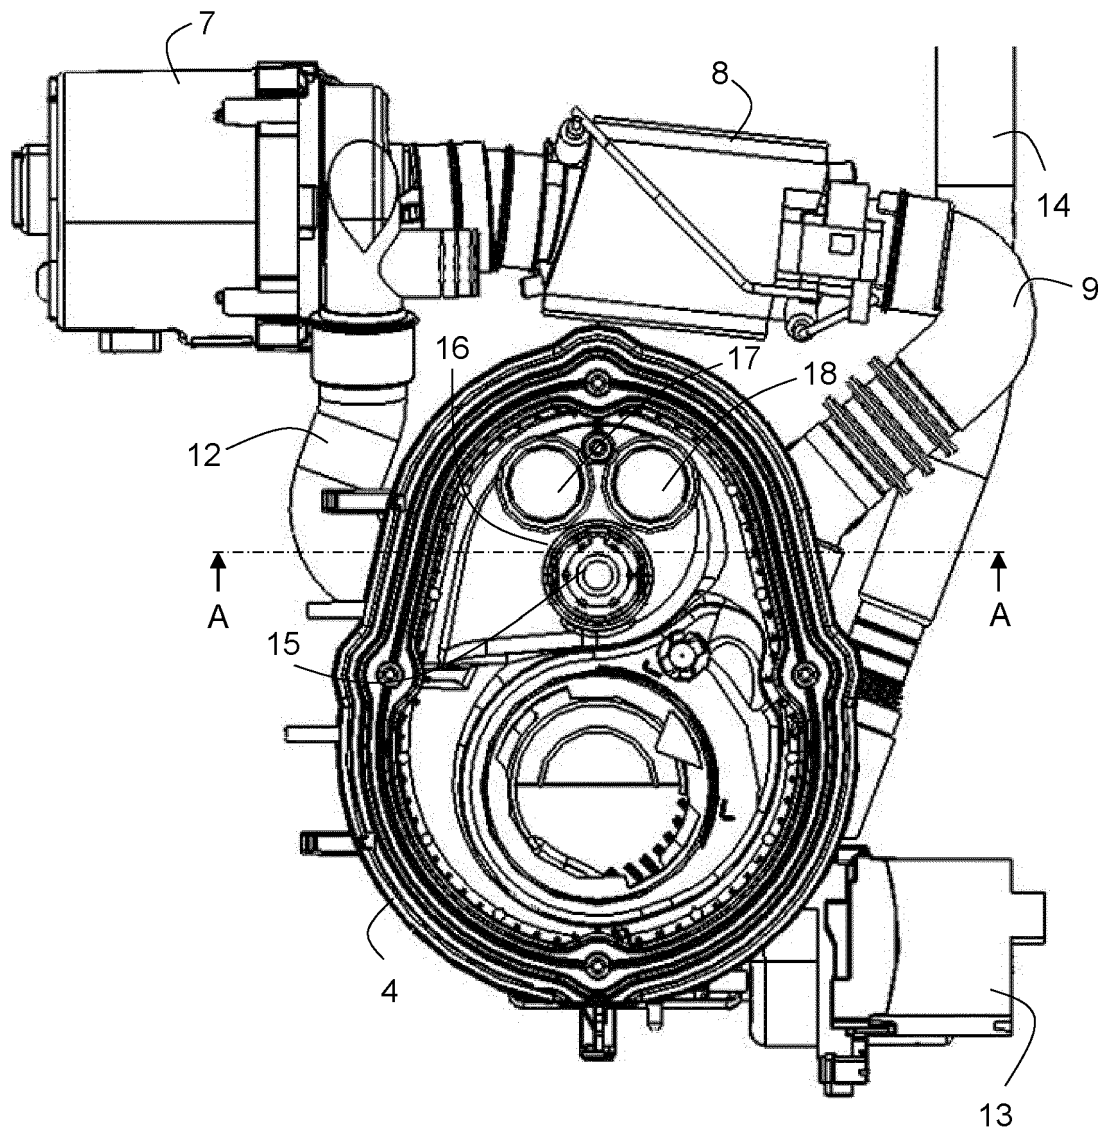


FIG.2

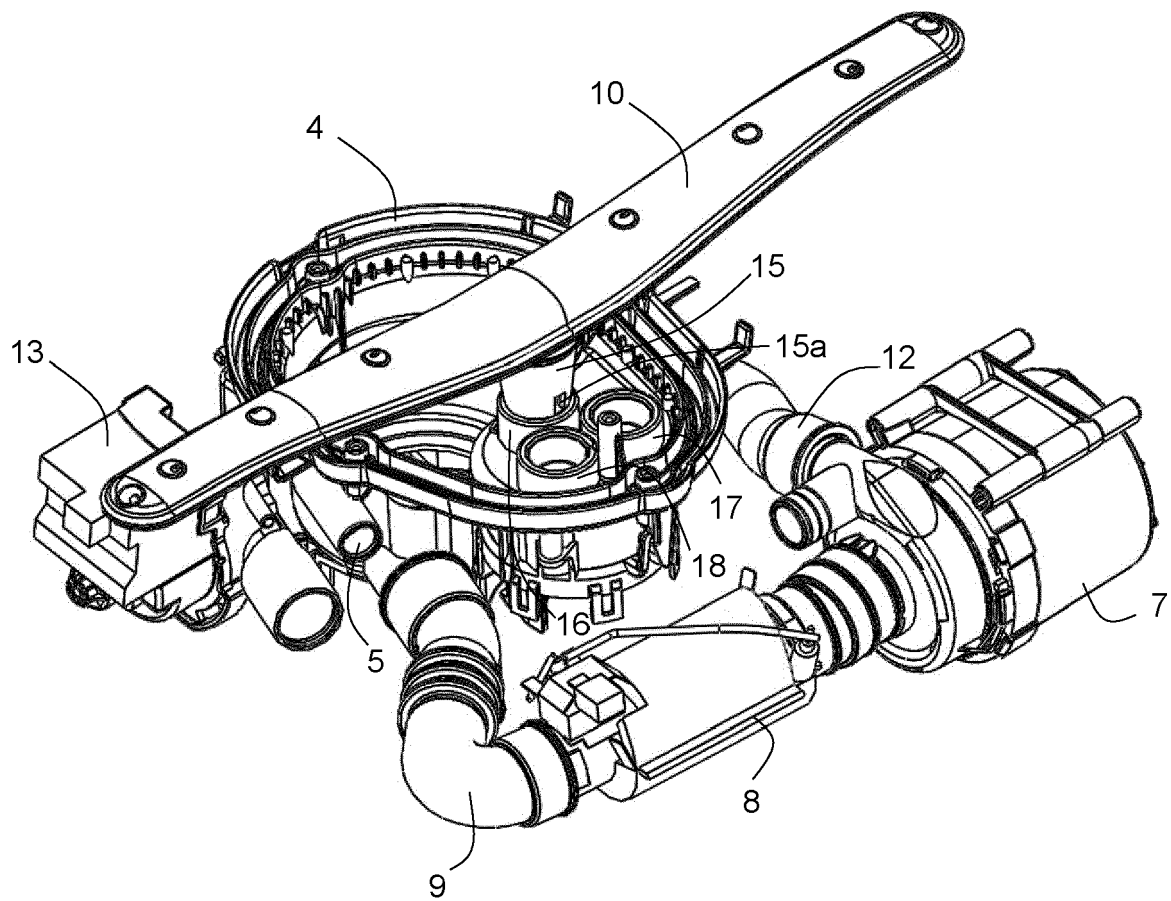


FIG.3

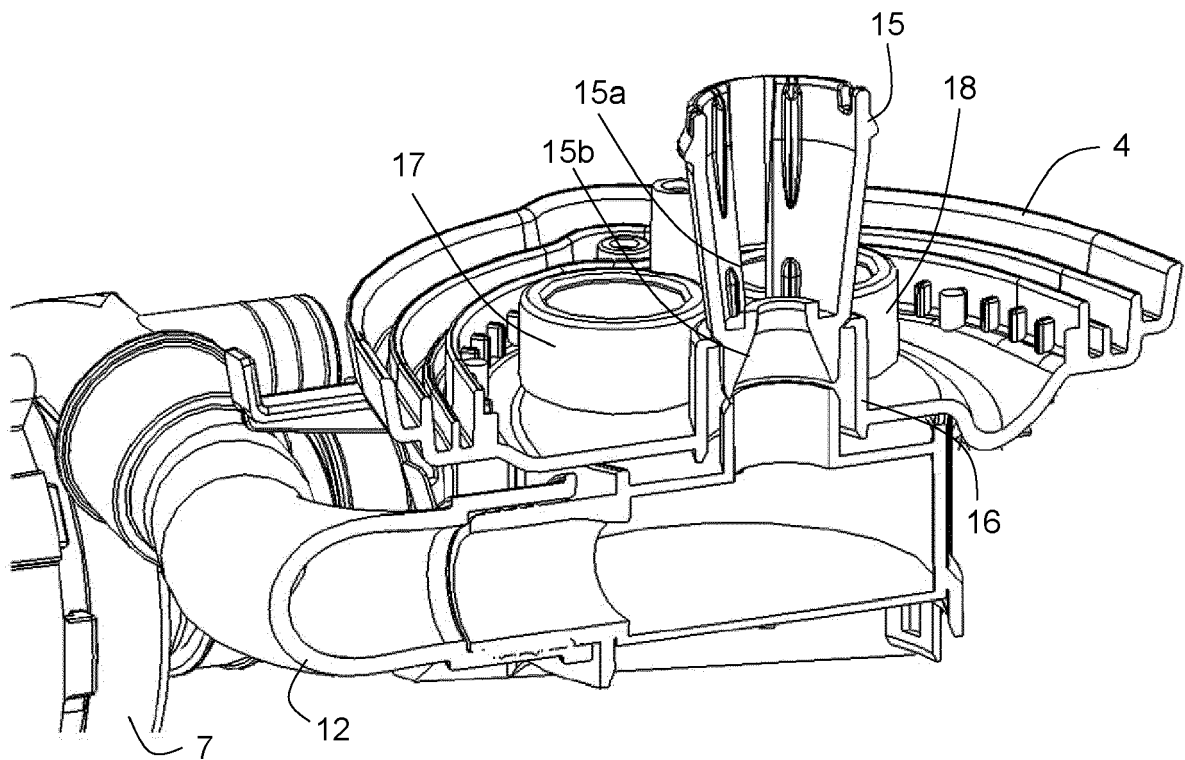


FIG.4

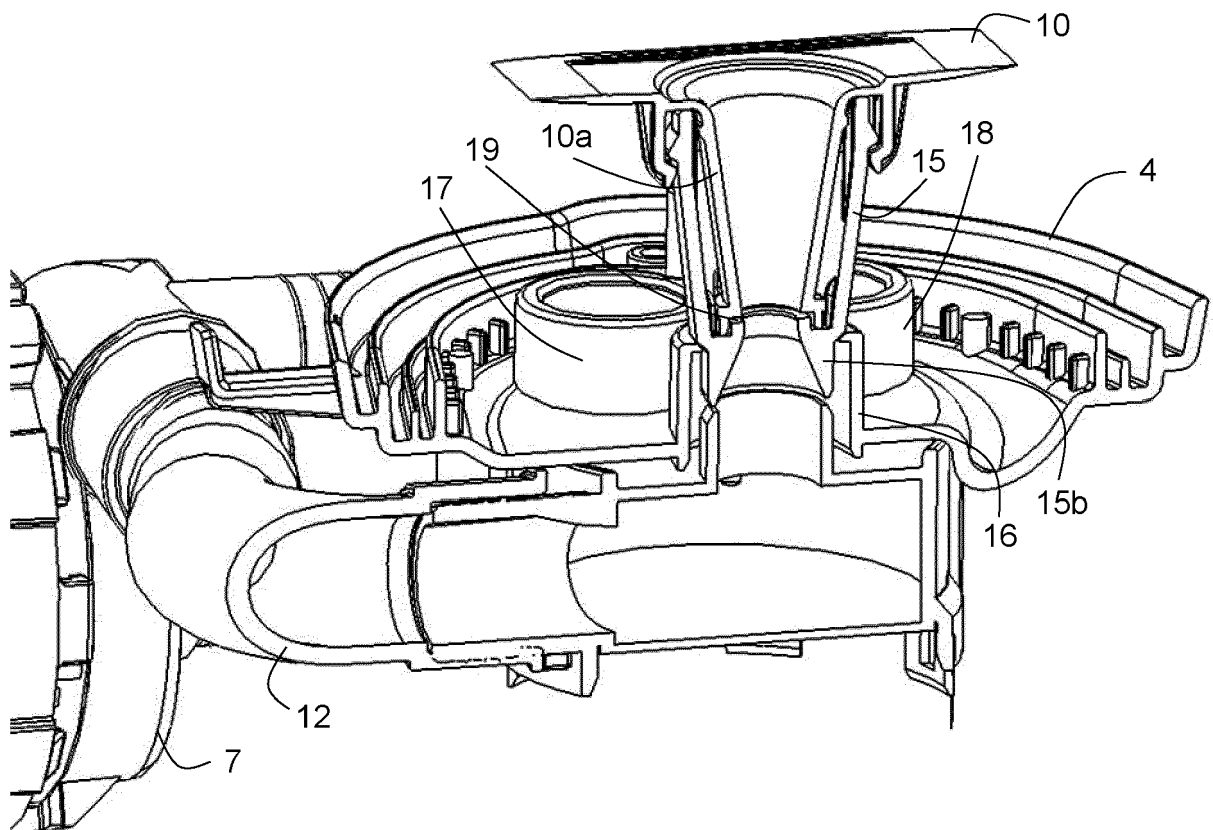


FIG.5

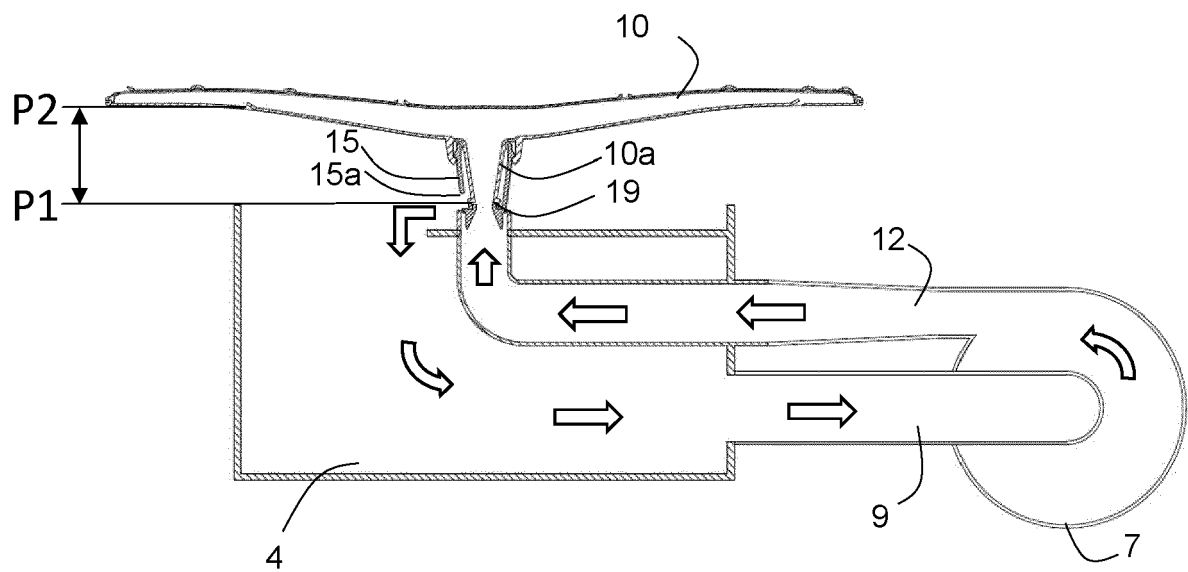


FIG.6



EUROPEAN SEARCH REPORT

Application Number

EP 23 15 2112

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	EP 2 926 709 A1 (LG ELECTRONICS INC [KR]) 7 October 2015 (2015-10-07) * paragraph [0025] - paragraph [0139]; figures 1-5 *	1-5	INV. A47L15/00 A47L15/42
A	EP 2 522 267 A1 (FAGORBRANDT SAS [FR]) 14 November 2012 (2012-11-14) * paragraph [0016] - paragraph [0091]; figures 1-2 *	1-5	
A,D	DE 10 2017 129052 A1 (MIELE & CIE [DE]) 6 June 2019 (2019-06-06) * the whole document *	1-5	
A,D	EP 2 759 244 B1 (MIELE & CIE [DE]) 16 December 2015 (2015-12-16) * the whole document *	1-5	
			TECHNICAL FIELDS SEARCHED (IPC)
			A47L
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 30 June 2023	Examiner Lodato, Alessandra
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 23 15 2112

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-06-2023

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2926709 A1	07-10-2015	CN 104921682 A	23-09-2015
		EP 2926709 A1	07-10-2015
		KR 20150109943 A	02-10-2015
		US 2015265130 A1	24-09-2015

EP 2522267 A1	14-11-2012	EP 2522267 A1	14-11-2012
		ES 2551753 T3	23-11-2015
		FR 2974996 A1	16-11-2012

DE 102017129052 A1	06-06-2019	NONE	

EP 2759244 B1	16-12-2015	DE 102013100859 A1	31-07-2014
		EP 2759244 A1	30-07-2014
		PL 2759244 T3	29-04-2016

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2759244 B1 [0005] [0007]
- DE 102017129052 A1 [0007]