



(11) **EP 4 415 503 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**  
published in accordance with Art. 153(4) EPC

(15) Correction information:  
**Corrected version no 1 (W1 A1)**  
**Corrections, see**  
**Bibliography INID code(s) 72**

(51) International Patent Classification (IPC):  
**H10K 59/12 (2023.01)**

(52) Cooperative Patent Classification (CPC):  
**H10K 59/12; H10K 59/131**

(48) Corrigendum issued on:  
**02.10.2024 Bulletin 2024/40**

(86) International application number:  
**PCT/CN2022/113940**

(43) Date of publication:  
**14.08.2024 Bulletin 2024/33**

(87) International publication number:  
**WO 2024/040389 (29.02.2024 Gazette 2024/09)**

(21) Application number: **22955939.8**

(22) Date of filing: **22.08.2022**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**KH MA MD TN**

• **Chengdu BOE Optoelectronics Technology Co., Ltd.**  
**Chengdu, Sichuan 611731 (CN)**

(72) Inventors:  
• **CUI, Hongda**  
**Beijing 100176 (CN)**  
• **WANG, Qiwei**  
**Beijing 100176 (CN)**

(71) Applicants:  
• **BOE Technology Group Co., Ltd.**  
**Chaoyang District,**  
**Beijing 100015 (CN)**

(74) Representative: **Durán-Corretjer, S.L.P.**  
**Còrsega, 329**  
**(Paseo de Gracia/Diagonal)**  
**08037 Barcelona (ES)**

(54) **DISPLAY PANEL AND DISPLAY APPARATUS**

(57) A display panel (1) and a display apparatus. The display panel (1) comprises: A display region (100), the display region (100) comprising: a light-transmitting display area (10) and a conventional display area located at at-least one side of the light-transmitting display area (10), the conventional display area comprising a first region (100A), a second region (100B) and a third region (100C); at least one circuit unit of the first region (100A) of the conventional display area being connected to a light-emitting device (L) in the light-transmitting display area (10); at least one circuit unit of the third region (100C) of the conventional display area comprising a data connection line (70); a second high-voltage power supply line comprising: a first high-voltage power supply sub-line (VLB1) and a second high-voltage power supply sub-line (VLB2) connected to one another; the second high-voltage power supply sub-line (VLB2) being located on the side of the first high-voltage power supply sub-line (VLB1) away from a substrate (101); a first high-voltage power supply line (VLA) being disposed in the same layer

as the second high-voltage power supply sub-line (VLB2), and a third high-voltage power supply line (VLC) being disposed in the same layer as the first high-voltage power supply sub-line (VLB1).

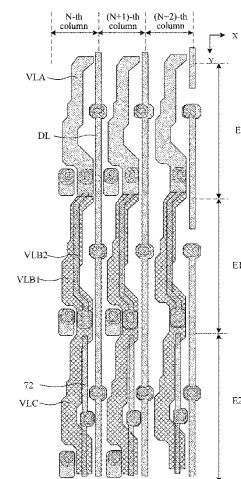


FIG. 7A

**EP 4 415 503 A8**