



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A2)
Corrections, see
Bibliography
Remarks

(48) Corrigendum issued on:
09.10.2024 Bulletin 2024/41

(43) Date of publication:
28.08.2024 Bulletin 2024/35

(21) Application number: **24169821.6**

(22) Date of filing: **11.05.2018**

(51) International Patent Classification (IPC):
H04W 52/50 (2009.01)

(52) Cooperative Patent Classification (CPC):
H04W 52/367; H04B 7/005; H04L 5/00;
H04W 52/14; H04W 52/18; H04W 52/24;
H04W 52/38; H04W 52/50; H04W 72/04;
H04W 52/146; H04W 74/08

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **17.05.2017 CN 201710349785**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
18802242.0 / 3 461 052

(71) Applicant: **Huawei Technologies Co., Ltd.**
Shenzhen, Guangdong 518129 (CN)

(72) Inventors:
• **Ji, Tong**
Shenzhen, 518129 (CN)

• **Jin, Zhe**
Shenzhen, 518129 (CN)
• **Zhang, Weiliang**
Shenzhen, 518129 (CN)

(74) Representative: **Epping - Hermann - Fischer**
Patentanwalts-gesellschaft mbH
Schloßschmidstraße 5
80639 München (DE)

Remarks:

- This application was filed on 12-04-2024 as a divisional application to the application mentioned under INID code 62.
- Claims filed after the date of receipt of the divisional application (Rule 68(4) EPC).

(54) **INDICATION INFORMATION SENDING METHOD, INDICATION INFORMATION RECEIVING METHOD, DEVICE, AND SYSTEM**

(57) An indication information sending method, an indication information receiving method, a device, and a system are provided, and relate to the field of wireless communications technologies. The method includes: generating, by a base station, first indication information, and sending the first indication information to a terminal device; and receiving, by the terminal device, the first indication information, and determining a power control manner of a first channel based on the first indication information, where the first indication information is used to indicate the power control manner of the first channel, the power control manner of the first channel is one power control manner in a power control manner set, and the power control manner set includes at least one power control manner. Because a network device can indicate the power control manner of the first channel to the ter-

terminal device by using the first indication information, compared with the prior art, the terminal device determines a transmit power of a signal in a more flexible manner, so that the terminal device can better adapt to a current network.

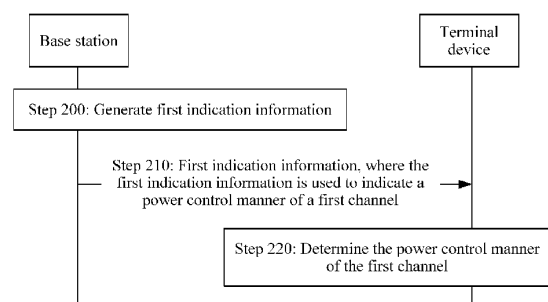


FIG. 2