



(11) **EP 4 455 191 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.10.2024 Bulletin 2024/44

(51) International Patent Classification (IPC):
C08J 3/02^(2006.01)

(21) Application number: **24199985.3**

(52) Cooperative Patent Classification (CPC):
C11D 7/5077; C11D 2111/16

(22) Date of filing: **27.08.2019**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
19943565.2 / 4 022 022

(71) Applicant: **Valvoline Licensing and Intellectual
Property LLC
Lexington, KY 40509 (US)**

(72) Inventor: **BONTA, Jacob
Lexington KY, 40509 (US)**

(74) Representative: **Kutzenberger Wolff & Partner
Waidmarkt 11
50676 Köln (DE)**

Remarks:

This application was filed on 12.09.2024 as a
divisional application to the application mentioned
under INID code 62.

(54) **COMPOSITION FOR USE IN CLEANING METAL COMPONENTS**

(57) A composition for use in cleaning metal components having Hansen Solubility Parameters for the composition of $\delta_D \geq 15$, $\delta_P < 6$, and δ_H from about 5.5 to about 6.9. The composition includes a blend of organic solvents, none of which are classified as a volatile organic compound, a hazardous air pollutant, or a potential carcinogen, or exhibit a vapor pressure of less than 0.1 mm-Hg at 20°C. Further, the blend of organic solvents in-

cludes a halogenated aromatic solvent having one or more halide groups and from 6 to 8 carbon atoms, an organic solvent having one or more ester functional group and from 3 to 9 carbon atoms, and one or more of a linear or branched hydrocarbon solvent with 6-12 carbon atoms with a single polar moiety head group or a solvent containing one or more ketone functional groups and from 2 to 5 carbon atoms.

EP 4 455 191 A2

Description**FIELD**

[0001] This disclosure is directed to a solvent composition for use in cleaning metal components. More specifically, the composition includes a blend of organic solvents that, while being exempted from, or not classified as, a volatile organic compound, a hazardous air pollutant, or a potential carcinogen.

BACKGROUND

[0002] Metal parts cleaners generally fall in to one of two categories: chlorinated solvents and hydrocarbon solvents. Although chlorinated solvents are non-flammable and are not classified as a volatile organic compound (VOC), they are generally considered to be a potential carcinogen and pose an less than acceptable health risk to users. Hydrocarbon solvents, on the other hand, possess favorable cleaning action and fast evaporation without residue, however, they have varying serious health risks, including potential carcinogenic effects. These solvents, such as toluene, benzene, xylene, and hexane, are classified as a VOC or a hazardous air pollutant (HAP), which limits their use in commercial settings. It would be beneficial to create a metal parts cleaner that has the solubility and cleaning action properties of these traditional solvents, but without the associated health risks to the user.

SUMMARY

[0003] A composition for use in cleaning metal components is disclosed. In one embodiment, the Hansen Solubility Parameters for the composition are $\delta D \geq 15$, $\delta P < 6$, and δH from about 5.5 to about 6.9. Moreover, the composition includes a blend of organic solvents. In one embodiment, none of the organic solvents are classified as a volatile organic compound, a hazardous air pollutant, or a potential carcinogen, or wherein the solvent exhibits a vapor pressure of less than 0.1 mmHg at 20°C.

[0004] Specifically, the blend of organic solvents may include a halogenated aromatic solvent having one or more halide groups and from 6 to 8 carbon atoms, wherein the Hansen Solubility Parameters for the halogenated aromatic solvent are in the range of about δD : 17 - 19, δP : 5-7, and δH : 3-5; an organic solvent having one or more ester functional group and from 3 to 9 carbon atoms, wherein the Hansen Solubility Parameters for the organic solvent are in the range of about δD : 14 - 16, δP : 3.5-7.5, and δH : 5-10; and one or more of the following: a linear or branched hydrocarbon solvent with 6-12 carbon atoms with a single polar moiety head group, wherein the Hansen Solubility Parameters for the hydrocarbon solvent are in the range of about δD : 6-9, δP : 1-3, and δH : 5-7; and a solvent containing one or more ketone functional groups and from 2 to 5 carbon atoms, wherein the Hansen Solubility Parameters for the solvent containing one or more ketone functional groups are in the range of about δD : 14-16, δP : 8.5 - 11, and δH : 5-8.

[0005] In one embodiment, the halogenated aromatic solvent is parachlorobenzotrifluoride which is present in an amount from about 0.25% to about 20% of the composition.

[0006] In another embodiment, the organic solvent with one or more ester functional groups is selected from the group consisting of tert-butyl acetate, methyl acetate, dimethyl carbonate, diethylene glycol monoethyl acetate, and diethylene glycol monobutyl ether acetate. In yet another embodiment, the organic solvent with one or more ester functional groups is tert-butyl acetate which is present in an amount from about 25% to about 65% of the composition.

[0007] In another embodiment, the hydrocarbon solvent having a single polar moiety head group is 1-butoxyhexanol or 2-ethyl-hexanol which is present in an amount from about 0.1% to about 1% of the composition.

[0008] In another embodiment, the solvent containing one or more ketone functional groups is acetone which is present in an amount from about 5% to about 50% of the composition.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] The accompanying figures, which are incorporated in and constitute a part of the specification, illustrate various example configurations and data, and are used merely to illustrate various example embodiments. In the figures, like elements bear like reference numerals.

[0010] Figure 1 is the graphical representation of evaporation curves for various example formulations.

DETAILED DESCRIPTION

[0011] A composition for use in cleaning metal parts is provided. Specifically the composition includes a blend of organic solvents. In one embodiment, the blend includes one or more organic solvent, each of which are either 1) not classified as, or are exempt from being classified as, a VOC, a HAP, or a potential carcinogen or 2) have a vapor pressure

of less than 0.1 mmHg at 20°C. Surprisingly, it has been found that this blend of organic solvents exhibits a cleaning action, solubility parameters, and evaporation rates (leading to decreased residue on the component) that are comparable to solvents considered to pose potential health risks.

[0012] Although none of the components of the blended composition are classified (or are exempt from being classified) as a VOC, HAP, or potential carcinogen, the resulting composition exhibits Hansen Solubility Parameters that are similar to those substances. Specifically, the Hansen Solubility Parameters for the blended composition have been found to be $\delta_D \geq 14$ -16, $\delta_P < 3.5$ - 7, and δ_H from about 5.5 to about 6.9.

[0013] In one embodiment, the composition is created by combining a halogenated aromatic solvent having one or more halide groups and from 6 to 8 carbon atoms, an organic solvent having one or more ester functional groups and from 3 to 9 carbon atoms, and one or more of a linear or branched hydrocarbon solvent with 6-12 carbon atoms with a single polar moiety head group and a solvent containing one or more ketone functional groups and from 2 to 5 carbon atoms.

[0014] In one embodiment, the halogenated aromatic solvent having one or more halide groups and from 6 to 8 carbon atoms has Hansen Solubility Parameters that are in the range of about δ_D : 17 - 19, δ_P : 5-7, and δ_H : 3-5 and is present in the composition in an amount of from 0.25% to 20%, and preferably from about 1% to about 9%, of the total composition. Further, it should be understood that these halogenated aromatic solvents are not considered a HAP or potential carcinogen and are exempted from VOC, or they exhibit a vapor pressure of less than about 0.1 mmHg at 20°C. In one embodiment, the halogenated aromatic solvent is parachlorobenzotrifluoride (PCBTf).

[0015] In another embodiment, the organic solvent having one or more ester functional group and from 3 to 9 carbon atoms has Hansen Solubility Parameters that are in the range of about δ_D : 14 - 16, δ_P : 3.5-7.5, and δ_H : 5-10 and is present in the composition in an amount from about 25% to about 65% of the total composition. Further, it should be understood that these ester-containing organic solvents are not considered a HAP or potential carcinogen and are exempted from VOC, or they exhibit a vapor pressure of less than about 0.1 mmHg at 20°C. In one embodiment the ester-containing organic solvent may be methyl acetate, dimethyl carbonate, diethylene glycol monoethyl ether/diethylene glycol monobutyl ether acetate (commercially available from Eastman Chemical Company), t-butyl acetate. In another embodiment, the solvent is t-butyl acetate.

[0016] In another embodiment the linear or branched hydrocarbon solvent with 6-12 carbon atoms and a single polar moiety head group has Hansen Solubility Parameters that are in the range of about δ_D : 6-9, δ_P : 1-3, and δ_H : 5-7 and when present in the composition, is present in the amount of about 0.1 to about 1.2%, and in another embodiment from about 0.1 to about 1.0%. Further, it should be understood that these linear or branched hydrocarbon solvents are not considered a HAP or potential carcinogen and are exempted from VOC, or they exhibit a vapor pressure of less than about 0.1 mmHg at 20°C. In one embodiment, the hydrocarbon solvent is 2-butoxyhexanol or 2-ethylhexanol. In another embodiment, the hydrocarbon solvent is 2-ethylhexanol.

[0017] These medium chain length organic solvents may function as a surfactant, lowering the surface tension between the product and the soiled surfaces. Moreover, the organic solvents have been found to enhance the composition's wetting action, and thus, its cleaning ability without leaving a residue or adversely affecting the drying rate.

[0018] In another embodiment, the solvent containing one or more ketone functional groups and from 2 to 5 carbon atoms has Hansen Solubility Parameters that are in the range of about δ_D : 14-16, δ_P : 8.5 - 11, and δ_H : 5-8 and when present in the composition, is present in an amount of about 5% to about 50%. Further, it should be understood that these solvents are not considered a HAP or potential carcinogen and are exempted from VOC, or they exhibit a vapor pressure of less than about 0.1 mmHg at 20°C. In one embodiment, the solvent containing one or more ketone functional group is acetone. It has been found that the addition of a solvent, such as acetone, enhances the evaporation rate of the blended composition.

Examples

Solvent Effect - Varied Soils

[0019] Individual solvents were evaluated by visual inspection of solvation action when applied to various soils encountered in automotive cleaning procedures. The soils used for testing included 10W-30 motor oil, DOT 3 brake fluid, #2 Lithium Grease, and Power Steering Fluid. Solvation was evaluated on a relative scale: Poor, Fair, Good and Excellent. The rating is based on the solvent's ability to blend with the soil of interest, the rate of the blending, the amount of solvent required to remove the soil from the substrate and the amount of residue left behind by the solvent.

Test Procedure

[0020] In one example, the individual solvents were evaluated. Aluminum test dishes were prepared by applying approximately 5 drops of each soil to the dishes. Neat solvent was added dropwise beside each soil so that the edges

EP 4 455 191 A2

of the two materials came in contact with one another. The solvation action of the solvent was observed. The extent to which the soil and the solvent mixed and the rate of mixing was observed. Additional solvent was then applied to each section and the dish was lifted to observe the removal of the soil. Another addition of solvent was applied by pipette (approx. 1-2 mL) to observe the spray-off characteristics of each soil/solvent combination.

Relative Solvation Rating Standards - Table 1

Rating	Explanation
Poor	Little or no solvation. Very slow rate of solvation. Large amount of soil residue after spray.
Fair	Some, slow solvation effect. Slow to Moderate solvation rate. Moderate amount of soil residue after spray.
Good	Significant solvation effect. Moderate to rapid solvation rate. Small amount of residue after spray.
Excellent	Significant solvation effect. Rapid/extensive solvation rate. No soil residue after spray.

[0021] The results of the Hansen Solubility calculations and evaporation rate data are shown below in Table 2:

Table 2

Solvents	VOC	Hansen Data				Evaporation Rate (BuAc = 1)
		dD	dP	dH	MVol	
Toluene	Yes	18	1.4	2	106.6	1.9
Xylene	Yes	17.6	1	3.1	123.9	0.6
Heptane	Yes	15.3	0	0	147	4.3
Eastman EEH	No	7.8	2	2.5	195.9	0.003
2-ethyl hexanol	No	7.8	1.6	5.8	123.9	< 0.01
dibasic ester LVP	No	8.3	2.2	0	151.21	0.009
Dowanol Eph	No	17.8	5.7	14.3	124.5	0.001
Eastman Omnia	No	7.87	3.13	5.62	164.99	0.01
Eastman DE Acetate	No	7.9	2.5	4.5	174.12	0.008
Eastman DB Acetate	No	7.8	3.4	5.2	208.44	0.003
Eastman DP Solvent	No	7.8	3.5	5.5	152.78	0.01
Eastman Texanol	No	7.8	3.5	5.5	152.78	0.002
Acetone	No	15.5	10.4	7	73.8	14.4
PCBTF	No	18	5.9	3.9	134.75	0.9
t-butyl acetate	No	15	3.7	6	132.6	2.8
dimethyl carbonate	No	8.5	4.7	1.9	84.2	3.22
Carbitol Solvent	No	16.1	9.2	12.2	135.56	0.01
Methyl Acetate	No	15.5	7.2	7.6	79.8	6
Propylene Carbonate	No	20	18	4.1	85.2	0.005

[0022] The results of the Solvent Effect data for various soils are shown below in Table 3:

Table 3

		Solvent Effect - Varied Soils			
Solvents	VOC	Motor Oil	Brake Fluid	Power Steering Fluid	Greases
Toluene	Yes	Excellent	Good	Good	Good
Xylene	Yes	Excellent	Good	Good	Good
Heptane	Yes	Excellent	Good	Good	Good
Eastman EEH	No	Good	Good	Fair	Fair
2-ethyl hexanol	No	Good	Fair	Poor	Excellent
dibasic ester LVP	No	Poor/Fair	Poor	Poor/Fair	Good
Dowanol Eph	No	Good	Excellent	Good	Fair
Eastman Omnia	No	Good	Good	Good	Poor/Fair
Eastman DE Acetate	No	Fair/Good	Good	Fair/Good	Poor
Eastman DB Acetate	No	Fair/Good	Good	Fair/Good	Poor
Eastman DP Solvent	No	Fair/Good	Good	Fair/Good	Poor
Eastman Texanol	No	Good	Fair/Good	Good	Poor
Acetone	No	Poor	Good	Excellent	Poor
PCBTF	No	Excellent	Excellent	Fair	Fair
t-butyl acetate	No	Excellent	Excellent	Fair	Fair
dimethyl carbonate	No	Poor	Good	Good	Poor
Carbitol Solvent	No	Fair/Good	Good	Good	Poor
Methyl Acetate	No	Fair/Good	Excellent	Good	Poor
Propylene Carbonate	No	Fair	Fair/Good	Good	Poor

[0023] Solvation in this context can be readily characterized by example. "No solvation" can be described by two materials that will not blend in any proportions, i.e. oil and water. For example, if a drop of oil and a drop of water are placed beside each other with edges touching, they will not blend and thus have no solvation. The opposite, and thus "excellent solvation," would be two materials that are miscible and will blend in any proportion. One example would be water and ethanol. If a drop of each were placed beside one another, with edges touching, the two would rapidly blend together and form a homogenous phase. Most materials have some degree of solubility with each other. The relative scale used above describes this, but also includes an observation of the rate at which it occurs. Excellent is near instantaneous. Good occurs over 1-3 seconds. Fair is over 5-20 seconds and poor requires significant time to solvate 30 seconds to several minutes. Similar quantification methods were used for the solvent blend tests, described below.

Solvent Blend Effects - Application Testing on Varied Soils

[0024] In one example, the solvent blends were evaluated by visual inspection of their solvation action when applied to various soils encountered in automotive cleaning procedures. The soils used for testing were 10W-30 motor oil, DOT 3 brake fluid, #2 Lithium Grease, and Power Steering Fluid. Solvation was evaluated on a relative scale: Poor, Fair, Good and Excellent. The rating is based on the solvent blends ability to remove various soils from test panels. The effect is bracketed by the performance of the 10% VOC Parts cleaner on the low end and by the 45% VOC Parts Cleaner on the upper end and characterizes the solvent blend's ability to blend with the soil of interest, the rate of the blending, the amount of solvent blend required to remove the soil from the substrate, and the amount of residue left behind by the solvent.

Test Procedure

[0025] Steel test panels were prepared by the following method. A thin film of NLGI #2 lithium complex grease, polyurea grease, and calcium sulfonate grease were applied to the steel test panels in sections with a rag. Approximately 3-5 mL of 10w-30 conventional motor oil, DOT 3 brake fluid, and power steering fluid were then applied in small puddles and

EP 4 455 191 A2

smearred with a rag or paper towel. The panels were then baked at 60 °C for approximately 16 hours to simulate service conditions.

[0026] Once the panels were prepared, the individual solvent blends were prepared by mixing together the individual components in a glass beaker and then stirring the blends for 1-2 minutes. About 200 g of the blends were then charged into standard 12 oz aerosol cans. The cans were then pressurized to approximately 100 PSI with CO₂, shaken well, and allowed to sit at least two hours to ensure CO₂ dissolution.

[0027] The individual solvent blends were then tested by the following method. Performance of test blends were compared to the Valvoline Professional Series (VPS) 10% VOC Parts Cleaner (commercially available from Valvoline LLC), for a low performance mark, and the VPS 45% VOC Parts Cleaner (commercially available from Valvoline LLC), for a high-performance mark. In a well-ventilated area or fume hood, the prepared panels were positioned above a catch pan. The test blends were then sprayed onto the soils in 2-3 second bursts, targeting each soil type individually. Each test blend was allowed to penetrate the soils for approximately 5-10 seconds. The test blends were then sprayed onto the soils again, targeting each soil type individually for an additional 2-3 second burst.

[0028] The cleaning performance was inspected visually between the first and second burst and after the panel was allowed to dry. They were evaluated by the same relative rating standards as above.

[0029] The compositions of the sample solvent blends are set forth in Table 4 below:

Table 4

Sample #	Acetone	t-butyl acetate	PCBTF	2-ethylhexanol	Eastman EEH
1	50	25	25	0	0
2	75	12.5	12.5	0	0
3	90	5	5	0	0
4	50	50	0	0	0
5	75	25	0	0	0
6	90	10	0	0	0
7	50	0	50	0	0
8	75	0	25	0	0
9	90	0	10	0	0
10	80	10	10	0	0
11	80	15	5	0	0
12	80	5	15	0	0
13	75	15	10	0	0
14	75	20	5	0	0
15	75	10	15	0	0
16	65	35	0	0	0
17	65	25	10	0	0
18	65	30	5	0	0
19	50	40	10	0	0
20	50	45	5	0	0
21	25	65	10	0	0
22	0	85	15	0	0
23	65	32.5	2.5	0	0
24	50	0	0	50	0
25	75	0	0	25	0
26	65	0	0	35	0

EP 4 455 191 A2

(continued)

Sample #	Acetone	t-butyl acetate	PCBTF	2-ethylhexanol	Eastman EEH
27	90	0	0	10	0
28	0	50	0	50	0
29	0	65	0	35	0
30	0	75	0	25	0
31	0	90	0	10	0
32	65	0	0	0	35
33	75	0	0	0	25
34	90	0	0	0	10
35	0	65	0	0	35
36	0	75	0	0	25
37	0	90	0	0	10
38	50	45	2.5	2.5	0
39	50	45	4	1	0
40	50	40	9	1	0
41	50	40	0	10	0
42	50	45	0	5	0
43	50	40	5	5	0
44	0	90	5	5	0
45	0	90	9	1	0
46	29	65	5	1	0
47	0	95	4	1	0
48	29	67.5	2.5	1	0
49	0	96.5	2.5	1	0

[0030] The Hansen Solubility Parameters were calculated for each sample. The data from those calculations are provided below in Table 5.

Table 5

Sample #	Hansen Solubility Parameters		
	dD	dP	dH
1	13.8	6.9	5.5
2	15.8	9.0	6.5
3	15.6	9.84	6.795
4	15.25	7.05	6.5
5	15.375	8.725	6.75
6	15.45	9.73	6.9
7	16.75	8.15	5.45
8	16.125	9.275	6.225
9	15.75	9.95	6.69

EP 4 455 191 A2

(continued)

5

10

15

20

25

30

35

40

45

50

55

Sample #	Hansen Solubility Parameters		
	dD	dP	dH
10	15.7	9.28	6.59
11	15.55	9.17	6.695
12	15.85	9.39	6.485
13	15.675	8.945	6.54
14	15.525	8.835	6.645
15	15.825	9.055	6.435
16	15.325	8.055	6.65
17	15.625	8.275	6.44
18	15.475	8.165	6.545
19	15.55	7.27	6.29
20	15.4	7.16	6.395
21	15.425	5.595	6.04
22	15.45	4.03	5.685
23	15.4	8.11	6.5975
24	11.65	6	6.4
25	13.575	8.2	6.7
26	12.805	7.32	6.58
27	14.73	9.52	6.88
28	11.4	2.65	5.9
29	12.48	2.965	5.93
30	13.2	3.175	5.95
31	14.28	3.49	5.98
32	12.805	7.46	5.425
33	13.575	8.3	5.875
34	14.73	9.56	6.55
35	12.48	3.105	4.775
36	13.2	3.275	5.125
37	14.28	3.53	5.65
38	15.145	7.0525	6.4425
39	15.298	7.117	6.414
40	15.448	7.227	6.309
41	14.53	6.84	6.48
42	14.89	6.945	6.49
43	15.04	7.055	6.385
44	14.79	3.705	5.885
45	15.198	3.877	5.809
46	15.223	5.732	6.183

EP 4 455 191 A2

(continued)

Sample #	Hansen Solubility Parameters		
	dD	dP	dH
47	15.048	3.767	5.914
48	15.148	5.677	6.2355
49	15.003	3.734	5.9455

[0031] The results of the solvent removal data are set forth in Table 6, below.

Table 6

Sample #	Observations (based on a summary of all soils used)			
	Solvency	Soil Removal	Evaporation Rate	Residue
1	Fair	Fair	Fair (slow)	Significant
2	Fair	Poor	Fair	Extensive
3	Poor	Poor	Too fast	Extensive
4	Fair	Good	Fair	Significant
5	Fair	Fair	-	Significant
6	Poor	Poor	Too fast	Extensive
7	Good	Good	Too slow	Significant
8	Fair	Good	Too slow	Significant
9	Poor	Fair	Fair	Extensive
10	Fair	Fair	Fair	Extensive
11	Fair	Fair	Fair	Extensive
12	Fair	Fair	Too slow	Extensive
13	Fair	Good	Fair	Significant
14	Good	Good	Fair	Significant
15	Fair	Good	Too slow	Significant
16	Good	Fair	Fair	Minimal
17	Good	Good	Good	Minimal
18	Good	Good	Good	Minimal
19	Excellent	Good	Good	Minimal
20	Excellent	Good	Good	Minimal
21	Excellent	Good	Fair	None
22	Excellent	Good	Fair	None
23	Good	Fair	Good	Significant
24	Poor	Fair	Too slow	Extensive
25	Fair	Fair	Too slow	Extensive
26	Fair	Good	Too slow	Significant
27	Poor	Fair	Too slow	Extensive
28	Fair	Good	Too slow	None
29	Good	Good	Too slow	None

(continued)

Sample #	Observations (based on a summary of all soils used)			
	Solvency	Soil Removal	Evaporation Rate	Residue
30	Good	Good	Too slow	None
31	Excellent	Excellent	Too slow	None
32	Fair	Good	Too slow	Significant
33	Fair	Good	Too slow	Significant
34	Poor	Poor	Fair	Significant
35	Good	Good	Too slow	None
36	Good	Good	Too slow	None
37	Excellent	Excellent	Fair	None
38	Good	Good	Fair	Minimal
39	Good	Good	Good	Minimal
40	Good	Good	Good	Minimal
41	Good	Excellent	Too slow	Significant
42	Good	Excellent	Too slow	Significant
43	Good	Excellent	Too slow	Significant
44	Excellent	Excellent	Poor	None
45	Excellent	Excellent	Good	None
46	Excellent	Excellent	Good	None
47	Excellent	Excellent	Fair	None
48	Excellent	Excellent	Excellent	None
49	Excellent	Excellent	Good	None

[0032] It will be understood that if a composition has an evaporation rate that is deemed to be "too slow," the solvent composition can be observed to linger on the cleaning surface or area around it for a significant amount of time (approximately 5 to about 10 minutes). If an evaporation rate is too slow, one would have to clean the soiled surface by another means (rag/paper towel, etc.) before continuing work.

[0033] Conversely, if a composition has an evaporation rate that is considered to be "too fast," the solvent composition does not dwell long enough on the soiled surface to either solvate the soil completely or facilitate its transport from the surface being cleaned. This results in having to use more product to transport the soil from the surface of the component being cleaned and can result in significant residue as well.

[0034] As can be seen from the data above, blended compositions that include about 25 to 30% acetone, about 97 to 65% t-butyl acetate, about 2.5 to about 5% PCBTF, and about 1% 2-ethylhexanol produce high quality cleaning composition, without the expected health risks generally associated with known metal parts cleaners. In one embodiment, the blended composition will preferably include about 29% acetone, about 67.5% t-butyl acetate, about 2.5% PCBTF, and about 1% 2-ethylhexanol, as in Sample #48..

[0035] There seems to be a strong relation between soil removal efficiency and the evaporation rate of the composition, with slow evaporation rates favoring improved soil removal. Moreover, while large amounts of 2-ethylhexanol appeared to negatively impact the evaporation rate of the overall composition, small amounts, that is less than about 2.5% of the total weight percent of the blend, appear to improve the wetting action of the other solvents and helped to improve the soil removal action of the blended composition. While not being bound to theory, it is believed that the presence of a small amount of 2-ethylhexanol reduces the evaporation rate of the composition enough to allow for thorough penetration of persistent soils, thus reducing the amount of blended composition required to achieve acceptable soil removal.

[0036] To that end, the evaporation rates of examples formulations were compared. Approximately 3 grams of each sample were weighed onto a 3 inch watch glass and left exposed in a fume hood at a face velocity of 109 feet per minute (FPM). The weight change of each sample was recorded as a function of time over approximately 15 - 17. As shown in

Figure 1, this data was then plotted by weight change per minute. With continuing reference to Figure 1, it was found that the methyl acetate and PCBTF formula, lost nearly 85% of its weight in only 16 minutes. Sample #48, however, performed much better, losing only about 67.7%, while the toluene composition lost only 41.5% weight. The optimized evaporation rate of Sample #48 allow the formulations to remain on the soil for longer periods of time, increasing the soil removal capability, while minimizing the residue left behind.

[0037] In addition, the data shows that small amounts of PCBTF, from about 2.0% to about 20%, appears to have a synergistic solvation effect with acetone and t-butyl acetate. It is likely that the presence of an aromatic moiety and a chlorinated/fluorinated functionality contributes to this effect.

[0038] Finally, the data shows that the ability to control the evaporation rate has a large impact on the blended composition's overall performance. Preferably, a "stepwise" evaporation curve, with components in increasingly small amounts, with increasingly slower evaporation rates allows for soil penetration, but prevents a significant amount of residual cleaner from remaining on the soiled component part. This will ultimately improve the performance of the blended composition and reduce the amount needed.

[0039] While the invention has been described with respect to specific examples including presently preferred modes of carrying out the invention, those skilled in the art will appreciate that there are numerous variations and permutations of the above described systems and techniques that fall within the spirit and scope of the invention as set forth in the appended claims.

[0040] The invention is further drawn to the following embodiments ("embs"):

Emb 1. A composition for use in cleaning metal components, wherein the Hansen Solubility Parameters for the composition are δ_D from about 12.0 to about 16.0, δ_P from about 3.0 to about 10.0, and δ_H from about 4.0 to about 6.9, and wherein the composition comprises a blend of organic solvents, wherein either none of the solvents are classified as a volatile organic compound, a hazardous air pollutant, or a potential carcinogen, or wherein the solvent exhibits a vapor pressure of less than 0.1 mmHg at 20°C, wherein the blend of organic solvents comprises:

a halogenated aromatic solvent having one or more halide groups and from 6 to 8 carbon atoms, wherein the Hansen Solubility Parameters for the halogenated aromatic solvent are in the range of about δ_D : 17 - 19, δ_P : 5-7, and δ_H : 3-5;

an organic solvent having one or more ester functional group and from 3 to 9 carbon atoms, wherein the Hansen Solubility Parameters for the organic solvent are in the range of about δ_D : 14 - 16, δ_P : 3.5-7.5, and δ_H : 5-10; and one or more of the following:

a linear or branched hydrocarbon solvent with 6-12 carbon atoms with a single polar moiety head group, wherein the Hansen Solubility Parameters for the hydrocarbon solvent are in the range of about δ_D : 6-9, δ_P : 1-3, and δ_H : 5-7; and

a solvent containing one or more ketone functional groups and from 2 to 5 carbon atoms, wherein the Hansen Solubility Parameters for the solvent containing one or more ketone functional groups are in the range of about δ_D : 14-16, δ_P : 8.5 - 11, and δ_H : 5-8.

Emb 2. The composition of Emb 1, wherein the halogenated aromatic solvent is parachlorobenzotrifluoride, and wherein the parachlorobenzotrifluoride is present in an amount from about 0.25% to about 20% of the composition.

Emb 3. The composition of Emb 1, wherein the organic solvent with one or more ester functional groups is selected from the group consisting of tert-butyl acetate, methyl acetate, dimethyl carbonate, diethylene glycol monoethyl acetate, and diethylene glycol monobutyl ether acetate.

Emb 4. The composition of Emb 3, wherein the organic solvent with one or more ester functional groups is tert-butyl acetate, and wherein the tert-butyl acetate is present in an amount from about 15% to about 95% of the composition.

Emb 5. The composition of Emb 1, wherein the hydrocarbon solvent having a single polar moiety head group is 1-butoxyhexanol or 2-ethyl-hexanol, and wherein the hydrocarbon solvent is present in an amount from about 0.1% to about 2.5% of the composition.

Emb 6. The composition of Emb 1, wherein the solvent containing one or more ketone functional groups is acetone, and where in the acetone is present in an amount from about 5% to about 75% of the composition.

Emb 7. The composition of Emb 6, wherein the organic solvent with one or more ester functional groups is selected from the group consisting of tert-butyl acetate, methyl acetate, dimethyl carbonate, diethylene glycol monoethyl acetate, and diethylene glycol monobutyl ether acetate.

Emb 8. The composition of Emb 7, wherein the organic solvent with one or more ester functional groups is tert-butyl acetate.

Emb 9. The composition of Emb 6, wherein the composition further comprises a hydrocarbon solvent having a single polar moiety head group, and wherein the hydrocarbon solvent is 1-butoxyhexanol or 2-ethyl-hexanol.

Emb 10. A composition for use in cleaning metal components, wherein the Hansen Solubility Parameters for the composition are $\delta_D \geq 15$, $\delta_P < 6$, and δ_H from about 5.5 to about 6.9, and wherein the composition comprises a blend of organic solvents, and wherein either none of the solvents are classified as a volatile organic compound, a hazardous air pollutant, or Potential Carcinogen, or wherein the organic solvent exhibits a vapor pressure of less than 0.1 mmHg at 20°C, the blend of organic solvents comprising:
from about 1% to about 9% parachlorobenzotrifluoride; and from about 25% to about 70% tert-butyl acetate; and one or more of the following:

from about 0.1 to about 1% 2-ethylhexanol, and

from about 5% to about 75% acetone.

Emb 11. The composition of Emb 10, wherein the composition comprises both 2-ethylhexanol and acetone.

Emb 12. The composition of Emb 11, wherein the composition comprises about 25% to about 29% acetone, about 65% to about 67.5% t-butyl acetate, about 1% to about 2.5% PCBTF, and about 1% 2-ethylhexanol.

Claims

1. A composition for use in cleaning metal components, wherein the Hansen Solubility Parameters for the composition are δ_D from about 12.0 to about 16.0, δ_P from about 3.0 to about 10.0, and δ_H from about 4.0 to about 6.9, and wherein the composition comprises a blend of organic solvents, wherein either none of the solvents are classified as a volatile organic compound, a hazardous air pollutant, or a potential carcinogen, or wherein the solvent exhibits a vapor pressure of less than 0.1 mmHg at 20°C, wherein the blend of organic solvents comprises:

a halogenated aromatic solvent having one or more halide groups and from 6 to 8 carbon atoms, wherein the Hansen Solubility Parameters for the halogenated aromatic solvent are in the range of about δ_D : 17 - 19, δ_P : 5-7, and δ_H : 3-5 and wherein the halogenated aromatic solvent is not parachlorobenzotrifluoride (PCBTF);
an organic solvent having one or more ester functional group and from 3 to 9 carbon atoms, wherein the Hansen Solubility Parameters for the organic solvent are in the range of about δ_D : 14 - 16, δ_P : 3.5-7.5, and δ_H : 5-10; and one or more of the following:

a linear or branched hydrocarbon solvent with 6-12 carbon atoms with a single polar moiety head group, wherein the Hansen Solubility Parameters for the hydrocarbon solvent are in the range of about δ_D : 6-9, δ_P : 1-3, and δ_H : 5-7; and

a solvent containing one or more ketone functional groups and from 2 to 5 carbon atoms, wherein the Hansen Solubility Parameters for the solvent containing one or more ketone functional groups are in the range of about δ_D : 14-16, δ_P : 8.5 - 11, and δ_H : 5-8.

2. The composition of claim 1, wherein the organic solvent with one or more ester functional groups is selected from the group consisting of tert-butyl acetate, methyl acetate, dimethyl carbonate, diethylene glycol monoethyl acetate, and diethylene glycol monobutyl ether acetate.

3. The composition of claim 2, wherein the organic solvent with one or more ester functional groups is tert-butyl acetate, and wherein the tert-butyl acetate is present in an amount from about 15% to about 95% of the composition.

4. The composition of claim 1, wherein the hydrocarbon solvent having a single polar moiety head group is 1-butoxy-

hexanol or 2-ethyl-hexanol, and wherein the hydrocarbon solvent is present in an amount from about 0.1% to about 2.5% of the composition.

- 5 **5.** The composition of claim 1, wherein the solvent containing one or more ketone functional groups is acetone, and where in the acetone is present in an amount from about 5% to about 75% of the composition.
- 6.** The composition of claim 5, wherein the organic solvent with one or more ester functional groups is selected from the group consisting of tert-butyl acetate, methyl acetate, dimethyl carbonate, diethylene glycol monoethyl acetate, and diethylene glycol monobutyl ether acetate.
- 10 **7.** The composition of claim 6, wherein the organic solvent with one or more ester functional groups is tert-butyl acetate.
- 8.** The composition of claim 5, wherein the composition further comprises a hydrocarbon solvent having a single polar moiety head group, and wherein the hydrocarbon solvent is 1-butoxyhexanol or 2-ethyl-hexanol.
- 15

20

25

30

35

40

45

50

55

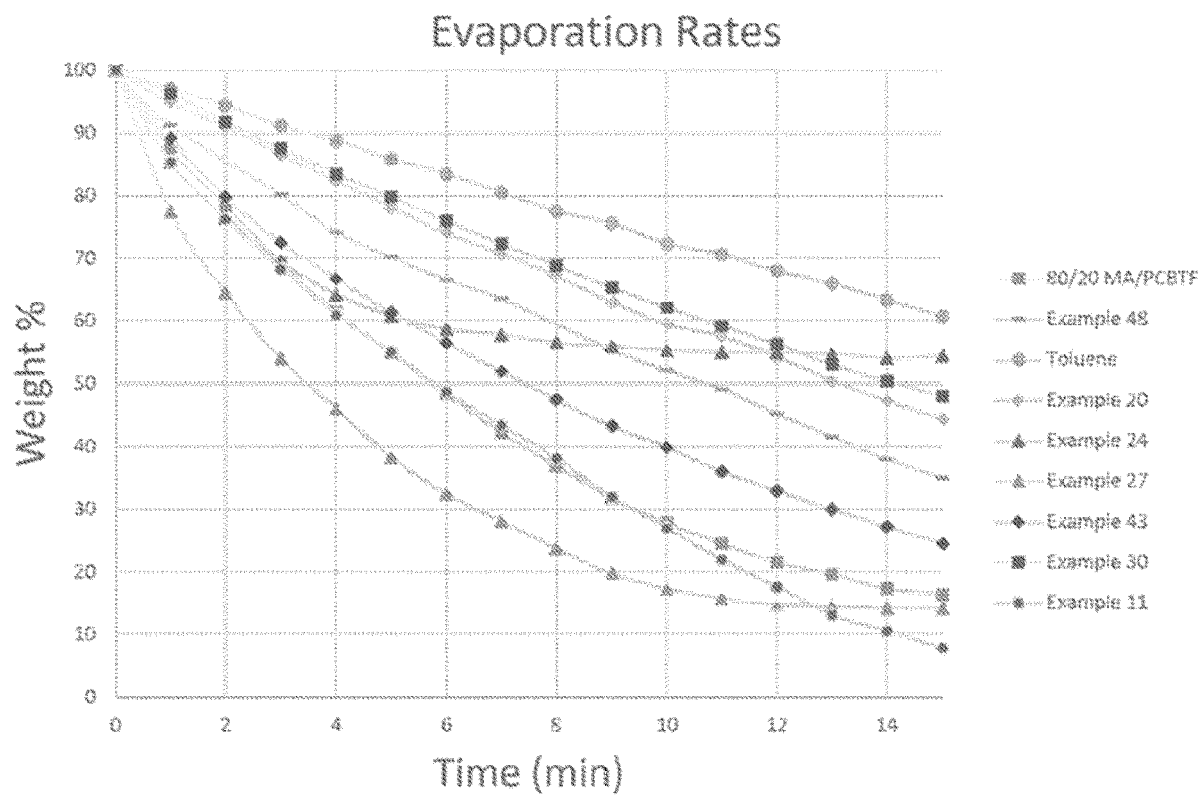


FIG 1