



(11)

EP 4 528 002 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:
26.03.2025 Bulletin 2025/13

(21) Application number: **23807727.5**

(22) Date of filing: **19.05.2023**

(51) International Patent Classification (IPC):
D04B 1/14 ^(2006.01) **D06C 7/02** ^(2006.01)
A41D 31/00 ^(2019.01) **A41D 31/04** ^(2019.01)

(52) Cooperative Patent Classification (CPC):
A41D 31/00; A41D 31/04; D04B 1/14; D06C 7/02

(86) International application number:
PCT/JP2023/018819

(87) International publication number:
WO 2023/224126 (23.11.2023 Gazette 2023/47)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC ME MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA
Designated Validation States:
KH MA MD TN

(30) Priority: **19.05.2022 JP 2022082074**

(71) Applicants:
• **JP. Avance Corporation**
Sakai-shi, Osaka 590-0144 (JP)
• **Avance International Company Limited**
New Territories, Hong Kong (HK)

(72) Inventor: **YAMAO Tomoatsu**
Sakai-shi, Osaka 590-0144 (JP)

(74) Representative: **Betten & Resch**
Patent- und Rechtsanwälte PartGmbB
Maximiliansplatz 14
80333 München (DE)

(54) **KNITTED PRODUCT, AND PRODUCTION METHOD FOR KNITTED PRODUCT**

(57) [Problem]

Provided is: a knitted product that uses a natural fiber yarn and/or a synthetic fiber yarn and can effectively prevent shrinkage and stretching of a ground yarn without using a large-scale heat treatment apparatus; and a method for producing the knitted product.

[Solution]

A heat-fusible yarn that melts at 105°C or less is fused with a whole or a part of a ground yarn that is a natural fiber yarn and/or a synthetic fiber yarn. A knitted

product including the heat-fusible yarn in an unmelted state is efficiently produced by form-knitting with use of a flat knitting machine while knitting the heat-fusible yarn into the whole or a part of the ground yarn. The heat-fusible yarn melts at 105°C or less, thereby causing the heat-fusible yarn to melt and to be fused with the ground yarn by a steam iron without using a large-scale heat treatment apparatus. The heat-fusible yarn is fused with the ground yarn of the knitted product, thereby preventing shrinkage and stretching of the ground yarn.

EP 4 528 002 A1

Description

Technical Field

5 **[0001]** The present invention relates to a knitted product, such as a sweater or a cardigan.

Background Art

10 **[0002]** For circular knitted fabrics used for knitted products that include corrective innerwear products including girdles, leggings and bras, and compression wear including sports bottom wear and sports underwear, there is a circular knitted fabric that has high stretching parts and low stretching parts (see Patent Literature (PTL) 1, for example).

[0003] In the circular knitted fabric disclosed in PTL 1, the same ground yarn is used for the low stretching parts and the high stretching parts. The low stretching parts contain a heat-fusible yarn, at least parts of which are thermally fused with each other. For the ground yarn in the circular knitted fabric disclosed in PTL 1, an elastic yarn, such as a polyurethane-based yarn or a polyether ester-based yarn, is used. The heat-fusible yarn in the circular knitted fabric disclosed in PTL 1 is a fiber that has the properties of melting and fusing due to heat treatment with dry heat at 120°C for 1 minute, or due to heat treatment with wet heat at 110°C for 30 seconds. As the heat-fusible yarn, a polyamide-based fiber, a polyester-based fiber, a polyurethane-based fiber, or other types of fiber are used.

20 Citation List

Patent Literature

25 **[0004]** PTL 1: Japanese Patent No. 5688240

Summary of Invention

Technical Problem

30 **[0005]** A knit is formed by continuously forming loops, and thus has advantages of, for example, higher stretchability, higher flexibility, and higher heat retaining effect, compared with woven fabrics.

[0006] However, general knitted products in which a natural fiber yarn and/or a synthetic fiber yarn is used have disadvantages of easily losing shape, for example, stretching due to gravity when hung on a hanger, and of shrinking due to washing or the like.

35 **[0007]** Particularly, in the case of a knitted product in which a natural fiber yarn is used, when such a knitted product is washed with water, hydrophilic fiber may absorb moisture, thus thickening and shortening, leading to shrinkage of approximately 10%, for example.

[0008] In the case where a wool yarn is used as the natural fiber yarn, when a knitted product is washed with water or the like, a rubbing force, a scrubbing force, a pressing force, and other forces are applied to the knitted product in a wet state, so that fibers are tangled, thus causing shrinkage (felting).

40 **[0009]** In order to prevent shrinkage and stretching of the ground yarn, the heat-fusible yarn in the circular knitted fabric disclosed in PTL 1 may be used for knitted products, such as sweaters or cardigans, in which a natural fiber yarn and/or a synthetic fiber yarn is used. In such a case, it is necessary to perform heat treatment with dry heat at 120°C for 1 minute, or heat treatment with wet heat at 110°C for 30 seconds in order to cause the heat-fusible yarn to be fused with the ground yarn. In the case of performing the heat treatment with dry heat at 120°C for 1 minute, or heat treatment with wet heat at 110°C for 30 seconds, there is a concern that fibers may be damaged, thus compromising the feel of the knitted products depending on the natural fiber yarn and/or the synthetic fiber yarn used in the knitted products.

45 **[0010]** In addition, to perform the heat treatment with dry heat at 120°C for 1 minute, or the heat treatment with wet heat at 110°C for 30 seconds, it is necessary to use a large-scale heat treatment apparatus, such as a pin tenter dry heat setting machine or an autoclave wet heat setting machine, after a knitted fabric including a heat-fusible yarn is knitted. Accordingly, required capital investment becomes necessary, and small lot production becomes difficult. In the case where heat treatment on a knitted fabric including a heat-fusible yarn is requested of a factory having the large-scale heat treatment apparatus, a long production period is required.

50 **[0011]** An object of the present invention is to effectively prevent shrinkage and stretching of a ground yarn of a knitted product in which a natural fiber yarn and/or a synthetic fiber yarn is used, without compromising the feel of the knitted product and without using a large-scale heat treatment apparatus.

Solution to Problem

[0012] A knitted product according to a first aspect of the present invention is a knitted product in which a natural fiber yarn and/or a synthetic fiber yarn is used. In the knitted product, a heat-fusible yarn that melts at 105°C or less is fused with a whole or a part of a ground yarn.

[0013] In a knitted product according to a second aspect of the present invention in the knitted product according to the first aspect, the knitted product is formed by a flat knitting machine.

[0014] In a knitted product according to a third aspect of the present invention in the knitted product according to the first aspect or the second aspect, the heat-fusible yarn is a nylon heat-fusible yarn having a melting point of 75°C or more and 90°C or less.

[0015] In a knitted product according to a fourth aspect of the present invention in the knitted product according to the first aspect, fineness of the heat-fusible yarn is 30 deniers or more and 150 deniers or less.

[0016] A method for producing a knitted product according to a fifth aspect of the present invention includes: a first step in which, while a heat-fusible yarn that melts at 105°C or less is knitted into a whole or a part of a ground yarn that is a natural fiber yarn and/or a synthetic fiber yarn, a knitted product including the heat-fusible yarn in an unmelted state is produced by a flat knitting machine; and a second step in which the heat-fusible yarn in the knitted product that has undergone the first step is melted by a steam iron to cause the heat-fusible yarn to be fused with the ground yarn.

[0017] In a method for producing a knitted product according to a sixth aspect of the present invention in the method for producing a knitted product according to the fifth aspect, the heat-fusible yarn is a nylon heat-fusible yarn having a melting point of 75°C or more and 90°C or less.

Advantageous Effects of Invention

[0018] The knitted product according to the present invention, and the knitted product produced by the method for producing a knitted product according to the present invention include a natural fiber yarn and/or a synthetic fiber yarn. A heat-fusible yarn is fused with the whole or a part of the ground yarn, thereby preventing shrinkage and stretching of the ground yarn that is the natural fiber yarn and/or the synthetic fiber yarn.

[0019] A knitted product including the heat-fusible yarn in an unmelted state is produced by form-knitting with use of, for example, a flat knitting machine while knitting the heat-fusible yarn into the whole or a part of the ground yarn that is the natural fiber yarn and/or the synthetic fiber yarn, thereby reducing the amount of usage of yarn and cutting loss, and also efficiently producing the knitted product including the heat-fusible yarn in an unmelted state.

[0020] The heat-fusible yarn melts at 105°C or less. Accordingly, it is possible to cause, without using a large-scale heat treatment apparatus, the heat-fusible yarn to melt and to be fused with the ground yarn by performing efficient work with a steam iron, i.e., by moving the steam iron in such a way as to steam a knitted product at desired portions at which the heat-fusible yarn is present. Therefore, there is no possibility of compromising the feel of the knitted product, and it is possible to achieve small lot and short cycle production that is suited to individualized and diversified needs of consumers.

Brief Description of Drawings

[0021]

[FIG. 1] FIG. 1 is a stitch diagram of a Milano rib stitch.

[FIG. 2] FIG. 2 is a stitch diagram of a half cardigan stitch.

Description of Embodiment

<Knitted product>

[0022] A knitted product of the present invention includes a natural fiber yarn and/or a synthetic fiber yarn. Specifically, the knitted product is any one of a knitted product including only a natural fiber yarn, a knitted product including only a synthetic fiber yarn, or a knitted product including a blended yarn obtained by blending a natural fiber and a synthetic fiber at a predetermined mixing ratio. The fineness of the yarn ranges from 1 yarn count to 100 yarn count. For the natural fiber yarn, for example, a cotton yarn, a wool yarn, an animal hair yarn, or the like is used. For the synthetic fiber yarn, an acrylic yarn, a polyester yarn, or the like is used.

[0023] The knitted product of the present invention includes general knitted products that are formed by a flat knitting machine, and may be, for example, clothing, such as sweaters, cardigans, dresses and skirts, bags, such as tote bags, handbags and backpacks, and add-on pads for clothing, such as shoulder pads and knee pads.

[0024] There is no limitation on the type of knitting stitch for the knitted product of the present invention. That is, any

knitting stitch may be used for the knitted product of the present invention provided that the knitting stitch is for flat knitting, and a plain stitch, a rib stitch, a Milano rib stitch, a cardigan stitch, a seed stitch, a garter stitch (pearl stitch), a lace stitch, or other stitches may be used.

[0025] In the knitted product of the present invention, a heat-fusible yarn that melts at 105°C or less is fused with the whole or a part of a ground yarn that is the natural fiber yarn and/or the synthetic fiber yarn. The heat-fusible yarn melts at 105°C or less, and is, for example, a nylon heat-fusible yarn having a melting point of 75°C or more and 90°C or less.

[0026] The fineness of the heat-fusible yarn is 30 deniers or more and 150 deniers or less, and the heat-fusible yarn is selected to obtain the desired feel of the knitted fabric in terms of the thickness and hardness.

[0027] In the knitted product of the present invention, the heat-fusible yarn is fused with the whole or a part of the ground yarn that is the natural fiber yarn and/or the synthetic fiber yarn. Accordingly, it is possible to prevent shrinkage and stretching of the ground yarn. By knitting a natural fiber, which is the ground yarn, and the heat-fusible yarn in a desired balance, it is possible to control the shrinkage ratio of the natural fiber.

<Method for producing knitted product>

[0028] The knitted product of the present invention is produced by a flat knitting machine that forms a shape according to pattern. That is, while a heat-fusible yarn that melts at 105°C or less is knitted into the whole or a part of the ground yarn that is the natural fiber yarn and/or the synthetic fiber yarn, a knitted product including the heat-fusible yarn in an unmelted state is produced by the flat knitting machine (first step). The knitted product is produced by form-knitting with use of, for example, the flat knitting machine, thereby reducing the amount of usage of yarn and cutting loss, and also efficiently producing the knitted product including the heat-fusible yarn in an unmelted state.

[0029] Next, a steam iron that emits high temperature water steam from holes on the bottom surface is used on the knitted product including the heat-fusible yarn in an unmelted state to melt the heat-fusible yarn so that the heat-fusible yarn is fused with the ground yarn (second step). The heat-fusible yarn melts at 105°C or less. Accordingly, it is possible to cause, without using a large-scale heat treatment apparatus, the heat-fusible yarn to melt and to be fused with the ground yarn by, for example, performing efficient work with an electric steam iron with 1000W to 1500W, i.e., by moving the steam iron in such a way as to steam the knitted product at desired portions at which the heat-fusible yarn is present.

<Example of heat-fusible yarn that melts at 105°C or less>

[0030] In a preferred embodiment, a nylon heat-fusible yarn having a melting point of 75°C or more and 90°C or less is used for the heat-fusible yarn that melts at 105°C or less.

[0031] For the nylon heat-fusible yarn having a melting point of 75°C or more and 90°C or less, for example, "nylon heat-fusible yarn" (melting point 80°C) made by CHANGZHOU CITY LINGXIAN TEXTILE EQUIPMENT CO., LTD., or "heat-fusible yarn 78T made in Japan" (melting point 85°C) made by Mitsubishi Chemical Corporation may be used.

<Example of method for interweaving heat-fusible yarn>

(1) Case of preventing longitudinal stretching and lateral stretching

[0032] A ground yarn and a heat-fusible yarn are interweaved in the entire part for a plain stitch, a rib stitch, a cardigan stitch, or the like. It is desirable to use pleating in which two different yarns are pulled through a loop at the same time to create stitches. The ground yarn and the heat-fusible yarn are directed to the head of the flat knitting machine from individual yarn insertion holes, and are brought together at the head.

(2) Case of preventing lateral stretching while maintaining longitudinal shrinkage and stretching

[0033] In the stitch diagram of a Milano rib stitch shown in FIG. 1, for example, (1) shows a ground yarn that forms loops with latch needles in front needle beds and latch needles in rear needle beds (a ground yarn for brioche stitch (rib stitch)), (2) shows a ground yarn that forms loops only with latch needles in rear needle beds, and (3) shows a ground yarn that forms loops only with latch needles in front needle beds. Of the yarns shown in (1) to (3), a heat-fusible yarn is arranged parallel to (a heat-fusible yarn is knitted into) the ground yarn shown in (2) and the ground yarn shown in (3).

[0034] Alternatively, in the stitch diagram of a half cardigan stitch shown in FIG. 2, for example, (1) shows a ground yarn for a tuck stitch, and (2) shows a ground yarn for brioche stitch. A heat-fusible yarn is arranged parallel to (a heat-fusible yarn is knitted into) the ground yarn shown in (1).

(3) Case of maintaining shape stability while maintaining shrinkage and stretching of knitted fabric

[0035] In the stitch diagram of a Milano rib stitch shown in FIG. 1, for example, a heat-fusible yarn is arranged parallel to (a heat-fusible yarn is knitted into) the ground yarn for a brioche stitch shown in (1).

[0036] Alternatively, in the stitch diagram of a half cardigan stitch shown in FIG. 2, for example, a heat-fusible yarn is arranged parallel to (a heat-fusible yarn is knitted into) the ground yarn for a brioche stitch shown in (2).

<Specific method for adjusting tension of knitted product>

[0037] The degree of tension (the width of shrinkage and stretching) of the knitted product is adjusted as described below, for example, by changing the method for interweaving a heat-fusible yarn with a ground yarn in a course that is a row of loops arranged in the lateral direction of knitted fabric.

(1) Case of reducing tension to extremely low level

[0038] A ground yarn is knitted together with a heat-fusible yarn in all courses.

(2) Case of decreasing tension

[0039] A ground yarn is knitted together with a heat-fusible yarn in three courses, and only the ground yarn is then knitted in two courses and, thereafter, these procedures are repeated.

(3) Case of obtaining normal tension

[0040] A ground yarn is knitted together with a heat-fusible yarn in one course, and only the ground yarn is then knitted in one course and, thereafter, these procedures are repeated.

(4) Case of increasing tension

[0041] A ground yarn is knitted together with a heat-fusible yarn in two courses, and only the ground yarn is then knitted in three courses and, thereafter, these procedures are repeated.

(5) Case of increasing tension to extremely high level

[0042] A ground yarn is knitted together with a heat-fusible yarn in one course, and only the ground yarn is then knitted in nine courses and, thereafter, these procedures are repeated.

<Evaluation for washing durability>

(Evaluation method)

[0043] Based on the C4M method (washing at 40°C for 6 minutes, rinsing for 2 minutes twice, each spinning for 3 minutes, line dry for drying) in JIS L 1930: 2014 "Textiles-Domestic washing and drying procedures for textile testing", the ratio of dimensional change after washing and drying is calculated as $[(\text{length after treatment}) - (\text{length before treatment})] / (\text{length before treatment})$.

(Evaluation target)

[0044] A sweater (100% cotton with a yarn count of 2/100 being used as a ground yarn) with a Milano rib stitch is used as the evaluation target.

(Example and Comparison Example)

[0045] As Example, the sweater was produced with use of a flat knitting machine by arranging "heat-fusible yarn 78T made in Japan" (melting point 85°C) with 50 deniers made by Mitsubishi Chemical Corporation parallel only to a ground yarn for a brioche stitch (1 × 1 rib) shown in (1) in the stitch diagram of a Milano rib stitch shown in FIG. 1, and the heat-fusible yarn was melted by a steam iron to be fused with the ground yarn. The sweater including no heat-fusible yarn was used as Comparison Example.

(Evaluation result)

[0046] Washing and drying were performed once according to the washing and drying procedures for testing in the evaluation method, and the washing and drying were repeated five times. Thereafter, the ratios of dimensional change of body length, body width, sleeve length, and hem width were calculated, the results of which are shown in Table 1. Positive numerical values indicate "stretching", and negative numerical values indicate "shrinkage".

[Table 1]

Test method JIS L 1930 C4M method (Line dry)	Evaluation target product	Sweater			
		Example		Comparison Example	
	Number of times of repetition	Once	Five times	Once	Five times
Ratio of dimensional change (%)	Body length	-1.7	-3.7	-3.0	-6.3
	Body width	-1.6	-2.7	-0.6	-1.3
	Sleeve length	-1.7	-3.3	-0.4	1.1
	Hem width	-1.7	-2.1	1.7	1.7

[0047] Regarding Comparison Example, after the washing and drying were performed once on the sweater, the body length, the body width, and the sleeve length decreased, whereas the hem width increased. After the washing and drying were performed on the sweater of Comparison Example five times, the body length and the body width decreased, whereas the sleeve length and the hem width increased. In the sweater of Comparison Example on which the washing and drying were performed five times, the amount of shrinkage in body length is large, that is, 6.3%.

[0048] In contrast, regarding Example, in both of a case where the washing and drying were performed once on the sweater and a case where the washing and drying were performed on the sweater five times, the body length, the body width, the sleeve length, and the hem width decreased.

[0049] In the sweater of Example on which the washing and drying were performed once, the amount of shrinkage in body length shows the largest amount of shrinkage, that is, 1.7%. This amount of shrinkage in body length (1.7%) is approximately 57% of the amount of shrinkage in body length (3.0%) of the sweater of Comparison Example on which the washing and drying were performed once. In the sweater of Example on which the washing and drying were performed five times, the amount of shrinkage in body length shows the largest amount of shrinkage, that is, 3.7%. This amount of shrinkage in body length (3.7%) is approximately 59% of the amount of shrinkage in body length (6.3%) of the sweater of Comparison Example on which the washing and drying were performed five times.

[0050] As described above, it can be understood that the sweater of Example has extremely higher shape stability after repeated washing and drying, and has a significantly lower maximum amount of shrinkage compared with the sweater of Comparison Example.

<Manner of operation and advantageous effects>

[0051] The knitted product according to the embodiment of the present invention described above includes a natural fiber yarn and/or a synthetic fiber yarn. The heat-fusible yarn is fused with the whole or a part of the ground yarn that is the natural fiber yarn and/or the synthetic fiber yarn. Accordingly, it is possible to prevent shrinkage and stretching of the ground yarn.

[0052] A knitted product including the heat-fusible yarn in an unmelted state is produced by form-knitting with use of, for example, a flat knitting machine while knitting the heat-fusible yarn into the whole or a part of the ground yarn, thereby reducing the amount of usage of yarn and cutting loss, and also efficiently producing the knitted product including the heat-fusible yarn in an unmelted state.

[0053] The heat-fusible yarn melts at 105°C or less. Accordingly, it is possible to cause, without using a large-scale heat treatment apparatus, the heat-fusible yarn to melt and to be fused with the ground yarn by performing efficient work with a steam iron, i.e., by moving the steam iron in such a way as to steam the knitted product at desired portions at which the heat-fusible yarn is present. Therefore, there is no possibility of compromising the feel of the knitted product, and it is possible to achieve small lot and short cycle production that is suited to individualized and diversified needs of consumers.

[0054] All of the above descriptions of the embodiment are merely illustrative, and the present invention is not limited to the above. Various modifications and variations can be made without departing from the scope of the present invention.

Claims

1. A knitted product in which a natural fiber yarn and/or a synthetic fiber yarn is used, the knitted product comprising:
a heat-fusible yarn fused with a whole or a part of a ground yarn, the heat-fusible yarn melting at 105°C or less.
2. The knitted product according to claim 1, wherein the knitted product is formed by a flat knitting machine.
3. The knitted product according to claim 1 or 2, wherein the heat-fusible yarn is a nylon heat-fusible yarn having a melting point of 75°C or more and 90°C or less.
4. The knitted product according to claim 1, wherein fineness of the heat-fusible yarn is 30 deniers or more and 150 deniers or less.
5. A method for producing a knitted product, the method comprising:
a first step in which, while a heat-fusible yarn that melts at 105°C or less is knitted into a whole or a part of a ground yarn that is a natural fiber yarn and/or a synthetic fiber yarn, a knitted product including the heat-fusible yarn in an unmelted state is produced by a flat knitting machine; and
a second step in which the heat-fusible yarn in the knitted product that has undergone the first step is melted by a steam iron to cause the heat-fusible yarn to be fused with the ground yarn.
6. The method for producing a knitted product according to claim 5, wherein the heat-fusible yarn is a nylon heat-fusible yarn having a melting point of 75°C or more and 90°C or less.

FIG. 1


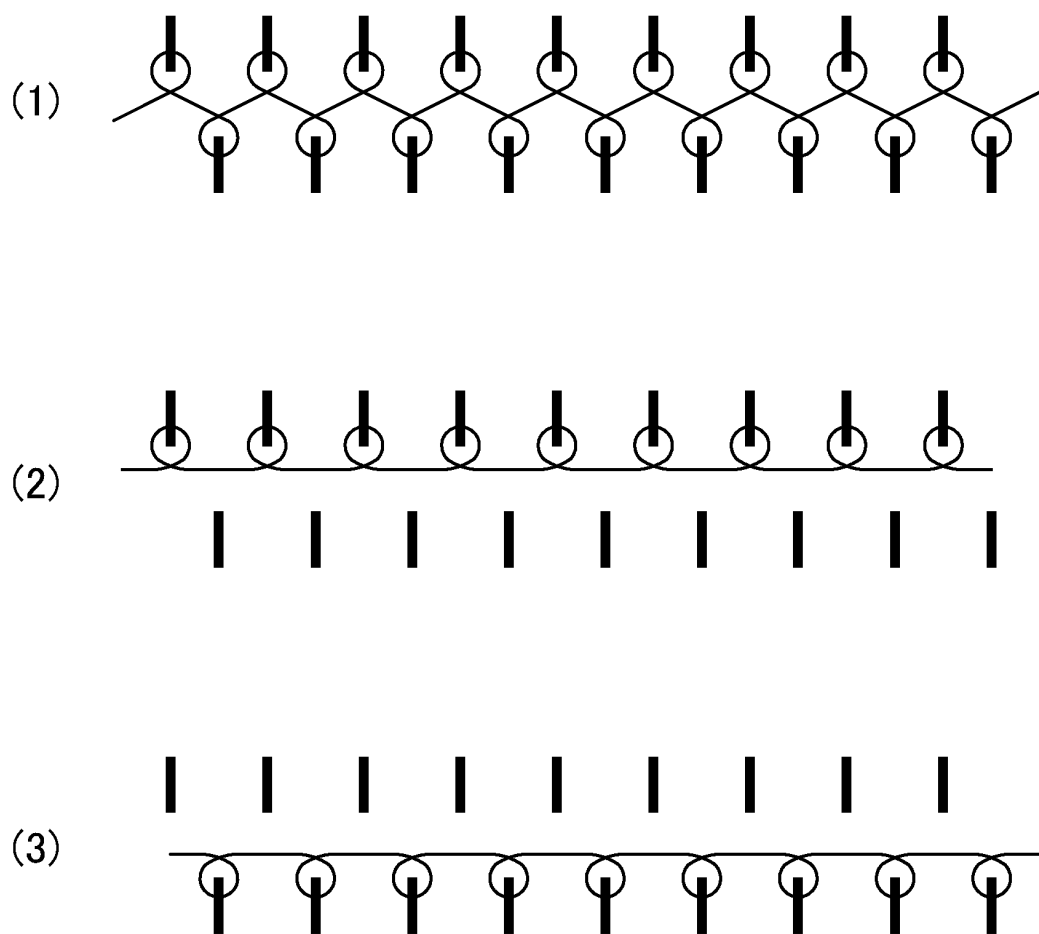


FIG. 2

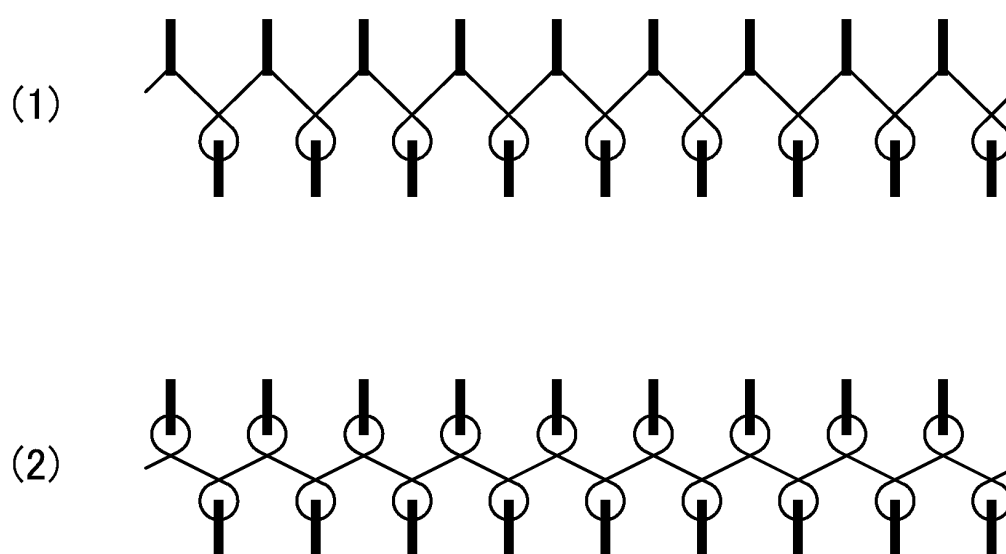

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2023/018819

A. CLASSIFICATION OF SUBJECT MATTER

D04B 1/14(2006.01)i; **D06C 7/02**(2006.01)i; **A41D 31/00**(2019.01)i; **A41D 31/04**(2019.01)i
FI: D04B1/14; A41D31/00 503Z; A41D31/04 F; D06C7/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

D04B1/14; D06C7/02; A41D31/00; A41D31/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Published examined utility model applications of Japan 1922-1996
Published unexamined utility model applications of Japan 1971-2023
Registered utility model specifications of Japan 1996-2023
Published registered utility model applications of Japan 1994-2023

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 10-096144 A (ARACO CORP.) 14 April 1998 (1998-04-14) claim 1, paragraphs [0006], [0009], [0010], [0014], [0019]	1-2, 4
Y	claim 1, paragraphs [0006], [0009], [0010], [0014], [0019]	3, 5-6
Y	JP 2004-149971 A (UNITICA FIBERS LTD.) 27 May 2004 (2004-05-27) claim 1, paragraphs [0006], [0013], [0031]	3, 6
A	claim 1, paragraphs [0006], [0013], [0031]	1-2, 4-5
Y	WO 2011/040359 A1 (NISSHINBO TEXTILE INC.) 07 April 2011 (2011-04-07) paragraph [0031]	5-6
A	paragraph [0031]	1-4
Y	JP 2022-007889 A (KOMATSU MATERE CO., LTD.) 13 January 2022 (2022-01-13) claim 1, paragraph [0067]	5-6
A	claim 1, paragraph [0067]	1-4

☐ Further documents are listed in the continuation of Box C.
☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 24 July 2023	Date of mailing of the international search report 01 August 2023
Name and mailing address of the ISA/JP Japan Patent Office (ISA/JP) 3-4-3 Kasumigaseki, Chiyoda-ku, Tokyo 100-8915 Japan	Authorized officer Telephone No.

Form PCT/ISA/210 (second sheet) (January 2015)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/JP2023/018819

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
JP 10-096144 A	14 April 1998	(Family: none)	
JP 2004-149971 A	27 May 2004	(Family: none)	
WO 2011/040359 A1	07 April 2011	US 2012/0190260 A1 paragraph [0038] EP 2484822 A1 CN 102549206 A	
JP 2022-007889 A	13 January 2022	(Family: none)	

Form PCT/ISA/210 (patent family annex) (January 2015)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 5688240 B [0004]