

(19)



(11)

EP 4 556 396 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

21.05.2025 Bulletin 2025/21

(51) International Patent Classification (IPC):

B65D 47/04 ^(2006.01) **A47K 5/122** ^(2006.01)

B65D 47/20 ^(2006.01) **B65D 51/24** ^(2006.01)

B65D 47/24 ^(2006.01)

(21) Application number: **24183154.4**

(22) Date of filing: **19.06.2024**

(52) Cooperative Patent Classification (CPC):

B65D 47/043; B65D 47/2031; B65D 47/249

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC ME MK MT NL
NO PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA

Designated Validation States:

GE KH MA MD TN

(30) Priority: **17.11.2023 EP 23210498**

14.05.2024 EP 24175572

(71) Applicant: **The Procter & Gamble Company**

Cincinnati, OH 45202 (US)

(72) Inventors:

• **DAGNELIE, Thierry Christian Francis**
1853 Strombeek-Bever (BE)

• **ROMERO GUEVARA, Ana Lucia**
1853 Strombeek-Bever (BE)

• **TOELEN, Cedric Daniel Junior**
1853 Strombeek-Bever (BE)

• **DE WILDE, Vincent Hubert Monique**
1853 Strombeek-Bever (BE)

(74) Representative: **P&G Patent Belgium UK**

N.V. Procter & Gamble Services Company S.A.
Temselaan 100


1853 Strombeek-Bever (BE)

(54) **A LIQUID DISPENSER FOR AN INVERTED CONTAINER**

(57) An impact resistance system (30) for a dispenser comprising a wall (60) which is higher than an opening

(33a) that allows ingress of a liquid into the impact resistance system (30).

Fig. 12

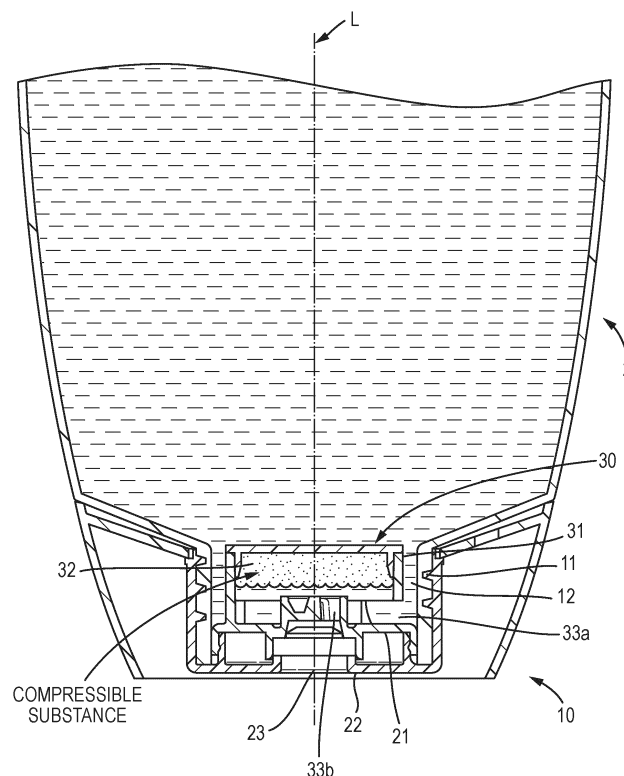

EP 4 556 396 A1

Description

FIELD OF THE INVENTION

- 5 **[0001]** The present invention relates to a liquid dispenser for dispensing liquid from an inverted container, and inverted containers comprising them, in particular, liquid dispensers for dosing viscous liquids.

BACKGROUND OF THE INVENTION

- 10 **[0002]** Liquid dispensers designed for use with viscous liquids are well-known in the field of cleaning products, especially for liquid laundry detergent compositions. These dispensers typically consist of containers with a spout positioned at the top, commonly referred to as "top-dispensing bottles." To dispense the liquid, consumers typically need to open a cap, expose the spout, and then invert and squeeze the bottle. However, these top-dispensing bottles have several issues. Firstly, the liquid tends to flow out upon inversion, even without squeezing, making it challenging to control
15 the amount of liquid dispensed and leading to potential spillage when the bottle is returned to an upright position. Secondly, these bottles often leave liquid residue around the spout, which can dry and form a crust, eventually obstructing the spout. Additionally, the poor ergonomic design of these bottles can cause inconvenience and discomfort, particularly for elderly consumers or when using larger-sized bottles.

- [0003]** To address these issues, inverted containers have gained popularity among consumers. Inverted containers
20 have an orifice at the bottom for liquid dispensing and are used in an upside-down position, resting on their bottom when placed on a horizontal surface. These containers typically feature a flexible bottle with the orifice positioned bottom surface of the container, and some improvements include the incorporation of a resilient valve in the discharge orifice. Such valves aim to control the volume of liquid dispensed and minimize leakage, ensuring that liquid does not escape unless force is applied to the container. However, leakage remains an issue, even for such bottom-dispensing containers that comprise a
25 cap covering the orifice.

- [0004]** A particular challenge with these types of inverted containers is the prevention of leakage of the liquid contained therein during steady state (i.e., storage) and/or upon impact, especially upon impact. For example, leakage may occur during storage when the inverted container is subjected to a temperature change, specifically increase (e.g., inverted container placed beside sunny window or near stove top, etc.), that can lead to internal pressure increases and leakage.
30 Specifically, by "impact" it is meant that when the inverted container is handled, transported, dropped or knocked over. As a result of the impact, transient liquid pressure increases, also referred to as hydraulic hammer pressure, inside the container and can momentarily force open the valve causing liquid to leak out, which will result in consumer dissatisfaction with the product. Previous attempts to overcome the leakage problem have involved including a closing cap (see for example CN2784322U (Liu Zhonghai) & WO2014/130079 (Dow Global Technologies)). However, inclusion of a closing
35 cap means additional steps of having to open the closing cap for dosing and reclose the closing cap after the dosing process, which is undesirable to consumers. Furthermore, the cap does not avoid liquid messiness and dried up crust of liquid around the spout/cap. Other attempts have incorporated baffles on top of the resilient valve (see for example JP2007/176594 (Lion), & WO2000/68038 (Aptar Group)), which have not completely resolved the leakage issue particularly as it pertains to inverted containers, more particularly upon impact. JPH02127252A seeks to prevent liquid
40 from leaking by providing a liquid path for discharging liquid from a device on a body, wherein a passage part having a first opening opened at an opening end and a second opening located above the opening end are included so that liquid is guided upward from the opening end at a mouth part. The need for improved liquid dispensers for an inverted container which substantially reduces or prevents the tendency of the valve to open when the inverted container is impacted, particularly dropped or knocked over has been met through the use of dispensers as described in EP3492400B1 and
45 EP3511402B1. However, it remains challenging to dose accurate quantities of the liquid composition, contained within the inverted container, especially for small dose sizes. EP24175572.7 discloses a liquid dispenser and inverted container that provides for improved dosing of liquid compositions, especially at low dosage volumes, while being more resistant to leakage, even for low viscosity liquids. However, when dispensing more viscous liquid compositions, such dispensers can require a greater pressure to be exerted by the user onto the container, in order to dispense the liquid composition contained therein. While the valve contained within the dispenser typically has an opening pressure, above which, the
50 liquid is dispensed, viscous liquids result in a larger pressure difference being required in order for the viscous liquid to pass through the liquid dispenser itself. This can further result in less control of the dosing, including spurting of the composition upon dosing.

- [0005]** Therefore, there is a continued need for liquid dispensers specifically designed for viscous liquids, which not only
55 provide improved dosing accuracy, particularly for small doses, but also offer enhanced leak prevention, while not requiring excessive manual pressure to dose the liquid composition.

SUMMARY OF THE INVENTION

[0006] The present invention relates to a liquid dispenser for affixing to an inverted container containing dispensable liquid, the dispenser comprising: a body of the dispenser comprising a connecting sleeve, wherein the connecting sleeve is adaptable for engaging to an exterior surface proximate an opening of the inverted container and is spaced radially inwardly to define an internal discharge conduit for establishing fluid communication with the liquid contained in the inverted container; a valve localized in the body extending across the internal discharge conduit, the valve having an interior side for being contacted by the liquid contained inside the inverted container and an exterior side for being exposed to the exterior atmosphere, wherein the valve defines a dispensing orifice that is reactably openable when the pressure on the valve interior side exceeds the pressure on the valve exterior side; and an impact resistance system localized upstream of the valve, the system comprises: a housing having a cavity therein and extending longitudinally from the body and radially inwardly from the sleeve; and a wall positioned radially inwardly from the housing, extending longitudinally from the body, and extending around the valve, wherein the housing comprises at least one inlet opening that provides a flow path for the liquid from the inverted container into the housing, and at least one outlet opening that provides a path of egress for the liquid from the housing to the exterior atmosphere when the dispensing orifice is opened, wherein the cavity is adapted to be partially occupied by a compressible substance, wherein the at least one inlet opening is proximal to the body, wherein the at least one inlet opening has an inlet opening height, wherein the wall extends longitudinally from the body an overlap distance further than the lower edge (38), wherein the ratio of the overlap distance (O) to the inlet opening height (H) is 1.0 or higher, and the ratio of the diameter of the housing internal surface (35) to the diameter of the wall outer surface (36) is at least 1.5:1.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] While the specification concludes with claims particularly pointing out and distinctly claiming the invention, it is believed that the invention will be better understood from the following description of the accompanying figures wherein like numerals are employed to designate like parts throughout the same:

Figure 1 shows a perspective view of a liquid dispenser (1) according to one aspect of the present invention connected to an inverted container (2), the container comprising sidewalls (3). Also shown is section line 9-9.

Figure 2 shows a perspective view of a liquid dispenser (1) according to one aspect of the present invention, comprising the body (10) and the impact resistance system (30).

Figure 3 shows a perspective view of a body (10) of use in the liquid dispenser (1) according to the present invention, before the impact resistance system (30) has been incorporated. Also shown are the connecting sleeve (11), the internal discharge conduit (12), the exterior portion (14) and the central portion (15) of the body (10), as well as the top end (A) and bottom end (B).

Figure 4 shows a top view of the interior side (21) of a valve (20) of use in the liquid dispenser (1) according to the present invention. Also shown are the dispensing orifice (23), as well as the components of the dispensing orifice: the flexible central portion (24), the slits (25), distal ends (26) of the slits (25) and the flaps (27) formed by the slits (25).

Figure 5 shows a plan side view of the valve (20) of FIG. 4, further showing the outer edge (28b) of the marginal flange of the valve (20).

Figure 6 is a section view of the valve (20) of FIG. 4, further showing the valve exterior side (22), in addition to the inner edge (28a), the outer edge (28b), the bottom (28c), and the top (28d) with the outer rim (28e) of the marginal flange (28).

Figure 7 shows a perspective view of an impact resistance system (30) of use in the liquid dispenser (1) according to the present invention. Also shown is the housing (31), the inlet openings (33a) and the position of the outlet opening (33b).

Figure 8 shows an angled cross-sectional view of the impact resistance system (30) of FIG. 7. Also shown is the valve (20), the cavity (32), the housing internal surface (35), the wall (60), and the wall outer surface (36).

Figure 9 shows a cross-sectional view of the impact resistance system (30) of FIG. 7, connected to a body (10). Also shown are the upper retainer surface (29a) and lower retainer surface (29b) for securing the valve (20). Also shown is the graphical representation of the inlet opening height (H) and the overlap distance (O).

Figure 10 shows a cross-sectional view of the impact resistance system (30) similar to that of FIG. 7, but further comprising a baffle (40).

Figure 11 shows an angled cross-sectional view of the impact resistance system (30) of figure 10, showing the baffle (40) in perspective view, as well as its occlusion member (41) supported by support members (42).

Figure 12 shows a cross sectional view of the liquid dispenser (1) of Figure 1 taken along section line 9-9, including the impact resistance system (30) of Fig 10, and in which the valve defines the dispensing orifice (23).

Figure 13 shows a drop tester apparatus and the procedures in the Leakage Resistance Test.

DETAILED DESCRIPTION OF THE INVENTION

[0008] The present invention provides a liquid dispenser as described herein which can substantially reduce or prevent the tendency of the valve to open when the inverted container is impacted, particularly dropped or knocked over, so that the liquid does not leak out, while also providing more accurate dosing, especially at low dose sizes, and improved leakage prevention for liquids having a higher viscosity, without requiring excessive manual pressure to be applied to the container to dose the liquid contained therein.

[0009] Another aim of the present invention is to provide a liquid dispenser as described herein which prevents steady state leakage of the liquid. It is advantageous that the valve remains closed during storage of the inverted container so that the liquid does not leak out unless force is intentionally applied to the inverted container to dispense the liquid. This avoids messy dried liquid forming near the dispensing orifice, which can potentially block the liquid from being dispensed, or messiness in the storage area leading to eventual surface damage when stored on delicate surfaces. The sensitivity to leakage is especially reduced under static storage conditions when storing low viscosity liquids.

[0010] A further aim of the present invention is to provide a liquid dispenser as described herein that allows for ease and accurate dosing without needing to turn the containers over. This is believed to contribute to faster and improved ergonomical dosing experience (i.e., more comfortable, less stress on the wrist, less strength needed, etc.). For example, less steps are required than with conventional top-up bottles or upside-down containers that may include a closing cap or seal, and no awkward twisting motion of the hands is needed to invert the bottle upside down to dispense the liquid.

[0011] Yet a further aim of the present invention is to provide a liquid dispenser as described herein that would allow access to every last drop of the liquid inside the inverted containers. Thus, it is an advantage of the invention to minimize waste.

[0012] The present invention also has the advantage of allowing for a larger formulation window of operable viscosity since formulators can now include liquids having a larger viscosity range, particularly liquids having lower viscosities which tend to be more sensitive to leakage.

[0013] Another advantage of the present invention is that it allows for use with larger sized containers (e.g., greater than 450 mL). It is expected that the improved liquid dispenser enables higher weight tolerances on the resilient valve thereby substantially reducing/preventing liquid leakage when used with larger inverted containers.

[0014] These and other features, aspects and advantages of the present invention will become evident to those skilled in the art from the detailed description which follows.

[0015] It is to be understood that the scope of the claims is not limited to the specific devices, apparatuses, methods, conditions or parameters described and/or shown herein, and that the terminology used herein is for the purpose of describing particular aspects of the invention by way of examples only and is not intended to be limiting of the claimed invention.

[0016] As used herein, articles such as "a" and "an" when used in a claim, are understood to mean one or more of what is claimed or described.

[0017] As used herein, any of the terms "comprising", "having", "containing", and "including" means that other steps, ingredients, elements, etc. which do not adversely affect the end result can be added. Each of these terms encompasses the terms "consisting of" and "consisting essentially of". Unless otherwise specifically stated, the elements and/or equipment herein are believed to be widely available from multiple suppliers and sources around the world.

[0018] As used herein, the term "compressible" means the ability of a substance to reduce volume under influence of increased pressure, in which the volume reduction is at least 1%, preferably at least 5%, most preferably at least 10%.

[0019] As used herein, the term "consumers" is meant to include the customers who purchase the product as well as the person who uses the product.

[0020] As used herein, the term "hydraulic hammer pressure" means a transient pressure increase caused when the liquid inside the inverted container is forced to stop or change direction suddenly (i.e., momentum change) typically as a result of impact to the inverted container. Hydraulic hammer pressure can also be referred to as "impact force". If the hydraulic hammer pressure is not somehow absorbed by the liquid dispenser, then the force might (momentarily) open the valve and cause leakage of the liquid.

[0021] The terms "include", "includes" and "including" are meant to be non-limiting.

[0022] As used herein, the term "liquid" means any liquid including highly viscous materials (e.g., lotions and creams), suspensions, mixtures, etc. For example, a "liquid" may constitute a personal care product, a food product (e.g., ketchup, mayonnaise, mustard, honey, etc.), an industrial or household cleaning product (e.g., laundry detergent, dish washing cleaning detergent, etc.), or other compositions of matter (e.g., compositions for use in activities involving manufacturing, commercial or household maintenance, personal/beauty care, baby care, medical treatment, etc.). Key targeted liquid is a hand dishwashing liquid detergent. The liquid product preferably the liquid detergent product, more preferably the liquid hand dishwashing product may have any density, however the liquid preferably has a density between 0.5 g/mL and 2 g/mL, more preferably between 0.8 g/mL and 1.5 g/mL, most preferably between 1 g/mL and 1.2 g/mL.

[0023] As used herein, the term "steady state" means the constant pressure properties of the liquid inside the container

when it is at rest.

[0024] The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as "1.2cm" is intended to mean "about 1.2cm".

[0025] It is understood that the test methods that are disclosed in the Test Methods Section of the present application must be used to determine the respective values of the parameters of Applicants' inventions as described and claimed herein.

[0026] In all embodiments of the present invention, all percentages are by weight of the total composition, as evident by the context, unless specifically stated otherwise. All ratios are weight ratios, unless specifically stated otherwise, and all measurements are made at 25°C, unless otherwise designated.

Liquid Dispenser

[0027] For ease of description, the liquid dispenser (1) of this invention is described with terms such as upper/ top, lower/ bottom, horizontal, etc. in reference to the position shown in Figure 1. With continued reference to Figures 1 and 12, it will be understood however, that the liquid dispenser (1) of the invention is used with an inverted container (2) wherein the liquid is dispensed from the bottom of the inverted container (2). The liquid dispenser (1) can be affixed, preferably releasably affixed, to an inverted container (2). As such, the liquid dispenser (1) preferably comprises a means of affixing to an inverted container, such as a screw thread (as shown in Figures 9 and 12), or one half of a lock-and-key mechanism, or surfaces adapted for gluing or heat-sealing.

[0028] The liquid dispenser (1), or at least certain components of the dispenser (1), can be made from any materials which can be molded or shaped, while still being durable enough to hold up to being transported and regular wear and tear with constant exposure to a liquid. The dispenser (1) components may be separately molded and may be molded from different materials. The materials for the different components, unless specifically specified, may have the same or different colors and textures for aesthetic purposes. Preferably, the components are molded from a hard plastic, more preferably a thermoplastic material, such as for example, polypropylene (PP), polycarbonate, polyethylene (PE), polyvinylchloride (PVC) or the like. One or more of the components of the liquid dispenser may also partially or fully comprise post-consumer recycled materials from bottles, other containers and the like. As shown in Figure 2, the liquid dispenser (1) comprises three basic components, a body (10), a valve (20) (not shown) and an impact resistance system (30). Preferably the liquid dispenser (1) is free of a closing cap or seal. Typically the seal is included for transport and is removed and discarded after the first use of the liquid dispenser (1).

Body

[0029] As shown in Figure 3, the liquid dispenser (1) comprises a body (10). The body (10) includes at a top end (A) a connecting sleeve (11) adapted for releasably engaging to an exterior surface proximate an opening (5) (not shown) of the inverted container (2). Preferably this arrangement provides leak-tight contact between the liquid dispenser (1) and the inverted container (2) making the liquid dispenser (1) sealingly tight against leakage. Alternatively, the connecting sleeve (11) may be adapted for releasably engaging to an interior surface proximate an opening (5) (not shown) of the inverted container (2). In other words, the inverted container (2) is attached to the connecting sleeve (11) located on the horizontal exterior of the body (10) of the liquid dispenser. However this alternative arrangement is less preferred since there is a higher leakage risk of liquid passing through the contacts between the dispenser (1) and the inverted container (2).

[0030] The body (10) can be releasably engaged to the opening (5) (not shown) of the inverted container (2) by suitable means of attachment commonly known to those skilled in the art, including for non-limiting example co-operative threads, crimping, clipping means, clasp-means, snap-fit means, groove arrangements, bayonet fittings, or permanently welded. Preferably, the male thread on the exterior surface of the opening (5) (not shown) of the inverted container (2) is screwed on the female thread which has been molded onto the connecting sleeve (11) (as illustrated in Figure 3).

[0031] The body (10) includes a central portion (15) axially disposed along the longitudinal axis (L). The connecting sleeve (11) is spaced radially inwardly towards the central portion (15) and defines an internal discharge conduit (12). The discharge conduit (12) functions as a flow passage for establishing fluid communication with the liquid contained in the inverted container (2) to the exterior atmosphere. It will be understood that in use, the connecting sleeve (11) forms a fluid seal between the liquid dispenser (1) and the inverted container (2) so that the liquid can enter the liquid dispenser (1) without leaking.

[0032] Preferably, the body (10) comprises at a bottom end (B) an exterior portion (14) adapted to allow the inverted container (2) to stably rest on its bottom on a flat surface (as shown in Figure 1). The exterior portion (14) may be integrally formed with the body (10). For example, the exterior portion (14) comprises an annular flange structure (e.g., skirt) that extends axially downward towards the bottom (B) and radially outward as shown in Figure 3. While Figure 3 depicts the

exterior portion (14) of the body (10) as having a frustoconical shape, it is not necessarily limited to this shape. Other shapes such as cylindrical, pyramid shape, disk shape, multiple legs, etc. could be used so long as they allow for the inverted container (2) to remain stably rested on its bottom.

[0033] It should be understood that while the body (10) has been shown and described herein, there are many variations that may be desirable depending on the particular requirements. For example, while the connecting sleeve (11) and the exterior portion (14) have been shown as having uniform material thickness, in some applications it may be desirable for the material thickness to vary. By way of further example, while a number of surfaces have been described herein as having a specific shape (e.g., frustoconical, planar, etc.) other specific shapes may be desirable for those surfaces depending upon the particular application.

Valve

[0034] The liquid dispenser (1) further comprises a valve (20) localized in the body (10) extending across the internal discharge conduit (12). As shown by Figures 4 to 6, the valve (20) has an interior side (21) for being contacted by the liquid contained inside the inverted container (2) and an exterior side (22) (as shown in Figure 6) for being exposed to the exterior atmosphere. The valve (20) defines a dispensing orifice (23) that is reactably openable when the pressure on the valve interior side (21) exceeds the pressure on the valve exterior side (22).

[0035] The valve (20) is preferably a flexible, elastomeric, resilient, 2-way bi-directional, self-closing, slit-type valve mounted in the body (10). The valve (20) has slit or slits (25) which define the dispensing orifice (23). For example, the dispensing orifice (23) may be formed from one slit (25) or two or more intersecting slits (25), that may open to permit dispensing of liquid therethrough in response to an increased pressure inside the inverted container (2), such as for example, when the inverted container (2) is squeezed. The valve (20) is typically designed so as to reactably close the dispensing orifice (23) and stop the flow of liquid therethrough upon a reduction of the pressure differential across the valve (20). The amount of pressure needed to keep the valve (20) in the closed position will partially depend on the internal resistance force of the valve (20). The "internal resistance force" (*i.e.*, cracking-pressure) refers to a pre-determined resistance threshold to deformation/opening of the valve (20). In other words, the valve (20) will not tend to resist deformation/opening so that it remains closed under pressure of the steady state liquid bearing against the interior side (21) of the valve (20). The amount of pressure needed to deform/open the valve must overcome this internal resistance force. This internal resistance force must not be too low so as to cause liquid leakage or too high to make dispensing a dose of liquid difficult. Accordingly, the valve (20) preferably has an internal resistance force of the valve (20) that is at least 10 mbar, preferably at least 25 mbar, more preferably less than 250 mbar, even more preferably less than 150 mbar, most preferably less than 75 mbar. Preferably, the dispensing orifice (23) is designed to be in the open position when a pressure difference (Δ) of at least 10 mbar, preferably at least 25 mbar exists between the valve interior side (21) in relation to the valve on the exterior side (22). Preferably the force exerted on the valve interior side (21) that is required in order to open the dispensing orifice (23) is at least 10 mbar, preferably at least 25 mbar. Preferably the valve (20) has a surface area of between 0.1 cm² and 10 cm², more preferably between 0.3 cm² and 5 cm², most preferably between 0.5 cm² and 2 cm². Preferably the valve (20) has a height of between 1 mm and 10 mm, more preferably between 2 mm and 5 mm. Other dimensions could be used so long as they allow for the dispensing orifice (23) to remain in the fully closed position at rest.

[0036] As shown in Figures 4 to 6, the valve (20) preferably includes a flexible central portion (24) having at least one, preferably at least two, alternatively a plurality (*i.e.*, three or more), of planar, self-sealing, slits (25) which extend radially outward towards distal ends (26). It should be understood that slit valve is intended to refer to any valve that has one or more slits in its final functioning form, including such valve wherein one or more of the slits, is/are only fully completed after the valve has been formed and/or installed in the liquid dispenser (1). Each slit (25) preferably terminates just before reaching the distal end (26) in the valve (20). Preferably, the slits (25) are straight (as shown in Figure 4) or may have various different shapes, sized and/or configurations (not shown). Preferably, the intersecting slits (25) are equally spaced from each other and equal in length.

[0037] The valve (20) is typically designed to close the internal discharge conduit (12) and stop the flow of liquid through the conduit (12) upon a reduction of the pressure differential across the valve (20). The amount of pressure needed to open the valve (20) will partially depend on the internal resistance force of the valve (20). The "internal resistance force" (*i.e.*, cracking-pressure) refers to a pre-determined resistance threshold to deformation/opening of the valve (20). In other words, the valve (20) will tend to resist deformation/opening so that it remains closed under pressure of the steady state liquid bearing against the interior side (21) of the valve (20). The amount of pressure needed to deform/open the valve (20) must overcome this internal resistance force. This internal resistance force should not be so low as to cause liquid leakage. Accordingly, the valve (20) preferably has an opening pressure differential from the interior side (21) to the exterior side (22) of the valve (20) of at least 10 mbar, preferably at least 15 mbar, more preferably at least 25 mbar, measured at 20 °C. The internal resistance force should not be so high as to make dispensing a dose of liquid difficult.

[0038] Especially where the inverted container (2) comprises a low viscosity liquid, the use of a valve (20) which opens at a relatively low-pressure differential helps to avoid spurting of the composition through the valve (20). The valve (20)

preferably opens at a pressure differential of from 10 to 250 mbar, preferably from 15 to 150 mbar, more preferably from 25 to 75 mbar, measured at 20 °C.

[0039] Moreover, the use of a valve (20) which opens at such low-pressure differentials also means that a smaller pressure differential is required to draw air through the valve (20) once the squeezing has been removed, so that the container (2) can return to its original shape. This is particularly important for inverted containers (2) which comprise a more elastic container (2) since an insufficient pressure differential across the valve (20) means that not enough air is drawn through the valve (20) and into the container (2) for the container (2) to revert back to its undeformed shape.

[0040] The opening pressure differential (in mbar) is typically measured using a water column, to which the slit-valve has been sealingly attached to the bottom of the water-column, then measuring the water-height required to open the slit valve, at the target temperature. The opening pressure is typically available from the valve manufacture, including on technical literature provided for the valve.

[0041] With continued reference to Figure 4, the intersecting slits (25) define four, generally sector-shaped, equally sized flaps (27) in the valve (20). The flaps (27) may be characterized as the openable portions of the valve (20) that reacts to pressure differences to change configuration between a closed, rest position (as shown in Figure 4) and an open position. The valve (20) is designed to be flexible enough to accommodate in-venting of exterior atmosphere. For example, as the valve (20) closes, the closing flaps (27) or openable portions can continue moving inwardly and pass the closed position to allow the valve flaps (27) to open inwardly when the pressure on the valve exterior side (22) exceeds the pressure on the valve interior side (21) by a predetermined magnitude. Such in-venting capability of the exterior atmosphere helps equalize the interior pressure inside the inverted container (2) with the pressure of the exterior atmosphere. It is understood that the valve (20) is designed so that the opening pressure to vent air back into the inverted container (2) is low enough to avoid paneling of the inverted container (2) during use. In other words, the resilience of the inverted container (2) to return to its initial shape after use (i.e., squeezing force) is higher than the venting opening pressure.

[0042] Preferably the valve (20) is not contacting the surface on which the inverted container (2) is standing when at rest, nor contacting the surface to be cleaned upon dosing. Heretofore the valve (20) is augmented into the body (10), preferably being positioned at least 1 mm from the resting surface, more preferably at least 5 mm, even more preferably at least 1 cm. By positioning the valve (20) above rather than in contact with the surface there is less risk of capillary seeping through the valve (20) leading to surface contamination and potentially surface damage upon storage of the inverted container (2).

[0043] The valve (20) is preferably molded as a unitary structure from materials which are flexible, pliable, elastic and resilient. Suitable materials include, such as for example, thermosetting polymers, including silicone rubber (available as D.C. 99-595-HC from Dow Corning Corp., USA; WACKER 3003-40 Silicone Rubber Material from Wacker Silicone Co.) preferably having a hardness ration of 40 Shore A, linear low-density polyethylene (LLDPE), low density polyethylene (LDPE), LLDPE/LDPE blends, acetate, acetal, ultra-high-molecular weight polyethylene (UHMW), polyester, urethane, ethylene-vinyl-acetate (EVA), polypropylene, high density polyethylene or thermoplastic elastomer (TPE). The valve (20) can also be formed from other materials such as thermoplastic propylene, ethylene and styrene, including their halogenated counterparts. Suitable valves are commercially available such as from the APTAR Company including the SimpliSqueeze® valve line up.

[0044] As shown in Figures 8 to 11, the valve (20) can be localized in the body (10) or impact resistance system (30) to provide the dispensing orifice (23). As shown in Figures 9 and 10, the valve (20) is preferably localized in the body (10), below the outlet opening (33b) and provides the path of egress for the liquid from the housing (31) to the exterior atmosphere when the dispensing orifice (23) is opened.

[0045] As shown in figures 4 to 6, the valve (20) typically includes a marginal flange (28) which seals about the dispensing orifice (23), in addition to the central portion (24). The marginal flange (28) typically has an annular plan shape and a substantially L-shaped cross-sectional configuration, comprising an inner edge (28a), an outer edge (28b), a bottom (28c), and a top (28d) with an outer rim (28e) upstanding therefrom. The marginal valve flange (28) has substantial thickness between the bottom (28c) and top (28d) which is resiliently compressed between an upper retainer surface (29a) and a lower retainer surface (29b) to form a secure leak-resistant seal therebetween (see Figures 9 and 12). If present, the outer rim portion (28e) of marginal flange (28) positively locks the valve (20) to prevent any radial movement.

[0046] As shown in Figures 9 and 10, the lower retainer surface (29b) can be formed as part of the body (10) or housing (31), preferably the body (10). The upper retainer surface (29a) is fixedly mounted to, or forms part of the body (10) or housing (31), preferably the housing (31).

[0047] The valve (20) is normally in the closed position and can withstand the pressure of the liquid inside the inverted container (2) so that the liquid will not leak out unless the inverted container (2) is squeezed. Unfortunately, the design of the valve (20) limits their effectiveness in preventing liquid leakage from inside the inverted container (2) under all situations, particularly when the inverted container (2) has been impacted causing a substantial transient liquid pressure increase. The impact resistance system, as described in EP3492400B1 helps to absorb the transient liquid pressure increase after the impact and substantially reduce or prevent liquid leakage from the liquid dispenser (1). The present improvements to the impact resistance system (30) improve both the leakage resistance from transient liquid pressure increases after

impact, as well as the leakage resistance for pressure changes during storage, especially for lower viscosity liquids. The present improvements to the impact resistance system (30) also improve control of the dosage of the liquid compositions contained therein.

Impact Resistance System

[0048] According to the invention, the liquid dispenser (1) further comprises an impact resistance system (30) (as shown in Figure 7) localized upstream of the valve (20). The system (30) comprises a housing (31) having a cavity (32) therein, as shown in figures 8 to 12. The housing (31) extends longitudinally from the body (10) radially inward from the sleeve (11). That is, in a direction parallel to axis "L", as shown in Figure 3. The housing (31) is a substantially rigid structure and may be molded from plastic material, preferably a thermoplastic material, more preferably polypropylene. As shown in Figures 7 to 12, the housing (31) is preferably substantially cylindrical shaped. The housing can have a length along the longitudinal axis (L) of from 5.0 mm to 100 mm, preferably from 8.0 mm to 50 mm, more preferably from 10 mm to 30 mm. The housing (31) preferably has a diameter of from 10 mm to 70 mm, preferably from 15 mm to 50 mm. The diameter is measured as the diameter of the housing internal surface (35). The housing internal surface (35) forms part of the boundary of the cavity (32). However, it should be understood that the housing (31) may have any desired size and shape, such as for example, oval, pyramid, rectangular, etc. Where the housing is not cylindrical shaped, the diameter is taken as the diameter of a cylinder having the same cross-sectional area as the housing internal surface (35), measured at the height of the lower edge (38) of the at least one inlet opening (33a). However, the size and shape of the housing (31) will, of necessity, be a function of the internal volume needed for the compressible substance. For example, when a higher volume of compressible substance is required, a wider diameter of the housing might be preferred. Preferably, the housing (31) has an inside volume of from 375 mm³ to 400,000 mm³, preferably from 600 mm³ to 100,000 mm³, more preferably from 1,500 mm³ to 60,000 mm³. Preferably the compressible substance has a volume of from 200 mm³ up to 375,000 mm³, preferably from 400mm³ up to 95,000mm³, most preferably from 1,000mm³ up to 55,000mm³.

[0049] Furthermore, the housing (31) comprises at least one inlet opening (33a) that provides a flow path for the liquid from the inverted container (2) into the housing (31). Preferably the inlet opening (33a) is an opening between the discharge conduit (12) and the valve (20). The phrase "at least one" inlet opening (33a) means one or more inlet openings (33a) located on the housing (31). For example, it may be desirable to have one larger inlet opening (33a) or multiple smaller inlet openings (33a). It would be expected that the viscosity and density of the liquid contained inside of the inverted container (2) factors into the design of the size, shape and number of the inlet openings (33a). The inlet opening (33a) functions as an opening for providing a liquid flow path to establishing fluid communication with the liquid contained inside the inverted container (2) and the housing (31). As shown in Figures 7 to 12, the inlet opening (33a) is preferably positioned near the bottom of the housing (31) and preferably is rectangular shaped. The inlet opening (33a) can have a length of between 1 mm and 25 mm, preferably between 5 mm and 20 mm. The inlet opening (33a) can have a height of from 1 mm to 10 mm, preferably from 3 mm to 7 mm.

[0050] Other shaped and sized inlet openings (33a) can also be operable so long as they can still provide sufficient flow of liquid from the inverted container (2) into the housing (31). For instance, the housing (31) can contain three small circular inlet openings (33a) disposed at equal distance near the bottom or one semi-circle surrounding half of the housing (31). Preferably, the inlet opening (33a) has a total surface area of from 1 mm² to 250 mm², preferably from 5 mm² to 150 mm², more preferably from 15 mm² to 100 cm².

[0051] As shown in Figure 9, the at least one inlet opening (33a) comprises a lower edge (38) proximal to the valve (20) localized in the body (10) and an upper edge (39) distal to the valve (20), such that the at least one inlet opening (33a) has an inlet opening height (H), measured parallel to the longitudinal axis L (see figures 3 and 7). The inlet opening (33a) preferably has a height (H) of from 0.5 mm to 7.5 mm, more preferably from 1.0 mm to 6.0 mm, more preferably from 1.5 mm to 3.5 mm. Where the housing (31) comprises more than one inlet opening (33a), the lower edge (38) is the lower edge (38) which is most proximal to the valve (20), localized in the body (10), and the upper edge (39) is the upper edge (39) which is most distal from the valve (20).

[0052] Also it is preferable that the inlet opening (33a) is positioned towards the bottom of the housing (31). The lower edge (38) of the at least one inlet opening (33a) (that is, the bottom of the at least one inlet opening) can be positioned longitudinally from the upper retainer surface (29a) a distance of less than 5.0 mm, preferably less than 4.0 mm, more preferably less than 3.0 mm from the upper retainer surface (29a).

[0053] As shown in figure 9, the housing (31) further comprises at least one outlet opening (33b) that provides a path of egress for the liquid from the housing (31) to the exterior atmosphere when the dispensing orifice (23) is opened.

[0054] As shown in Figures 8 to 12, the housing (31) further comprises a cavity (32). The cavity (32) is a hollow open space inside the housing (31). The cavity (32) is adapted to be partially occupied by a compressible substance. Preferably the compressible substance allows pressure equilibration between the valve interior side (21) and the valve exterior side (22) allowing the dispensing orifice (23) to be/ remain reactably closeable. In other words, the compressible substance is to remain uncompressed, prior to "impact" of the inverted container (2), at pressure sufficient to allow the valve (20) to remain

closed and retain the liquid inside the inverted container (2). The cavity (32) is also partially occupied by the liquid prior to "impact".

[0055] Preferably, the compressible substance is selected from a gas, a foam, a soft matter such as for example a sponge or a balloon, other viscoelastic substance (e.g., polysiloxanes), or a piston, preferably a gas, more preferably air. The compressible substance may comprise a piston (34) (not shown) moveable within the cavity (32) of the housing (31), the piston (34) coupled to a tension member attached to the distal end of the housing (31) and sealingly dividing the cavity (32) into a first (36) and second section (37). When a hydraulic hammer is subjected on the inverted container (2), liquid will flow from the inverted container (2) through the inlet opening (33a) into the housing (31). The liquid will press the piston (34) upwards into the cavity (32), compressing the compressible substance in between the piston (34) and the top part of the cavity accordingly, as such decreasing the downwards pressure on the valve (20). After the hydraulic pressure exposure passes, the compressible substance will decompress, moving the piston (34) back downwards and the liquid flows back from the housing (31) through the inlet opening (33a) into the inverted container (2).

[0056] Alternatively, the compressible substance may comprise a spring-loaded piston (34) (not shown). Here the spring functions as the compressible substance. For example, the volume above the piston (34) is filled with liquid and upon impact the transient hydraulic hammer force compresses the spring connected to the piston (34) causing the liquid in the volume above the piston (34) to evacuate back into the inverted container (2) via a small opening. The net outcome is a resultant net decrease of the downwards pressure on the valve (20) allowing it to remain closed during the impact. After the hydraulic pressure exposure passes, the spring will uncompress, moving the piston (34) back downwards and the liquid flows back from the inverted container (2) through the small opening into the volume above the piston (34).

[0057] Alternatively, the compressible substance may comprise a flexible bellow dome (55) (not shown). Here the transient hydraulic hammer force expands the bellow dome (55) causing the cavity (32) of the impact resistance system (30) to fill up with liquid, as such decreasing the downwards pressure on the valve (20). After the hydraulic pressure exposure passes, the flexible bellow dome (55) will deflate, returning the flexible bellow dome (55) to its starting shape and the liquid flows back from the housing (31) through the inlet opening (33a) into the inverted container (2). It will be understood that the flexible bellow dome (55) can be made of any flexible materials known to those skilled in the art.

[0058] Alternatively, the compressible substance may comprise a gas filled balloon (50) (not shown). Here the transient hydraulic hammer force compresses the balloon (50) allowing the cavity (32) of the impact resistance system (30) to fill up with liquid, as such decreasing the downwards pressure on the valve (20). After the hydraulic pressure exposure passes, the balloon (50) will expand again returning to its starting shape and the liquid flows back from the housing (31) through the inlet opening (33a) into the inverted container (2).

[0059] Alternatively, the compressible substance may comprise a flexible membrane (51) and a closed cavity (52) (both not shown). Here the transient hydraulic hammer forces the flexible membrane (51) to pop upwards and compresses the air inside the closed cavity (52) and allowing the cavity (32) of the impact resistance system (30) to fill up with liquid, as such decreasing the downwards pressure on the valve (20). After the hydraulic pressure exposure passes, the flexible membrane (51) will return to its starting position and the liquid flows back from the housing (31) through the inlet opening (33a) into the inverted container (2).

[0060] When the inverted container (2) is impacted, dropped or knocked over, the movement of the liquid inside the inverted container (2) causes an increased transient liquid pressure (i.e., hydraulic pressure hammer). This increased transient liquid pressure travels from the inside of the inverted container (2) through the inlet opening (33a) to the housing (31) and the valve interior side (21). The increased transient liquid pressure is of sufficient magnitude to exceed the combined force of the internal resistance force of the valve (20), as discussed herein above, and the opposing exterior atmospheric pressure acting on the valve exterior side (22). This causes the valve (20) to inadvertently open momentarily and leak liquid from the liquid dispenser (1) under such conditions.

[0061] The aim of the impact resistance system (30) is to divert the liquid movement (i.e., the increased transient liquid pressure) caused by the impact away from the valve interior side (21) and direct it towards the compressible substance. As shown in Figure 12, the increased transient liquid pressure compresses the compressible substance in the cavity (32) to absorb the pressure increase allowing for the pressure equilibration between the valve interior side (21) and the valve exterior side (22). As a result, the dispensing orifice (23) is allowed to remain reactably closeable under such conditions, thereby substantially reducing or preventing the tendency of the valve (20) to open during impact. The inventors have discovered that in order to maintain the reactably closeable state for the dispensing orifice (23) the preferred ratio of the volume of the gas, preferably air, inside the housing (31) at a steady state to the volume of the inverted container is higher than 0.001, preferably between 0.005 and 0.05, more preferably between 0.01 and 0.02. Without wishing to be bound by theory it is believed that a minimum compression threshold is desired to significantly reduce or prevent leakage risk under expected exposure conditions during transport or usage. This minimum compression threshold directly correlates with the volume of liquid that can be stored inside the inverted container (2).

[0062] For example, larger sized inverted containers (2) can hold larger liquid volumes. When these larger sized inverted containers (2) are impacted, a higher mass of liquid will move upon a hydraulic hammer and as such a higher increased transient liquid force ($F=m*a$ - second law of Newton, with "F" being force, "m" being mass of moving liquid, and

"a" being acceleration speed of moving liquid) and hence pressure will be created into the housing (31). As there is a limit towards how much transient pressure can be absorbed per unit of volume of compressible substance, when exceeding that threshold the remaining transient pressure will get translated onto the valve (20), causing leakage accordingly. As such a higher volume of compressible substance is required for higher volumes of liquid into the inverted container (2) to have enough impact resistance buffer to prevent leakage upon an eventual hydraulic hammer exposure.

[0063] In some applications, it is preferable to use the liquid dispenser (1) with an optional baffle (40). Preferably the baffle (40), if present, is located between the interior side (21) of the valve (20) and the impact resistance system (30). As shown in Figure 12, the baffle (40) can include an occlusion member (41) supported by at least one support member (42). Without wishing to be bound by theory, it is believed that the baffle (40) will act as an additional counter-force against the hydraulic hammer, as such further reducing a potential leakage risk. In other words, the baffle (40) functions as a wave breaker to protect the valve (20) from the turbulent kinetic energy of the hydraulic hammer. Suitable custom-made baffles (40) can be obtained from the APTAR Group.

[0064] As exemplified in Figures 8 to 12, the impact resistance system comprise a wall (60) positioned radially inwardly from the housing (31), extending longitudinally from the body (10), and encircling the valve interior side (21). The wall outer surface (36) preferably has a diameter of from 5.0 mm to 35 mm, preferably from 7.5 mm to 25 mm. Where the wall (60) is not cylindrical shaped, the diameter is taken as the diameter of a cylinder having the same cross-sectional area as the wall outer surface (36), measured at the height of the lower edge (38) of the at least one inlet opening (33a). The ratio of the diameter of the housing internal surface (35) to the diameter of the wall outer surface (36) is at least 1.5:1, preferably from at least 1.5:1 to 4:1, more preferably from at least 1.5:1 to 2.5:1.

[0065] The wall (60) extends longitudinally from the body (10) into the cavity (32) an overlap distance (O) further than the lower edge (38) of the at least one inlet opening (33a), such that the ratio of the overlap distance (O) to the inlet opening height (H) is 1.0 or higher, or from 1.0 to 5.0, preferably from 1.0 to 3.0, more preferably from 1.0 to 2.0. The wall (60) is preferably annular (cylindrical) in form. The wall (60) can extend longitudinally from the upper retainer surface (29a) a distance of from 4.5 mm to 30 mm, preferably from 6.0 mm to 20 mm, more preferably from 7.5 mm to 15 mm.

[0066] It has been found that improved dosing of high viscosity liquids can be achieved, while avoiding leakage, when the wall (60) is positioned substantially inwards from the housing (31), especially when the wall height is low, such that the ratio of the overlap distance (O) to the inlet opening height (H) is also low.

[0067] In addition to improving the resistance to leakage due to hydraulic hammer effects, the dispensers, comprising the wall (60) as described herein, also enable better dosing of smaller volumes, as well as improved leakage prevention, especially for low viscosity liquids.

Inverted Container

[0068] It will be evident that the invention can be used with any type of containers. Preferably, the liquid dispenser (1) is used with the type of inverted container (2) as depicted in Figure 1.

[0069] The inverted container (2), insofar as it has been described, may be of any suitable shape or design so long as it can rest in the upside-down position, the details of which form no part of the present invention directed to the liquid dispenser (1). The inverted container (2) can be made of any flexible plastic materials, such as thermoplastic polymers. The flexible materials are compressible enough to deform the inverted container (2) and enable dosing of the liquid yet sufficiently flexible to enable relatively fast shape recovery from the deformation post dosing. Preferably, the flexible plastic materials are polycarbonate, polyethylene (PE), polypropylene (PP), polyvinylchloride (PVC), polyethyleentereftalaat (PET) or the like, or blends or multilayer structures thereof. The flexible plastic material may also contain container specific moisture or oxygen barrier layers like ethylene vinyl alcohol (EVOH) or the like. The flexible plastic materials may also partially or fully comprise post-consumer recycled materials from bottles, other containers and the like. The inverted container (2) includes an opening (5) (not shown) so as to enable liquid to pass from the inverted container (2) into the liquid dispenser (1). With reference to Figure 1, the opening (5) (not shown) is situated at the bottom of the inverted container (2). In other words, the inverted container (2) is dosed from the bottom.

[0070] Preferably the liquid dispenser (1) does not comprise a closing cap or seal that is suitable for closing the dispensing orifice (23). Alternatively, the liquid dispenser (1) can comprise a doser which is sized to comprise sufficient liquid detergent composition to dose, for example, into a laundry washing machine. The doser can be releasably attached to the liquid dispenser (1), such that it closes the dispensing orifice (23). It is advantageous to not include any other closing cap or seal so that the consumer may more easily and quickly dose the liquid from inside the inverted container (2) without bothering with the additional step of opening the cap. Additionally, the closing cap may be accidentally removed from the container (2) or consumers forget to reclose or failed to reclose properly the cap on the inverted containers (2) and therefore may fail to prevent liquid leakage.

[0071] The inverted container (2) preferably is a squeezable inverted container (2), having at least one, preferably at least two, resiliently deformable sidewall or sidewalls (3). Preferably the inverted container (2) is characterized as having from 5 N to 30 N @ 15mm sidewalls deflection, preferably 10 N to 25 N @ 15 mm sidewalls deflection, more preferably 18 N,

@ 15 mm sidewalls (3) deflection. The inverted container (2) may be grasped by the consumer, and the resiliently deformable sidewall or sidewalls (3) may be squeezed or compressed causing pressure to be applied (also referred to as "applied force") to compress the compressible substance in the space (32). As a result, the increase of the internal pressure causes the liquid between the inverted container (2) and the valve (20) to be dispensed to the exterior atmosphere through the dispensing orifice (23). When the squeezing or compressing force is removed, the resiliently deformable sidewall or sidewalls (3) are released to vent air from the exterior atmosphere to the space (32) to decompress the compressible substance in the space (32) and return the resiliently deformable sidewall or sidewalls (3) to its original shape. Additionally, the venting also refills the cavity (32) of the housing (31) with air from the exterior atmosphere. The vented air moves back into the inverted container (2) via the inlet opening (33a) to compensate for the volume of dispensed liquid.

[0072] For inverted containers (2), the spring-back of the container (2) after the squeezing force for dispensing has been removed provides the pressure differential to draw air through the orifice (30), so that the container (10) can return to its original shape after squeezing of the container (10). As such, the container has to be sufficiently stiff that it is able to provide sufficient spring-back force to draw air through the orifice (30) and allow the container (10) to return to its original shape. In addition, the container (2) should be sufficiently elastic that pressure differentials between the contents of the container (2) and the atmosphere due to changes in ambient temperature do not result in leakage of the contents of the container (2). As such, the resiliently squeezable container (10) can have an elasticity index of less than 2.5%, or from 0.75% to 1.75%, preferably from 0.85% to 1.4%, as measured using the elasticity index method described herein. The desired elasticity of the resiliently squeezable container (10) can be achieved using any suitable means, including through the selection of the material used for forming the container (10), limiting the wall thickness through using less resin material to make the container (10).

Liquid compositions

[0073] The inverted container (2) can comprise a liquid composition, preferably a liquid detergent composition, more preferably a liquid laundry detergent composition. As used herein, "liquid detergent composition" refers to liquid detergent composition, which is fluid, and preferably capable of wetting and cleaning a fabric, e.g., clothing in a domestic washing machine. As used herein, "laundry detergent composition" refers to compositions suitable for washing clothes. The composition can include solids or gases in suitably subdivided form, but the overall composition excludes product forms which are non-fluid overall, such as tablets or granules. The liquid laundry detergent composition preferably has a density in the range from 0.9 to 1.3 grams per cubic centimeter, more specifically from 1.00 to 1.10 grams per cubic centimeter, excluding any solid additives but including any bubbles, if present.

[0074] Aqueous liquid laundry detergent compositions are preferred. For such aqueous liquid laundry detergent compositions, the water content can be present at a level of from 5 % to 99 %, preferably from 15 % to 90 %, more preferably from 25 % to 80 % by weight of the liquid detergent composition.

[0075] The pH range of the detergent composition is from 6.0 to 8.9, preferably from pH 7 to 8.8. The pH is measured, at 25°C, using a Santarius PT-10P pH meter with gel-filled probe (such as the Toledo probe, part number 52 000 100), calibrated according to the instructions manual. The pH is measured in a 10% dilution in demineralised water (i.e. 1 part laundry detergent composition and 9 parts demineralised water).

[0076] Compositions of use in the present invention can be Newtonian or non-Newtonian, preferably non-Newtonian in the usage shear rate range of from 0.1 s^{-1} to 100 s^{-1} . Preferably, the liquid detergent composition has a viscosity of 50 to 5,000, preferably 75 to 1,000, more preferably 100 to 500 mPa.s, when measured at a shear rate of 100 s^{-1} , at a temperature of 20°C. For improved phase stability, and also improved stability of suspended ingredients, the liquid detergent composition has a viscosity of 50 to 250,000, preferably 5,000 to 125,000, more preferably 10,000 to 35,000 mPa.s, when measured at a shear rate of 0.05 s^{-1} , at a temperature of 20°C. The viscosity is measured using an AR 2000 rheometer from TA instruments using a cone and plate geometry with a 40 mm diameter and an angle of 1°. The viscosity at the different shear rates is measured via a logarithmic shear rate sweep from 0.1 s^{-1} to 1200 s^{-1} in 3 minutes time at 20°C. Low shear viscosity is measured at a continuous shear rate of 0.05 s^{-1} .

[0077] Suitable liquid detergent composition, and especially liquid laundry detergent compositions comprise a deterative surfactant. Deterative surfactant as used herein means surfactants or mixtures of surfactants that provide cleaning, stain removing, or laundering benefit to soiled material. Suitable deterative surfactants can be: anionic surfactant, nonionic surfactant, zwitterionic surfactant, and combinations thereof. The deterative surfactant comprises a combination of anionic and nonionic surfactant.

[0078] The laundry composition can comprise deterative surfactant at a level of from 3 wt% to 50 wt%, preferably from 10 wt% to 37.5 wt%, more preferably from 15 wt% to 30 wt%.

[0079] Suitable anionic surfactants can be selected from the group consisting of: alkyl sulphates, alkyl ethoxy sulphates, alkyl sulphonates, alkyl benzene sulphonates, fatty acids and their salts, and mixtures thereof. However, by nature, every anionic surfactant known in the art of detergent compositions may be used, such as disclosed in "Surfactant Science

Series", Vol. 7, edited by W. M. Linfield, Marcel Dekker. However, the composition preferably comprises at least a sulphonic acid surfactant, such as a linear alkyl benzene sulphonic acid, but watersoluble salt forms may also be used. Alkyl ethoxy sulphates, or mixtures thereof, are also preferred.

[0080] The liquid detergent composition can comprise nonionic surfactant. The level of nonionic surfactant in the liquid detergent composition can be present at a level of from 1.0% to 20%, preferably from 2.5% to 15%, more preferably from 5.0% to 12.5% by weight of the composition.

[0081] Suitable nonionic surfactants include, but are not limited to C12-C18 alkyl ethoxylates ("AE") including the so-called narrow peaked alkyl ethoxylates and C6-C12 alkyl phenol alkoxyates (especially ethoxylates and mixed ethoxy/propoxy), block alkylene oxide condensate of C6-C12 alkyl phenols, alkylene oxide condensates of C8-C22 alkanols and ethylene oxide/propylene oxide block polymers (Pluronic - BASF Corp.), as well as semi polar nonionics (e.g., amine oxides and phosphine oxides) can be used in the present compositions. An extensive disclosure of these types of surfactants is found in U.S. Pat. 3,929,678, Laughlin et al., issued December 30, 1975.

[0082] The liquid detergent composition can comprise an amphoteric or zwitterionic deterative surfactants, preferably at a level of from 0.1 wt% to 5 wt%, more preferably from 0.2 wt% to 2 wt%, most preferably from 0.4 wt% to 1 wt %.

[0083] Suitable amphoteric or zwitterionic deterative surfactants include those which are known for use in hair care or other personal care cleansing. Non-limiting examples of suitable zwitterionic or amphoteric surfactants are described in U.S. Pat. Nos. 5,104,646 (Bolich Jr. et al.), 5,106,609 (Bolich Jr. et al.). Suitable amphoteric deterative surfactants include those surfactants broadly described as derivatives of aliphatic secondary and tertiary amines in which the aliphatic radical can be straight or branched chain and wherein one of the aliphatic substituents contains from 8 to 18 carbon atoms and one contains an anionic group such as carboxy, sulfonate, sulfate, phosphate, or phosphonate. Suitable amphoteric deterative surfactants for use in the present invention include, but are not limited to: cocoamphoacetate, cocoamphodiaceate, lauroamphoacetate, lauroamphodiaceate, and mixtures thereof.

[0084] Preferably surfactants comprising saturated alkyl chains are used.

[0085] The laundry detergent composition of the present invention can comprise an enzyme cocktail, wherein the enzyme cocktail comprises a xanthan endoglucanase, a xanthan lyase, and a mannanase.

[0086] The detergent composition may additionally comprise one or more of the following optional ingredients: external structurant or thickener, enzymes, enzyme stabilizers, cleaning polymers, bleaching systems, optical brighteners, hueing dyes, particulate material, perfume and other odour control agents, hydrotropes, suds suppressors, fabric care benefit agents, pH adjusting agents, dye transfer inhibiting agents, preservatives, non-fabric substantive dyes and mixtures thereof. In more preferred embodiments, the laundry detergent composition does not comprise a bleach.

[0087] External structurant or thickener: Preferred external structurants and thickeners are those that do not rely on charge - charge interactions for providing a structuring benefit. As such, particularly preferred external structurants are uncharged external structurants, such as those selected from the group consisting of: non-polymeric crystalline, hydroxyl functional structurants, such as hydrogenated castor oil; microfibrillated cellulose; uncharged hydroxyethyl cellulose; uncharged hydrophobically modified hydroxyethyl cellulose; hydrophobically modified ethoxylated urethanes; hydrophobically modified non-ionic polyols; and mixtures thereof.

TEST METHODS

[0088] The following assays set forth must be used in order that the invention described and claimed herein may be more fully understood.

Leakage under impact

[0089] The purpose of this test is to assess the ability of a liquid dispenser to prevent leakage of the liquid from an inverted container during "impact". The impact occurs when the inverted container is dropped, liquid dispenser side down, from a certain height onto a flat surface. The drop is supposed to mimic the resulting transient liquid pressure increases upon impact inside the inverted container. The leakage resistance ability of the liquid dispenser is evaluated through measurement of the drop height till which no volume/weight of the liquid leaks out when dropped. A higher leak-free drop height correlates to better leakage resistance ability for the liquid dispenser. The steps for the method are as follows:

1. Use a drop tester apparatus as shown in Figure 13. The apparatus consists of two top and bottom open ended cylindrical tubes with an approximate diameter of 12 cm, i.e. an outer tube tightly surrounding an inner tube movable in vertical direction into the outer tube, the outer tube having a cut out section to enable visual assessment of the relative height of the inner tube within the outer tube through a grading scale applied on the outer tube. A removable lever is applied at the bottom of the inner tube, allowing an inverted container (2) positioned with its opening downwards within the inner tube to rest on the lever. When the lever is manually removed the inverted container drops down and the amount of leaked liquid after the exposure is weighed. Therefore a piece of paper is positioned on a hard surface at the

bottom of the open ended outer container to capture the leaked liquid. The weight of the paper is measured on a balance prior and after the drop test to define the amount of leaked liquid. The height at which the lever was positioned prior to manual removal is measured as the drop height.

2. Fill an inverted container (2) having a defined volume (e.g., 400 mL or 650 mL) with a standard liquid dishwashing detergent having a density of 1.03 g/mL and a Newtonian viscosity of 1000 cps at 20 °C when measured on a Brookfield type DV-II with a spindle 31 at rotation speed 12 RPM to a defined fill level within the inverted container. For example, with a 400 mL inverted container fill with 400 mL of liquid dishwashing detergent, and with a 650 mL inverted container fill with 650 mL of liquid dishwashing detergent. The liquid fill level, inverted container volume and liquid composition is kept constant when cross-comparing different closing systems.

3. Assemble a liquid dispenser comprising a valve (Simplicity 21-200 "Simplisqueeze®" valve available from Aptar Group, Inc.) with the inverted container (2), as shown in Figures 4 to 6. The liquid dispenser has a frustoconical shaped exterior portion (e.g., bottom diameter 65 mm, top diameter 34 mm and height 30 mm) for resting on the flat surface, and optionally fitted with an internally developed baffle (e.g., diameter 7 mm, 5 ribs emerging from center ball of 4 mm to the outside), an impact resistance system (30) according to the present invention or both.

4. Set up the drop height (from 2 cm to 15 cm) on the drop tester.

5. Cut a piece of paper approximately 7 cm x 7 cm for fitting the opening at the lower end of the outer tube.

6. Weigh the piece of paper using a Mettler Toledo PR1203 balance and record its weight.

7. Place the piece of paper under the opening at the lower end of the outer tube.

8. Place the assembled liquid dispenser and inverted container (2), liquid dispenser side down, into the inner tube of the drop tester.

9. Pull back the lever in the drop tester in a quick and smooth motion.

10. Remove the tubes and the assembled liquid dispenser and inverted container from the drop tester.

11. Weigh the piece of paper a second time and record the weight. Calculate the weight difference of the paper, and the delta corresponds to the amount of liquid leaked from the liquid dispenser.

12. Repeat steps 5 to 11 four more times for a total of five replicates for each test condition.

13. Calculate the average maximum drop height at which no liquid leaked.

Immersed volume, Overflow volume and Elasticity index

[0090] The test is done on containers which are at least 3 days old, in order to avoid the effects of container shrinkage after making. The test is done at a room temperature of 20 °C and a room atmospheric pressure of 1013 +/- 1 Pa.

[0091] Distilled water having a density of 1.000 +/- 0.002 g/ml, when measured at 20 °C is added to a beaker of volume at least 5 L. If desired, a dye may be added to improve visibility, so long as the target density is achieved.

[0092] The container is weighed using a laboratory balance having an accuracy of 0.001 g.

[0093] The container is then fully immersed in the beaker, with the opening facing up with the distilled water in the beaker at 20 °C, expelling any remaining air in the container by gentle shaking. Holding the container by the stiffest part of the neck, the container is carefully lifted out of the beaker while avoiding squeezing of the container and spilling any of the solution. The filled container is wiped dry and re-weighed on the balance, in order to measure the weight of solution contained in the container when the container was immersed. From the weight of the distilled water, the immersed volume (ml) can be deduced. The container is then topped up to the brim with additional distilled water at 20 °C and the container reweighed, in order to measure the weight of the distilled water contained within the container after topping up to the brim. From this weight of surfactant solution, the overflow volume can be deduced. The overflow volume is the total volume of the distilled water contained in the container after topping up. The time between immersion in the basin and weighing must be less than 2 minutes.

[0094] The elasticity index is calculated using the following equation, expressed as a percent:

$$\text{Elasticity index} = \frac{\text{Overflow volume} - \text{Immersed volume} \times 100\%}{\text{Immersed volume}}$$

Peak pressure

[0095] The peak pressure is the pressure within the empty container at a defined temperature above the fill temperature. A temperature and pressure probe (preferably MSR145B4 data logger) is placed within the empty container and the container is capped with a sealingly engaged cap (without an orifice), with the container maintained at a temperature of 20 °C and an atmospheric pressure of 1013 +/- 1 Pa, while ensuring that no additional pressure beyond the surrounding atmospheric pressure is exerted on the container during capping. The container is placed within a constant temperature

oven, set at the desired temperature for 4 hours at 1013 +/- 1 Pa and the maximum (peak) pressure logged by the temperature and pressure probe is recorded. The method is repeated using 5 different containers and the average peak pressure is recorded.

5 Leakage due to pressure changes

[0096] The containers are filled to 10% of the container size (recommended fill volume) at 20 °C with Fairy® original dark green dishwashing product having a viscosity in the range of 1,000 +/- 200 mPa.s, measured at a shear rate of 10 s⁻¹ (for example, Belgian market product, 2018), and the containers sealed with caps comprising V21 - 145 slit-valves (supplied by Aptar). Cups are weighed before the containers are placed upside down in the cups, with the container cap positioned a distance from the bottom of the cup. The containers are then placed, with the cups in a constant temperature oven kept at 40 °C. The containers and cups are then removed from the oven after an hour, the container removed from the cup and the cup reweighed, in order to measure the weight of product that has leaked from the container.

15 Minimum dosage

[0097] The dosing control method provides a method to determine the ease of dosing small volumes. For the test, the commercially available "Joy®" dishwashing 330 ml container, as sold in Japan in October 2023, is preferably used. However, alternative containers having a cylindrical volume of a similar volume can be used, as the method provides a comparative dosing assessment for the different dispensers being compared. Improved dosing is signified by a reduced minimum dosage delivered during the test.

[0098] The container is filled with 210g of a liquid composition having an essentially Newtonian viscosity of 160 mPa.s in the shear rate range of from 0.1 s⁻¹ to 100 s⁻¹, such as the "Joy®" dishwashing detergent sold by Procter & Gamble in Japan in October 2023. The bottle is then squeezed and kept as such while the dispenser is fitted to the container before the assembled bottle is inverted and the squeezing pressure released. The container is allowed to recover its shape by drawing air through the dispenser orifice and left for 5 minutes to ensure equilibration.

[0099] A container is placed on a microbalance (at least 0.01g accuracy) and the bottle is positioned above the container at a height of approximately of 80 mm. The container is then squeezed slowly to dispense the smallest possible dosage and the weight of the dose is measured using the microbalance.

[0100] The test is repeated 5 times and the dosage values are averaged over the 5 attempts.

[0101] All percentages and ratios herein are calculated by weight unless otherwise indicated. All percentages and ratios are calculated based on the total composition unless otherwise indicated.

[0102] It should be understood that every maximum numerical limitation given throughout this specification includes every lower numerical limitation, as if such lower numerical limitations were expressly written herein. Every minimum numerical limitation given throughout this specification will include every higher numerical limitation, as if such higher numerical limitations were expressly written herein. Every numerical range given throughout this specification will include every narrower numerical range that falls within such broader numerical range, as if such narrower numerical.

[0103] The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as "40 mm" is intended to mean "about 40 mm."

Claims

1. A liquid dispenser (1) for affixing to an inverted container (2) containing dispensable liquid, the dispenser (1) comprising:

a) a body (10) of the dispenser (1) comprising a connecting sleeve (11), wherein the connecting sleeve (11) is adaptable for engaging to an exterior surface proximate an opening (5) of the inverted container (2) and is spaced radially inwardly to define an internal discharge conduit (12) for establishing fluid communication with the liquid contained in the inverted container (2);

b) a valve (20) localized in the body (10) extending across the internal discharge conduit (12), the valve (20) having an interior side (21) for being contacted by the liquid contained inside the inverted container (2) and an exterior side (22) for being exposed to the exterior atmosphere, wherein the valve (20) defines a dispensing orifice (23) that is reactably openable when the pressure on the valve interior side (21) exceeds the pressure on the valve exterior side (22); and

c) an impact resistance system (30) localized upstream of the valve (20), the system (30) comprises: a housing

(31) having a cavity (32) therein and extending longitudinally from the body (10) and radially inwardly from the sleeve (11);

wherein the housing (31) comprises at least one inlet opening (33a) that provides a flow path for the liquid from the inverted container (2) into the housing (31), and at least one outlet opening (33b) that provides a path of egress for the liquid from the housing (31) to the exterior atmosphere when the dispensing orifice (23) is opened, wherein the cavity (32) is adapted to be partially occupied by a compressible substance, wherein the at least one inlet opening (33a) comprises a lower edge (38) proximal to the body (10) and an upper edge (39) distal to the body (10), such that the at least one inlet opening (33a) has an inlet opening height (H),

characterised in that:

the impact resistance system (30) further comprises a wall (60) positioned radially inwardly from the housing (31), extending longitudinally from the body (10), and encircling around the valve interior side (21), and the wall (60) extends longitudinally from the body (10) further than the upper edge (38) of the at least one inlet opening (33a),

wherein the ratio of the overlap distance (O) to the inlet opening height (H) is 1.0 or higher, and the ratio of the diameter of the housing internal surface (35) to the diameter of the wall outer surface (36) is at least 1.5:1.

2. The liquid dispenser (1) according to claim 1, wherein the housing (31) has an internal volume of from 375 mm³ to 400,000 mm³, preferably from 600 mm³ to 100,000 mm³, more preferably from 1,500 mm³ to 60,000 mm³.
3. The liquid dispenser (1) according to any of the preceding claims, wherein the inlet opening (33a) has a total surface area of from 1 mm² to 250 mm², preferably from 5 mm² to 150 mm², more preferably from 15 mm² to 100 cm².
4. The liquid dispenser (1) according to any of the preceding claims, wherein the inlet opening (33a) has a height (H) of from 0.5 mm to 7.5 mm, preferably from 1.0 mm to 6.0 mm, more preferably from 1.5 mm to 3.5 mm.
5. The liquid dispenser (1) according to any of the preceding claims, wherein the ratio of the overlap distance (O) to the inlet opening height (H) is from at least 1.5:1 to 4:1, more preferably from at least 1.5:1 to 2.5:1.
6. The liquid dispenser (1) according to any of the preceding claims, wherein the body (10) or the housing (31) comprises an upper retainer surface (29a), and the lower edge (38) of the at least one inlet opening (33a) is positioned longitudinally from the upper retainer surface (29a) a distance of less than 5.0 mm, preferably less than 4.0 mm, more preferably less than 3.0 mm from the upper retainer surface (29a).
7. The liquid dispenser (1) according to any of the preceding claims, wherein the body (10) or the housing (31) comprises an upper retainer surface (29a), and the wall (60) extends longitudinally from the upper retainer surface (29a) a distance of from 4.5 mm to 30 mm, preferably from 6.0 mm to 20 mm, more preferably from 7.5 mm to 15 mm.
8. The liquid dispenser (1) according to any of the preceding claims, wherein the housing (31) comprises of a plastic material, preferably a thermoplastic material, preferably polypropylene.
9. The liquid dispenser (1) according to any of the preceding claims, wherein the internal resistance force of the valve (20) is at least 10 mbar, preferably at least 25 mbar to open the dispensing orifice (23).
10. The liquid dispenser (1) according to claim 9, wherein the internal resistance force of the valve (20) is less than 250 mbar, more preferably less than 150 mbar, most preferably less than 75 mbar.
11. The liquid dispenser (1) according to any of the preceding claims, wherein the valve (20) comprises of a flexible central portion (24) having at least two, preferably a plurality of, slits (25) which extend radially outward to distal ends (26), the slits (25) intersect to define the dispensing orifice (23).
12. The liquid dispenser (1) according to any of the preceding claims, wherein the body (10) comprises at a bottom end (B) an exterior portion (14) adapted for resting the inverted container (2) on a flat surface in the upside-down position.
13. The liquid dispenser (1) according to any of the preceding claims, further comprising a baffle (40) located in between the interior side (21) of the valve (20) and the impact resistance system (30), preferably the baffle (40) includes an occlusion member (41) supported by at least one support member (42).

- 14.** An inverted container (2) comprising the liquid dispenser (1) according to any of the preceding claims, wherein the liquid dispenser (1) does not comprise a closing cap or seal.
- 15.** The inverted container (2) according to claim 14, wherein the inverted container (2) comprises a liquid detergent composition, preferably wherein the liquid detergent composition has a viscosity of 50 to 5,000, preferably 75 to 1,000, more preferably 100 to 500 mPa.s, when measured at a shear rate of 100 s^{-1} , at a temperature of 20°C .

5

10

15

20

25

30

35

40

45

50

55

Fig. 1

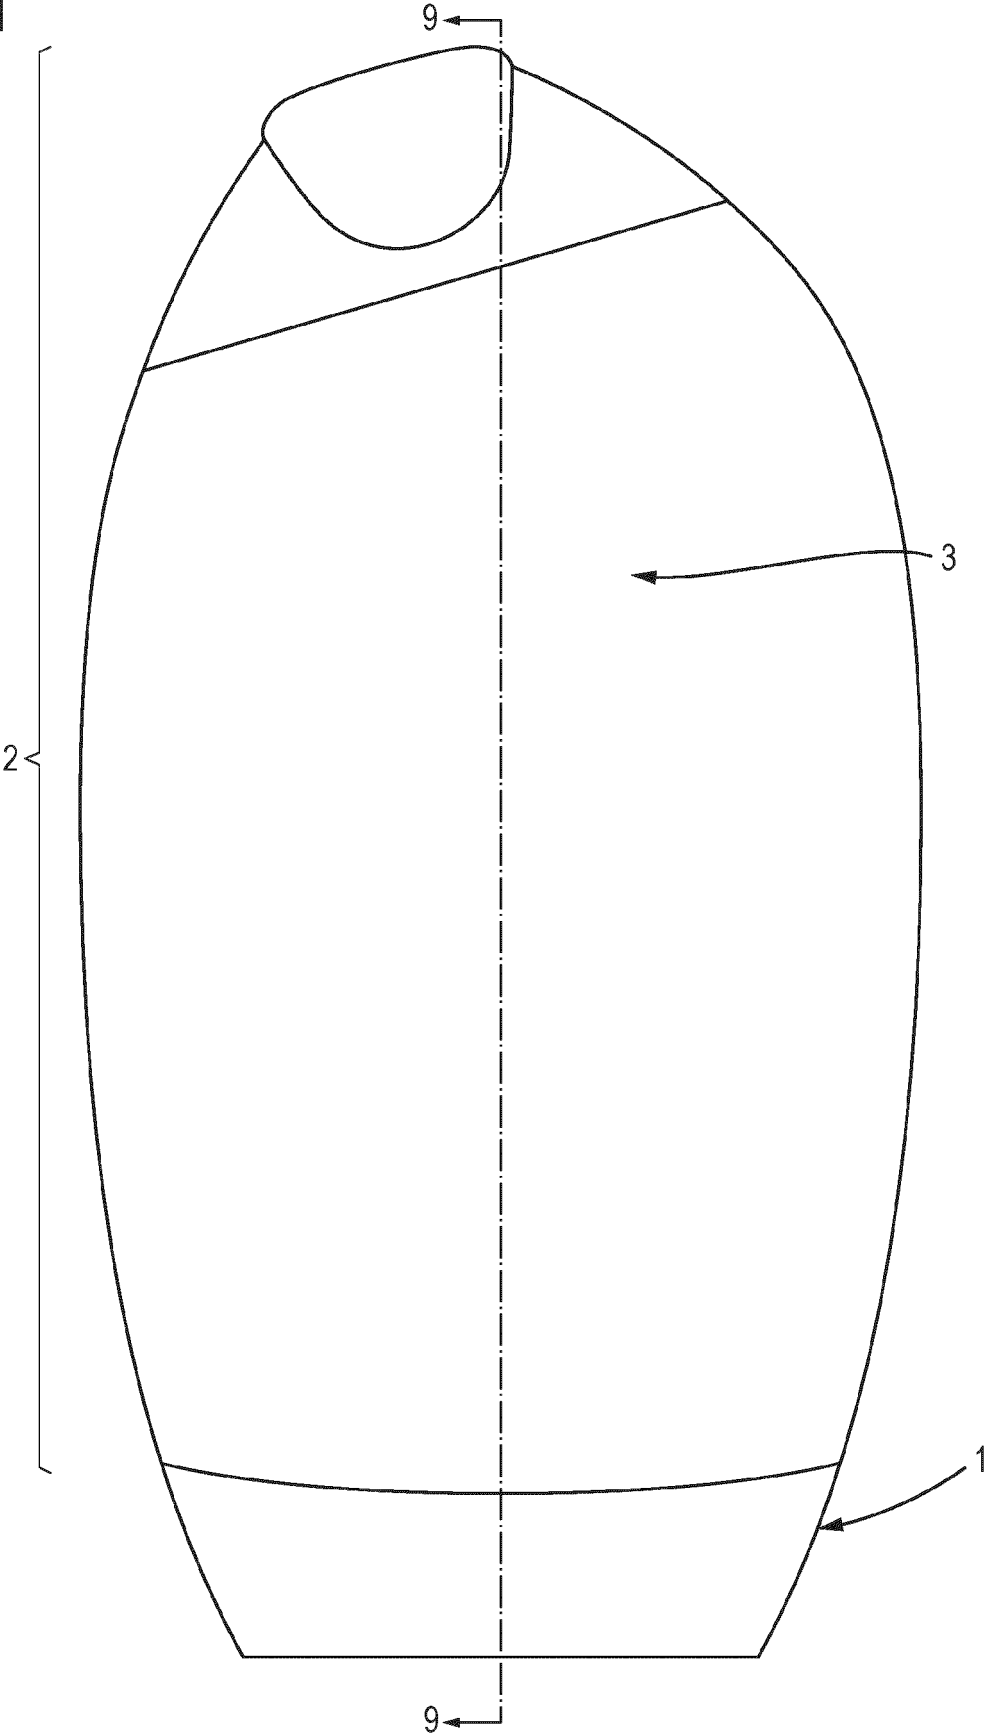


Fig. 2

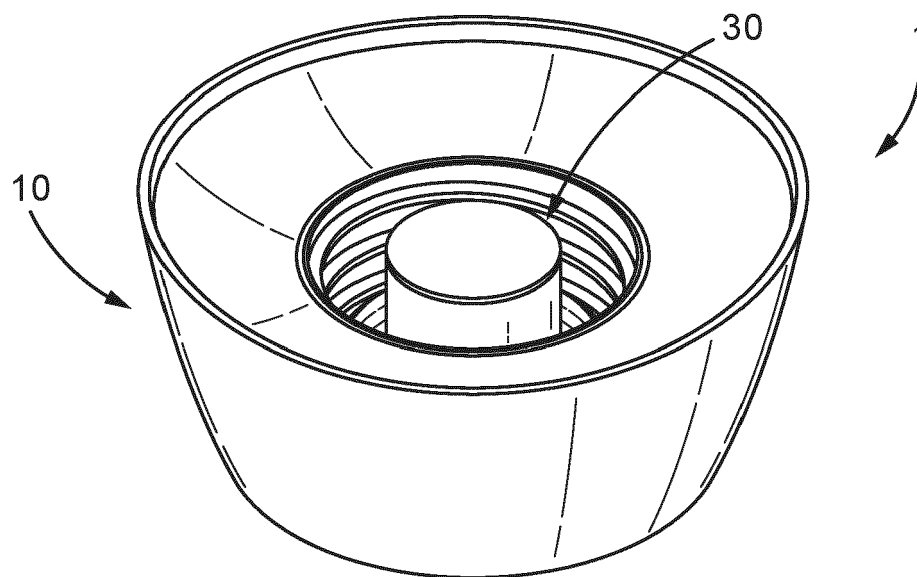


Fig. 3

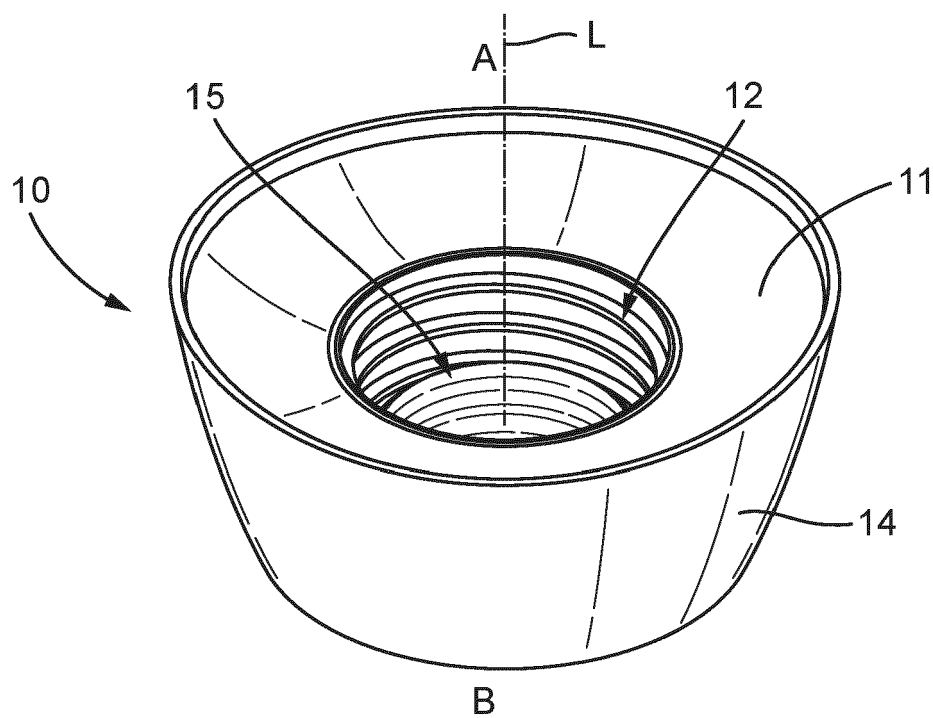


Fig. 4

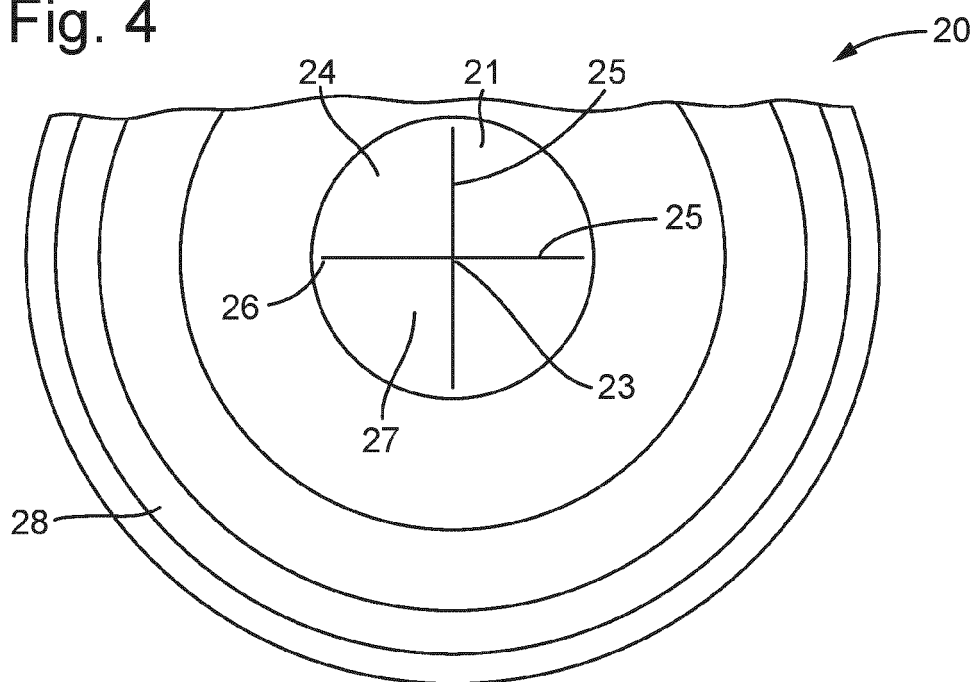


Fig. 5

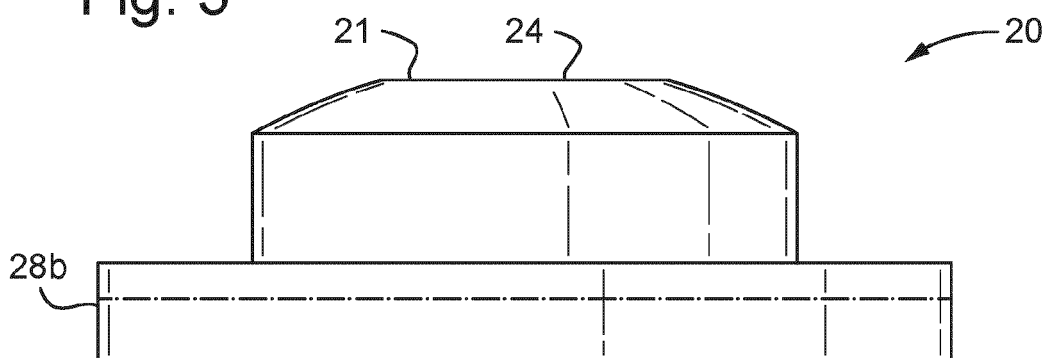


Fig. 6

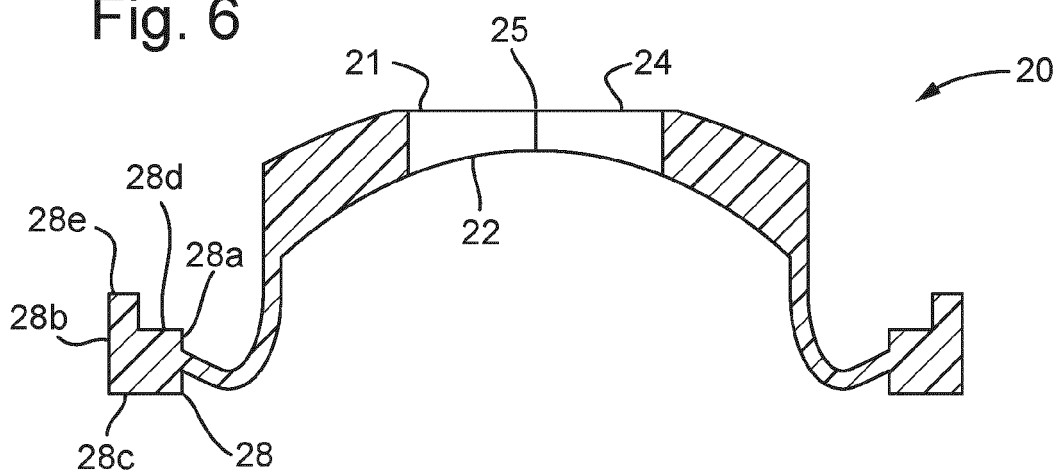


Fig. 7

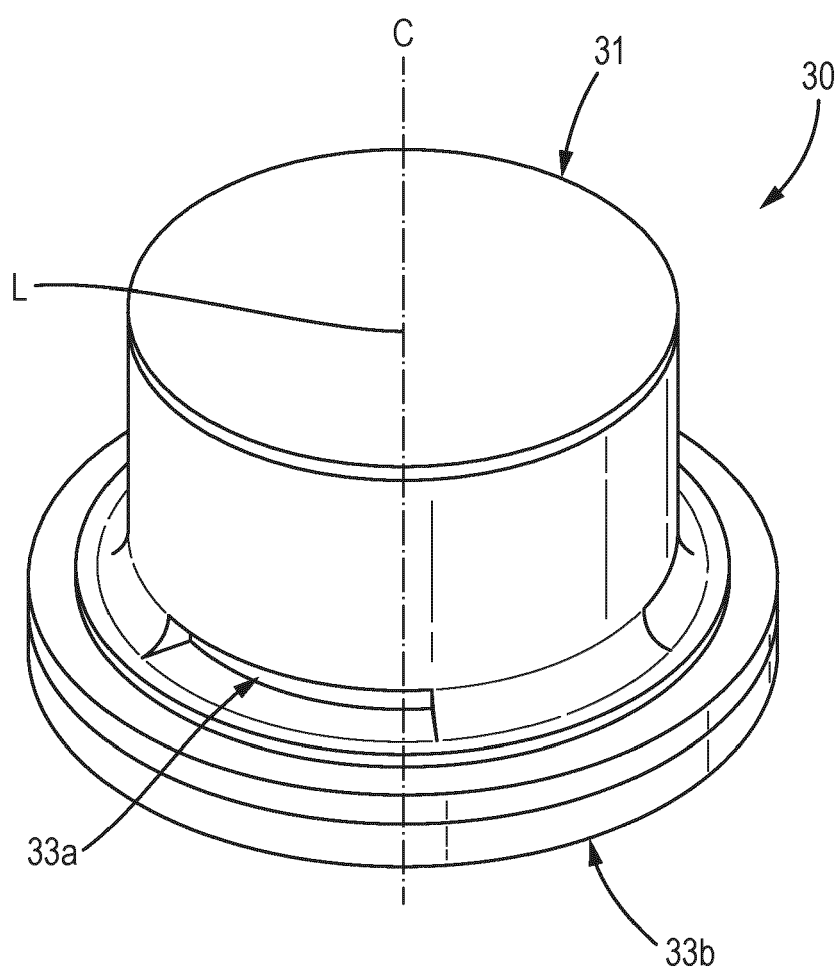


Fig. 8

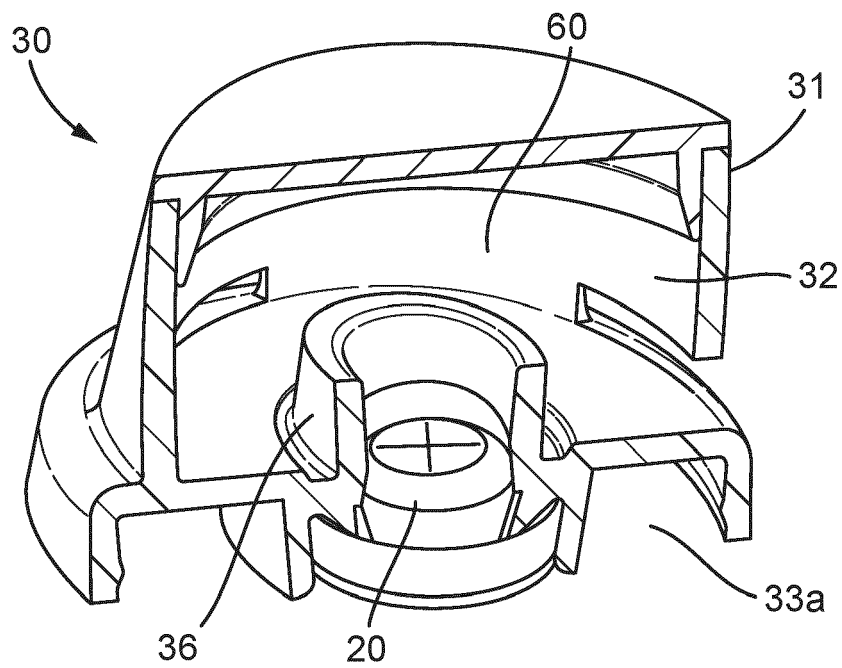


Fig. 9

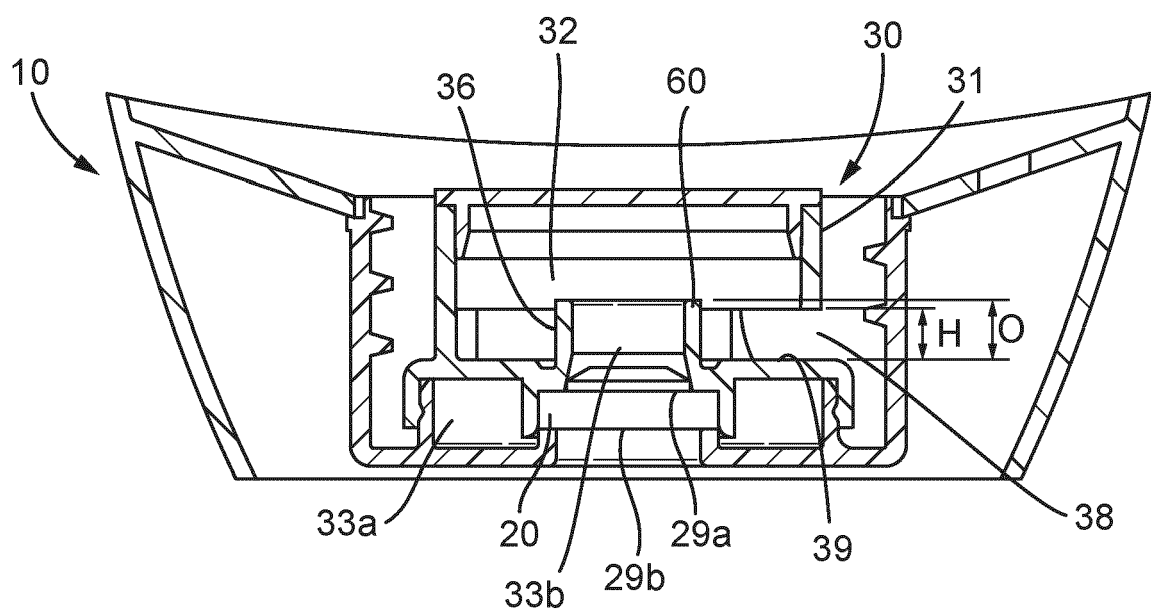


Fig. 10

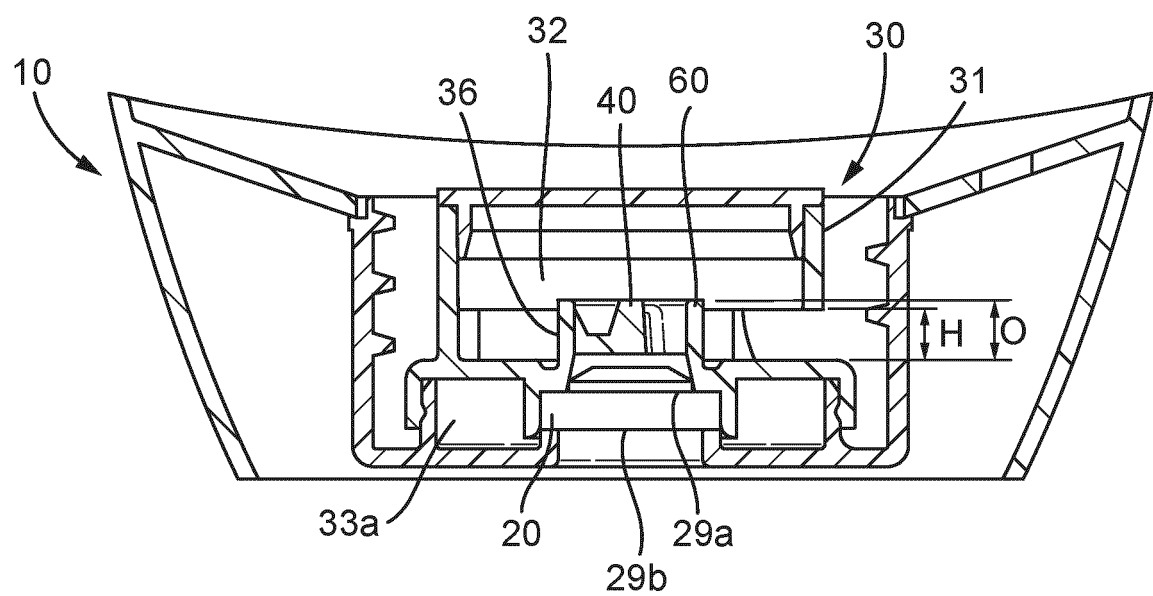


Fig. 11

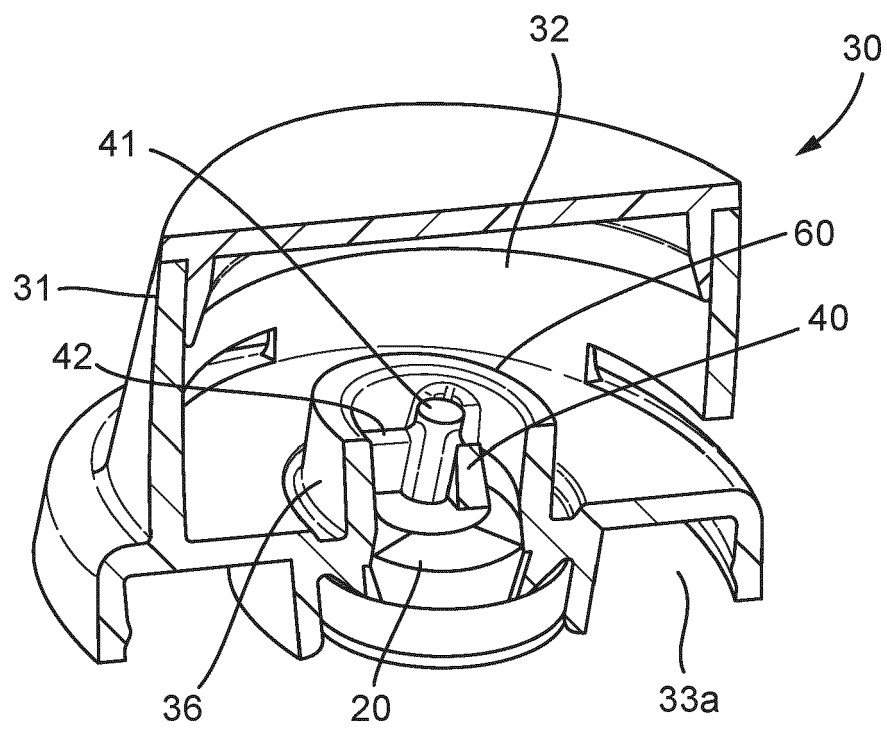


Fig. 12


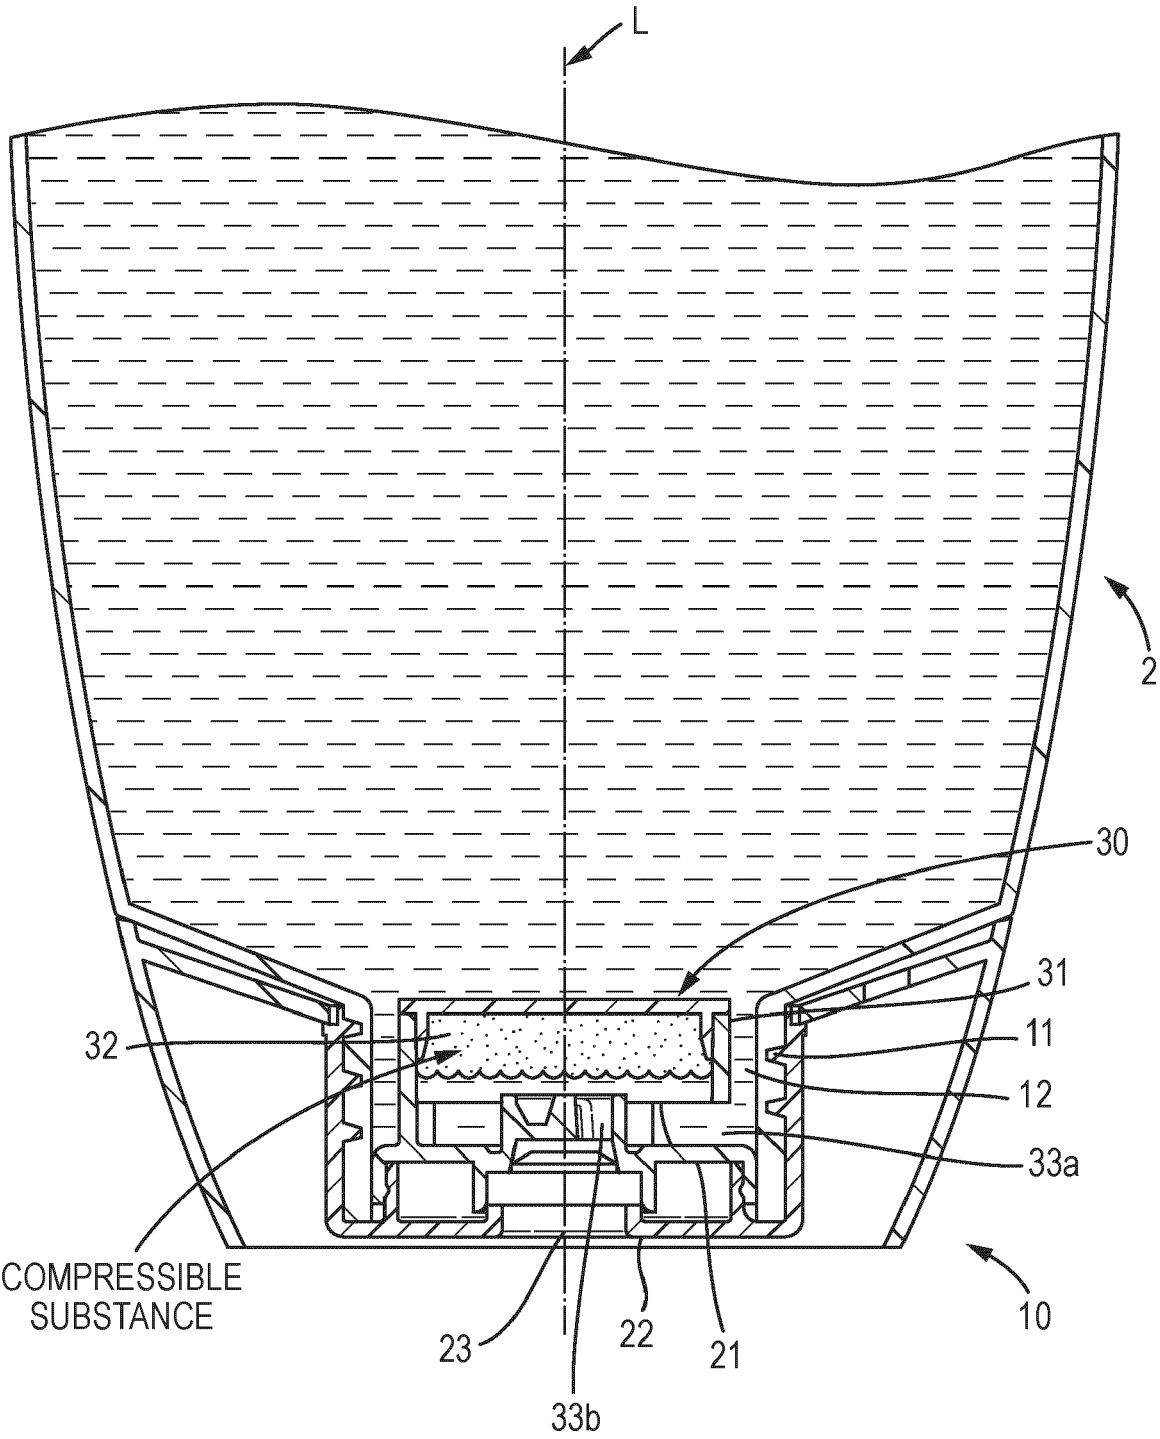


Fig. 13



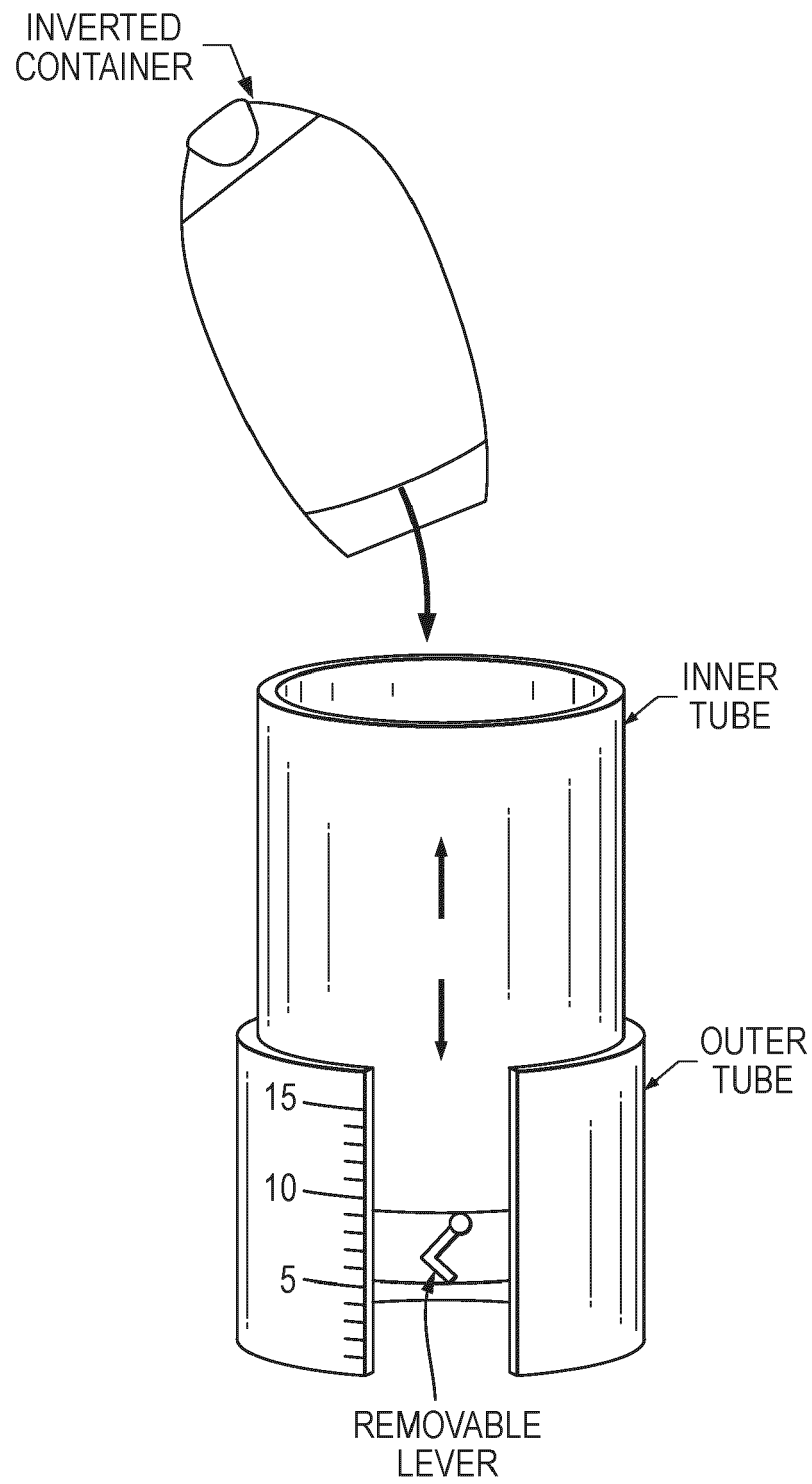

EUROPEAN SEARCH REPORT

Application Number

EP 24 18 3154

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 4 324 349 A (KAUFMAN JOHN G) 13 April 1982 (1982-04-13) * column 4, line 60 - line 63; figure 2 * -----	1-15	INV. B65D47/04 A47K5/122 B65D47/20 B65D51/24 B65D47/24
A	US 10 844 336 B2 (PROCTER & GAMBLE [US]) 24 November 2020 (2020-11-24) * column 19, line 36 - line 52; figures 7,9 * * column 20, line 50 - line 62 * -----	1-15	
A	JP H02 127252 A (SHIRAKI SHUZO) 15 May 1990 (1990-05-15) * figure 1 * -----	1	
			TECHNICAL FIELDS SEARCHED (IPC)
			B65D A47K
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		3 October 2024	Sundell, Olli
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 24 18 3154

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03 - 10 - 2024

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 4324349	A	13-04-1982	AU	542812 B2		14-03-1985
			BR	8105997 A		24-11-1981
			EP	0043846 A1		20-01-1982
			JP	S57500183 A		04-02-1982
			US	4324349 A		13-04-1982
			WO	8101993 A1		23-07-1981

US 10844336	B2	24-11-2020	EP	3511402 A1		17-07-2019
			ES	2976490 T3		02-08-2024
			JP	7332606 B2		23-08-2023
			JP	2021510756 A		30-04-2021
			JP	2023166394 A		21-11-2023
			PL	3511402 T3		06-05-2024
			US	2019218484 A1		18-07-2019
			US	2021032577 A1		04-02-2021
			WO	2019143653 A1		25-07-2019

JP H02127252	A	15-05-1990	NONE			

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 2784322 U, Liu Zhonghai [0004]
- WO 2014130079 A [0004]
- JP 2007176594 A [0004]
- WO 200068038 A [0004]
- JP H02127252 A [0004]
- EP 3492400 B1 [0004] [0047]
- EP 3511402 B1 [0004]
- EP 24175572 [0004]
- US 3929678 A, Laughlin [0081]
- US 5104646 A, Bolich Jr. [0083]
- US 5106609 A, Bolich Jr. [0083]

Non-patent literature cited in the description

- Surfactant Science Series. Marcel Dekker, vol. 7 [0079]