



(11)

EP 4 575 076 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
25.06.2025 Bulletin 2025/26

(51) International Patent Classification (IPC):
D06F 58/24 ^(2006.01) **D06F 58/20** ^(2006.01)

(21) Application number: **23218517.3**

(52) Cooperative Patent Classification (CPC):
D06F 58/24; D06F 58/206

(22) Date of filing: **20.12.2023**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC ME MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA
Designated Validation States:
KH MA MD TN

(71) Applicant: **BSH Hausgeräte GmbH**
81739 München (DE)

(72) Inventors:
• **Mikurenda, Piotr**
93-228 Lodz (PL)
• **Rózanski, Sebastian**
93-228 Lodz (PL)

(54) **LAUNDRY DRYING DEVICE COMPRISING A FLUID DIFFUSER ARRANGED ABOVE AN EVAPORATOR IN THE DRYING AIR CHANNEL**

(57) Laundry device, wherein the laundry device comprises at least one fluid diffuser configured to feed pumped water onto an evaporator to flush impurities, in particular fluff, from the evaporator into a collection container, wherein the at least one fluid diffuser comprises an inner flow channel for conducting the pumped water, wherein the flow channel comprises an inlet section, an intermediate section and an outlet section, wherein the pumped water enters the at least one diffuser through the inlet section, flows through the intermediate section along a flow direction and exits the at least one diffuser through the outlet section, wherein a recess is formed in the intermediate section at a bottom wall of the flow channel, wherein the recess extends over a first width of the flow channel between two side walls of the flow channel, wherein downstream of the recess in the outlet section an elevation of the bottom wall is formed in the flow channel, wherein the elevation is adapted to dam up the pumped water and allow the pumped water to flow over the elevation along a second width of the flow channel between the two side walls of the flow channel.

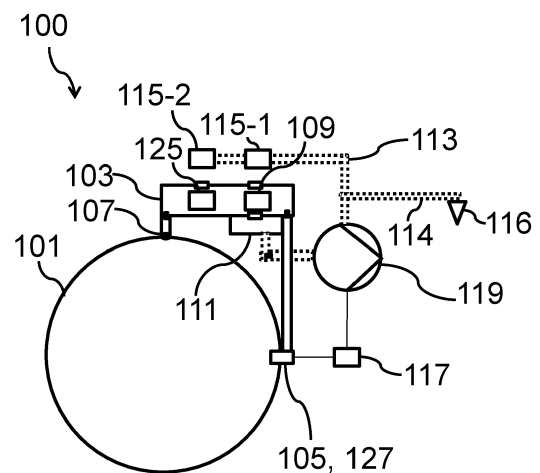


Fig. 1

EP 4 575 076 A1

Description

[0001] The present disclosure relates to a laundry device comprising a diffuser, in particular to a dryer or wash-dryer comprising a diffuser.

BACKGROUND

[0002] In conventional laundry devices, such as dryers or wash-dryers, wet laundry is introduced into a laundry drum. During a drying process, liquid content of the wet laundry has to be reduced, for example, by removing liquid from the laundry. Typically, in conventional laundry devices, in particular in conventional laundry devices with a heat pump, an evaporator of a heat exchange mechanism is provided to reduce the humidity of air circulating in the drying process. During the drying process, impurities of the laundry, such as fluff, can be accommodated in the circulating air and can accumulate on the evaporator, thereby reducing the efficiency of the heat exchange mechanism and the drying process of the laundry.

SUMMARY

[0003] It is therefore an object of the present disclosure to provide a laundry device, in particular a dryer or wash-dryer, which allows efficient drying of laundry.

[0004] This object is achieved by way of the features of the independent patent claim. Advantageous developments are the subject matter of the dependent claims, the description, and the appended figures.

[0005] According to a first aspect, the present disclosure relates to a laundry device, wherein the laundry device comprises a drying chamber for drying laundry and an air channel, wherein the air channel is connected with the drying chamber via an air inlet and an air outlet, wherein the air inlet is configured to feed air from the drying chamber into the air channel, wherein the air outlet is configured to feed the air from the air channel back into the drying chamber, wherein an evaporator is arranged downstream of the air inlet in the air channel, wherein the evaporator is configured to cool down the air supplied by the air inlet to condense water at the evaporator during cooling of the air, wherein impurities, in particular fluff, in the air are deposited at the evaporator, wherein the laundry device comprises a collection container arranged below the evaporator, wherein the collection container is configured to collect the condensed water of the evaporator, wherein the collection container is fluidly connected via a pumping line with at least one fluid diffuser, which is arranged above the evaporator, wherein the laundry device comprises a pump configured to pump the water collected in the collection container via the pumping line into the at least one fluid diffuser, wherein the at least one fluid diffuser is configured to feed the pumped water onto the evaporator to flush the impurities, in particular the fluff, from the evaporator into the collection container, wherein the at least one fluid diffuser

comprises an inner flow channel for conducting the pumped water, wherein the flow channel comprises an inlet section, an intermediate section and an outlet section, wherein the pumped water enters the at least one diffuser through the inlet section, flows through the intermediate section along a flow direction and exits the at least one diffuser through the outlet section, wherein a recess is formed in the intermediate section at a bottom wall of the flow channel, wherein the recess extends over a first width of the flow channel between two side walls of the flow channel, wherein downstream of the recess in the outlet section an elevation of the bottom wall is formed in the flow channel, wherein the elevation is adapted to dam up the pumped water and allow the pumped water to flow over the elevation along a second width of the flow channel between the two side walls of the flow channel.

[0006] As a result, the pumped water can be distributed evenly along the second width of the flow channel at the elevation and can evenly flow over the elevation. Therefore, the impurities, in particular the fluff, can be flushed efficiently from the evaporator into the collection container.

[0007] A control of the laundry device may be configured to switch a vent of the pump-out line and activate the pump to pump water together with the impurities, in particular the fluff, out of the collection container through the pump-out line.

[0008] The laundry device according to the present disclosure in particular refers to a laundry device which is adapted to dry laundry, in particular by thereby removing or at least significantly reducing the amount of water attached to the laundry. In particular, the laundry device according to the present disclosure is a dryer, which is adapted to dry laundry. More particular, the laundry device according to the present disclosure is a heatpump tumble dryer.

[0009] According to an embodiment, a fan is arranged in the air channel, which is configured to feed the air from the air inlet into the air channel and out of the air outlet.

[0010] As a result, the air can be efficiently fed through the air channel. The fan may be arranged in the air inlet.

[0011] According to an embodiment, the evaporator is arranged in a heat cycle of a heat pump, wherein a cooling means is circulating in the heat cycle of the heat pump, which cooling means is configured to cool down the evaporator.

[0012] As a result, the evaporator can be efficiently operated. The heat cycle may further comprise a condenser for heating air, a compressor for increasing the temperature and the pressure of the cooling means and an expansion valve for reducing the temperature and the pressure of the cooling means. The expansion valve may be arranged downstream of the condenser in the heat cycle. The evaporator may be arranged downstream of the expansion valve in the heat cycle. The compressor may be arranged downstream of the evaporator in the heat cycle. The condenser may be arranged downstream of the compressor in the heat cycle.

[0013] According to an embodiment, the at least one fluid diffuser comprises a first fluid diffuser arranged above a section of the evaporator and a further first fluid diffuser arranged above a further section of the evaporator, wherein the first fluid diffuser is configured to feed the pumped water onto the section of the evaporator to flush the impurities, in particular the fluff, from the section of the evaporator into the collection container, wherein the further first fluid diffuser is configured to feed the pumped water onto the further section of the evaporator to flush the impurities, in particular the fluff, from the further section of the evaporator into the collection container, wherein a first valve is arranged in the pumping line, wherein the pumping line is connected to the first fluid diffuser in a first state of the first valve and wherein the pumping line is connected to the further first fluid diffuser in a second state of the first valve.

[0014] As a result, more effective evaporators, i.e. evaporators with greater dimensions, can be efficiently used in the laundry device. The first valve may be controlled by a control of the laundry device in order to flush a different section of the evaporator.

[0015] According to an embodiment, the at least one fluid diffuser comprises a first fluid diffuser arranged above the evaporator and configured to feed the pumped water onto the evaporator to flush the impurities, in particular the fluff, from the evaporator into the collection container, wherein a condenser is arranged in the air channel downstream of the evaporator, wherein the condenser is configured to heat the air cooled by the evaporator, wherein further impurities, in particular further fluff, of the air are deposited at the condenser, wherein the collection container is arranged below the evaporator and the condenser, wherein the at least one fluid diffuser comprises a second fluid diffuser arranged above the condenser and configured to feed the pumped water onto the condenser to flush the further impurities, in particular further fluff, from the condenser into the collection container.

[0016] As a result, the efficiency of the condenser can be increased as well by cleaning it from the further impurities, in particular the further fluff. A valve may be controlled by a control of the laundry device in order to switch between flushing the condenser and flushing the evaporator.

[0017] According to an embodiment, the condenser is arranged in a heat cycle of a heat pump, wherein a cooling means is circulating in the heat cycle of the heat pump, which cooling means is configured to heat the condenser.

[0018] As a result, the condenser can be efficiently operated. The heat cycle may further comprise a compressor for increasing the temperature and the pressure of the cooling means and an expansion valve for reducing the temperature and the pressure of the cooling means. The expansion valve may be arranged downstream of the condenser in the heat cycle. The evaporator may be arranged downstream of the expansion valve in the heat

cycle. The compressor may be arranged downstream of the evaporator in the heat cycle. The condenser may be arranged downstream of the compressor in the heat cycle.

[0019] According to an embodiment, the at least one fluid diffuser comprises a second fluid diffuser arranged above a section of the condenser and a further second fluid diffuser arranged above a further section of the condenser, wherein the second fluid diffuser is configured to feed the pumped water onto the section of the condenser to flush the impurities, in particular the fluff, from the section of the condenser into the collection container, wherein the further second fluid diffuser is configured to feed the pumped water onto the further section of the condenser to flush the impurities, in particular the fluff, from the further section of the condenser into the collection container, wherein a second valve is arranged in the pumping line, wherein the pumping line is connected to the second fluid diffuser in a first state of the second valve and wherein the pumping line is connected to the further second fluid diffuser in a second state of the second valve.

[0020] As a result, more effective condensers, i.e. condensers with greater dimensions, can be efficiently used in the laundry device. The second valve may be controlled by a control of the laundry device in order to flush a different section of the condenser.

[0021] According to an embodiment, the first width of the flow channel is smaller than the second width of the flow channel, in particular wherein a width of the flow channel is continuously increasing from the first width along the flow direction to the second width.

[0022] As a result, the pumped water can efficiently flow in the flow channel from the first width to the second width along the flow direction.

[0023] According to an embodiment, the flow channel has a third width at the inlet section between the two side walls of the flow channel, wherein the third width is smaller than the first width, in particular wherein a width of the flow channel is continuously increasing from the third width along the flow direction to the first width.

[0024] As a result, the pumped water can efficiently flow in the flow channel from the third width to the first width along the flow direction.

[0025] According to an embodiment, the flow channel has a first height at the inlet section between the bottom wall of the flow channel and a top wall of the flow channel, wherein the flow channel has a second height in the intermediate section of the flow channel upstream of the recess between the bottom wall of the flow channel and the top wall of the flow channel, wherein the second height of the flow channel is smaller than the first height of the flow channel, in particular wherein a height of the flow channel is continuously decreasing from the first height along the flow direction to the second height.

[0026] As a result, the pumped water can efficiently flow in the flow channel from the first height to the second height along the flow direction. The first height may be a

maximum height of the inlet section between the bottom wall of the flow channel and the top wall of the flow channel. The second height may be a minimum height of the intermediate section upstream of the recess between the bottom wall of the flow channel and the top wall of the flow channel.

[0027] According to an embodiment, the flow channel has a second height in the intermediate section of the flow channel upstream of the recess between the bottom wall of the flow channel and the top wall of the flow channel, wherein the flow channel has a third height between a bottom wall of the recess and the top wall of the flow channel, wherein the second height of the flow channel is smaller than the third height of the flow channel, in particular wherein a height of the flow channel is continuously increasing from the second height along the flow direction to the third height.

[0028] As a result, the pumped water can efficiently flow in the flow channel from the second height to the third height along the flow direction. The second height may be a minimum height of the intermediate section upstream of the recess between the bottom wall of the flow channel and the top wall of the flow channel. The third height may be a maximum height between the bottom wall of the recess and the top wall of the flow channel.

[0029] According to an embodiment, a top wall of the flow channel is parallel to a bottom wall of the recess along a section of the intermediate section.

[0030] As a result, the pumped water can efficiently flow in the flow channel in the recess along the flow direction.

[0031] According to an embodiment, the flow channel has a fourth height at the elevation between the bottom wall of the flow channel and the top wall of the flow channel, wherein the flow channel has a third height between a bottom wall of the recess and the top wall of the flow channel, wherein the fourth height of the flow channel is smaller than the third height of the flow channel, in particular wherein a height of the flow channel is continuously decreasing from the third height along the flow direction to the fourth height.

[0032] As a result, the pumped water can efficiently flow in the flow channel from the third height to the fourth height along the flow direction. The third height may be a maximum height between the bottom wall of the recess and the top wall of the flow channel. The fourth height may be a minimum height of the outlet section at the elevation between the bottom wall of the flow channel and the top wall of the flow channel.

[0033] According to an embodiment, the outlet section comprises a water outlet channel extending downwards, wherein a width of the water outlet channel between two side walls of the flow channel at the outlet section corresponds to the second width of the flow channel.

[0034] As a result, the pumped water can efficiently flow through the outlet section in the flow channel and out of the at least one diffuser over the evaporator, and in particular the condenser.

[0035] According to an embodiment, the flow channel and the water outlet channel are arranged in an angle between 80° and 100°, in particular 90°, to each other and/or wherein the flow channel and the water outlet channel are connected by a rounded edge.

[0036] As a result, the pumped water can efficiently flow out of the outlet section of the flow channel. The rounded edge may be adjacent to the elevation, in particular the elevation may merge into the rounded edge.

[0037] According to an embodiment, the recess is formed as a concave recess in the flow channel.

[0038] As a result, the pumped water can efficiently flow in the flow channel in the recess along the flow direction.

[0039] According to an embodiment, the recess extends over the entire first width of the flow channel between the two side walls of the flow channel, and/or the elevation is adapted to allow the pumped water to flow over the elevation along the entire second width of the flow channel between the two side walls of the flow channel.

[0040] As a result, the pumped water can efficiently flow in the flow channel in the recess along the flow direction.

BRIEF DESCRIPTION OF THE DRAWINGS

[0041] Further examples of the principles and techniques of that disclosure are explained in greater detail with reference to the appended drawings, in which:

Fig. 1 shows a schematic representation of a laundry device according to an embodiment;

Fig. 2 shows a schematic representation of an air channel of a laundry device according to an embodiment;

Fig. 3a schematically shows a top view of a fluid diffuser of a laundry device according to an embodiment;

Fig. 3b schematically shows a 3D-view of the fluid diffuser shown in Fig. 3a;

Fig. 3c and 3d schematically shows cross section views of the fluid diffuser shown in Fig. 3a; and

Fig. 4 shows a diagram illustrating the water distribution of the water flowing through a diffuser at an outlet section of a laundry device according to an embodiment.

DETAILED DESCRIPTION OF THE DRAWINGS

[0042] Fig. 1 shows a schematic representation of a laundry device 100 according to an embodiment.

[0043] The laundry device 100, which is only schema-

tically shown in Fig. 1, comprises a schematically shown drying chamber 101 for drying laundry, which may be arranged in an interior space of the laundry device 100. During a drying program of the laundry device 100 for performing a laundry treatment process, wet laundry, which may be received in the drying chamber 101, may be treated and afterwards the treated laundry may be taken out by the user from the drying chamber 101. During the drying program, the laundry may give off moisture and impurities, in particular fluff, to the air in the drying chamber 101.

[0044] As further shown in Fig. 1, the laundry device 100 comprises an air channel 103. The air channel 103 is connected with the drying chamber 101 via an air inlet 105 and an air outlet 107. The air inlet 105 is configured to feed air from the drying chamber 101 into the air channel 103. The air outlet 107 is configured to feed the air from the air channel 103 back into the drying chamber 101. A fan 127 may be arranged in the air channel 103, which is configured to feed the air from the air inlet 105 into the air channel 103 and out of the air outlet 107.

[0045] An evaporator 109 is arranged downstream of the air inlet 105 in the air channel 103. The evaporator 109 may be arranged in a heat cycle of a heat pump, wherein a cooling means is circulating in the heat cycle of the heat pump, which cooling means is configured to cool down the evaporator 109. The evaporator 109 is configured to cool down the air supplied by the air inlet 105 to condense water at the evaporator 109 during cooling of the air. Impurities, in particular fluff, in the air are deposited at the evaporator 109.

[0046] The laundry device 100 comprises a collection container 111 arranged below the evaporator 109. The collection container 111 is configured to collect the condensed water of the evaporator 109. The collection container 111 is fluidly connected via a pumping line 113 with at least one fluid diffuser 115-1, 115-2, which is arranged above the evaporator 109.

[0047] The at least one fluid diffuser 115-1, 115-2 may comprise a first fluid diffuser 115-1 arranged above the evaporator 109 and configured to feed the pumped water onto the evaporator 109 to flush the impurities, in particular the fluff, from the evaporator 109 into the collection container 111.

[0048] A condenser 125 may be arranged in the air channel 103 downstream of the evaporator 109. The condenser 125 may be configured to heat the air cooled by the evaporator 109. Further impurities, in particular further fluff, of the air may be deposited at the condenser 125. The collection container 111 may be arranged below the evaporator 109 and the condenser 125. The at least one fluid diffuser 115-1, 115-2 may comprise a second fluid diffuser 115-2 arranged above the condenser 125 and configured to feed the pumped water onto the condenser 125 to flush the further impurities, in particular further fluff, from the condenser 125 into the collection container 111.

[0049] The condenser 125 may be arranged in the heat

cycle of the heat pump. The cooling means may be configured to heat the condenser 125.

[0050] The laundry device 100 comprises a pump 119 configured to pump the water collected in the collection container 111 via the pumping line 113 into the at least one fluid diffuser 115-1, 115-2. The at least one fluid diffuser 115-1, 115-2 is configured to feed the pumped water onto the evaporator 109 to flush the impurities, in particular the fluff, from the evaporator 109 into the collection container 111. A pump-out line 114 may be fluidly connected to the collection container 111 to remove water and the impurities, in particular the fluff, from the collection container 111 into a drain 116.

[0051] The laundry device 100 may comprise a control 117. During a drying program of the laundry device 100 or at the end of a drying program of the laundry device 100, the control 117 may be configured to activate the pump 119 to pump the water collected in the collection container 111 via the pumping line 113 into the at least one fluid diffuser 115-1, 115-2. The control 117 may be configured to activate the pump 119 to pump the water collected in the collection container 111 via the pumping line 113 into the at least one fluid diffuser 115-1, 115-2 when a moisture level of the laundry accommodated in the drying chamber 101 falls below a predetermined moisture level threshold during the drying program of the laundry device 100.

[0052] Fig. 2 shows a schematic representation of an air channel 103 of a laundry device 100 according to an embodiment. The laundry device 100 may be the laundry device 100 of Fig. 1. As described for Fig. 1, the laundry device 100 comprises a drying chamber 101, an evaporator 109, at least one fluid diffuser 115-1, an air inlet 105, an air outlet 107, a fan 127, a condenser 125, and a collection container 111.

[0053] Fig. 2 schematically shows an air flow direction 103-1 of the air in the air channel 103. Warm and wet air from the drying chamber 101 enters the air channel 103 through the air inlet 105, in which the fan 127 may be arranged and then passes the evaporator 109. At the evaporator 109 the air is cooled down and a moisture level of the air is reduced by condensation of water on the evaporator 109. Then the air passes the condenser 125 at which the air is heated again. The air then enters the drying chamber 101 through the air outlet 107 (not shown in Fig. 2).

[0054] As further shown in Fig. 2, the collection container 111 may be arranged below the evaporator 109 and the air channel 103 to collect the water condensed at the evaporator 109 and the pumped water flushed by the at least one diffuser 115-1. The collection container 111 may comprise openings 111-1 for passing the condensed water and the pumped water into the collection container 111.

[0055] Fig. 3a schematically shows a top view of a fluid diffuser 115-1, 115-2 of the laundry device 100 according to an embodiment. Fig. 3b schematically shows a 3D-view of the fluid diffuser 115-1, 115-2, and Fig. 3c and 3d

schematically show cross section views of the fluid diffuser 115-1, 115-2. The laundry device 100 may be the laundry device 100 of Fig. 1. In the following, the fluid diffuser 115-1, 115-2 is described with reference to the Figures 3a-3d.

[0056] The at least one fluid diffuser 115-1, 115-2 comprises an inner flow channel 121 for conducting the pumped water. The flow channel 121 comprises an inlet section 129, an intermediate section 131 and an outlet section 133. The pumped water enters the at least one diffuser 115-1, 115-2 through the inlet section 129, flows through the intermediate section 131 along a flow direction 121-1 and exits the at least one diffuser 115-1, 115-2 through the outlet section 133.

[0057] A recess 123 is formed in the intermediate section at a bottom wall 137 of the flow channel 121. The recess 123 extends over a first width 141, in particular the entire first width 141, of the flow channel 121 between two side walls 122-1, 122-2 of the flow channel 121.

[0058] A top wall 149 of the flow channel 121 may be parallel to a bottom wall of the recess 123 along a section of the intermediate section 131. Alternatively, the recess 123 may be formed as a concave recess in the flow channel 121.

[0059] Downstream of the recess 123 in the outlet section 133 an elevation 139 of the bottom wall 137 may be formed in the flow channel 121. The elevation 139 is adapted to dam up the pumped water and allow the pumped water to flow over the elevation 139 along a second width 143, in particular along the entire second width 143, of the flow channel 121 between the two side walls 122-1, 122-2 of the flow channel 121.

[0060] The flow channel 121 may have a third width 145 at the inlet section 129 between the two side walls 122-1, 122-2 of the flow channel 121. The third width 145 may be smaller than the first width 141, in particular a width of the flow channel 121 may be continuously increasing from the third width 145 along the flow direction 121-1 to the first width 141.

[0061] The first width 141 of the flow channel 121 may be smaller than the second width 143 of the flow channel 121, in particular a width of the flow channel 121 may be continuously increasing from the first width 141 along the flow direction 121-1 to the second width 143.

[0062] The flow channel 121 may have a first height 147 at the inlet section 129 between the bottom wall 137 of the flow channel 121 and a top wall 149 of the flow channel 121. The flow channel 121 may have a second height 151 in the intermediate section 131 of the flow channel upstream of the recess 123 between the bottom wall 137 of the flow channel 121 and the top wall 149 of the flow channel 121. The second height 151 of the flow channel 121 may be smaller than the first height 147 of the flow channel 121, in particular a height of the flow channel 121 may be continuously decreasing from the first height 147 along the flow direction 121-1 to the second height 151.

[0063] The flow channel 121 may have a third height 153 between a bottom wall 137 of the recess 123 and the top wall 149 of the flow channel 121. The second height 151 of the flow channel 121 may be smaller than the third height 153 of the flow channel 121, in particular the height of the flow channel 121 may be continuously increasing from the second height 151 along the flow direction 121-1 to the third height 153.

[0064] The flow channel 121 may have a fourth height 155 at the elevation 139 between the bottom wall 137 of the flow channel 121 and the top wall 149 of the flow channel 121. The fourth height 155 of the flow channel 121 may be smaller than the third height 153 of the flow channel 121, in particular a height of the flow channel 121 may be continuously decreasing from the third height 153 along the flow direction to the fourth height 155.

[0065] The outlet section 133 may comprise a water outlet channel 135 extending downwards. A width of the water outlet channel 135 between the two side walls of the flow channel 121 at the outlet section 133 may correspond to the second width 143 of the flow channel 121. The flow channel 121 and the water outlet channel 135 may be arranged in an angle between 80° and 100°, in particular 90°, to each other and/or the flow channel 121 and the water outlet channel 135 may be connected by a rounded edge.

[0066] Fig. 4 shows a diagram illustrating the water distribution of the water flowing through the at least one diffuser 115-1, 115-2 at the outlet section 133 (shown in Figures 3a-3d) of the laundry device 100 according to an embodiment. The abscissa shows different measurement points along the second width 143 (shown in Figures 3a-b) and the ordinate shows values of the waterflow in g/mm/30sec.

[0067] A first curve 157 shows the water distribution of a traditional diffuser. A second curve 159 shows a theoretical optimal water distribution. As can be seen by the comparison of the first curve 157 with the second curve 159, the traditional diffuser has an uneven water flow distribution, in particular at the outer measurement points near the side walls of the diffuser.

[0068] A third curve 161 shows the water distribution of the water flowing through the at least one diffuser 115-1, 115-2 at the outlet section 133 of the laundry device 100. As can be seen by the comparison of the third curve 161 with the second curve 159 and the first curve 157, the at least one diffuser 115-1, 115-2 has a more even water flow distribution in comparison with the traditional diffuser and is close to the theoretical optimal water distribution.

REFERENCE NUMBERS

[0069]

100	laundry device
101	drying chamber
103	air channel
103-1	air flow direction in the air channel

105	air inlet	
107	air outlet	
109	evaporator	
111	collection container	
111-1	openings	5
113	pumping line	
114	pump-out line	
115-1	first fluid diffuser	
115-2	second fluid diffuser	
116	drain	10
117	control	
119	pump	
121	flow channel	
121-1	flow direction in the flow channel	
122-1	first side wall	15
122-2	second side wall	
123	recess	
125	condenser	
127	fan	
129	inlet section	20
131	intermediate section	
133	outlet section	
135	water outlet channel	
137	bottom wall	
139	elevation	25
141	first width	
143	second width	
145	third width	
147	first height	
149	top wall	30
151	second height	
153	third height	
155	fourth height	
157	first curve	
159	second curve	35
161	third curve	

Claims

1. Laundry device (100), wherein the laundry device (100) comprises a drying chamber (101) for drying laundry and an air channel (103), wherein the air channel (103) is connected with the drying chamber (101) via an air inlet (105) and an air outlet (107), wherein the air inlet (105) is configured to feed air from the drying chamber (101) into the air channel (103), wherein the air outlet (107) is configured to feed the air from the air channel (103) back into the drying chamber (101), wherein an evaporator (109) is arranged downstream of the air inlet (105) in the air channel (103), wherein the evaporator (109) is configured to cool down the air supplied by the air inlet (105) to condense water at the evaporator (109) during cooling of the air, wherein impurities, in particular fluff, in the air are deposited at the evaporator (109), wherein the laundry device (100) comprises a collection container (111) arranged below the evaporator (109), wherein the collection container (111) is configured to collect the condensed water of the evaporator (109), wherein the collection container (111) is fluidly connected via a pumping line (113) with at least one fluid diffuser (115-1, 115-2), which is arranged above the evaporator (109), wherein the laundry device (100) comprises a pump (119) configured to pump the water collected in the collection container (111) via the pumping line (113) into the at least one fluid diffuser (115-1, 115-2), wherein the at least one fluid diffuser (115-1, 115-2) is configured to feed the pumped water onto the evaporator (109) to flush the impurities, in particular the fluff, from the evaporator (109) into the collection container (111), wherein the at least one fluid diffuser (115-1, 115-2) comprises an inner flow channel (121) for conducting the pumped water, wherein the flow channel (121) comprises an inlet section (129), an intermediate section (131) and an outlet section (133), wherein the pumped water enters the at least one diffuser (115-1, 115-2) through the inlet section (129), flows through the intermediate section (131) along a flow direction and exits the at least one diffuser (115-1, 115-2) through the outlet section (133), characterized in that a recess (123) is formed in the intermediate section at a bottom wall (137) of the flow channel (121), wherein the recess (123) extends over a first width (141) of the flow channel (121) between two side walls (122-1, 122-2) of the flow channel (121), wherein downstream of the recess (123) in the outlet section (133) an elevation (139) of the bottom wall (137) is formed in the flow channel (121), wherein the elevation (139) is adapted to dam up the pumped water and allow the pumped water to flow over the elevation (139) along a second width (143) of the flow channel (121) between the two side walls (122-1, 122-2) of the flow channel (121).
2. Laundry device (100) according to claim 1, wherein a fan (127) is arranged in the air channel (103), which is configured to feed the air from the air inlet (105) into the air channel (103) and out of the air outlet (107).
3. Laundry device (100) according to claim 1 or 2, wherein the evaporator (109) is arranged in a heat cycle of a heat pump, wherein a cooling means is circulating in the heat cycle of the heat pump, which cooling means is configured to cool down the evaporator (109).
4. Laundry device (100) according to any one of the preceding claims, wherein the at least one fluid diffuser (115-1, 115-2) comprises a first fluid

diffuser (115-1) arranged above the evaporator (109) and configured to feed the pumped water onto the evaporator (109) to flush the impurities, in particular the fluff, from the evaporator (109) into the collection container (111),

wherein a condenser (125) is arranged in the air channel (103) downstream of the evaporator (109), wherein the condenser (125) is configured to heat the air cooled by the evaporator (109), wherein further impurities, in particular further fluff, of the air are deposited at the condenser (125), wherein the collection container (111) is arranged below the evaporator (109) and the condenser (125), wherein the at least one fluid diffuser (115-1, 115-2) comprises a second fluid diffuser (115-2) arranged above the condenser (125) and configured to feed the pumped water onto the condenser (125) to flush the further impurities, in particular further fluff, from the condenser (125) into the collection container (111).

5. Laundry device (100) according to claim 4, wherein the condenser (125) is arranged in a heat cycle of a heat pump, wherein a cooling means is circulating in the heat cycle of the heat pump, which cooling means is configured to heat the condenser (125).
6. Laundry device according to any one of the preceding claims, wherein the first width (141) of the flow channel (121) is smaller than the second width (143) of the flow channel (121), in particular wherein a width of the flow channel (121) is continuously increasing from the first width (141) along the flow direction to the second width (143).
7. Laundry device according to any one of the preceding claims, wherein the flow channel (121) has a third width (145) at the inlet section (129) between the two side walls (122-1, 122-2) of the flow channel (121), wherein the third width (145) is smaller than the first width (141), in particular wherein a width of the flow channel (121) is continuously increasing from the third width (145) along the flow direction to the first width (141).
8. Laundry device according to any one of the preceding claims, wherein the flow channel (121) has a first height (147) at the inlet section (129) between the bottom wall (137) of the flow channel (121) and a top wall (149) of the flow channel (121), wherein the flow channel (121) has a second height (151) in the intermediate section (131) of the flow channel upstream of the recess (123) between the bottom wall (137) of the flow channel (121) and the top wall (149) of the flow channel (121), wherein the second height (151) of the flow channel (121) is smaller than the first height (147) of the flow channel (121), in particular wherein a height of the flow channel (121) is continuously decreasing from the first height (147) along

the flow direction to the second height (151).

9. Laundry device according to one of the preceding claims, wherein the flow channel (121) has a second height (151) in the intermediate section (131) of the flow channel upstream of the recess (123) between the bottom wall (137) of the flow channel (121) and the top wall (149) of the flow channel (121), wherein the flow channel (121) has a third height (153) between a bottom wall (137) of the recess (123) and the top wall (149) of the flow channel (121), wherein the second height (151) of the flow channel (121) is smaller than the third height (153) of the flow channel (121), in particular wherein a height of the flow channel (121) is continuously increasing from the second height (151) along the flow direction to the third height (153).
10. Laundry device according to any one of the preceding claims, wherein a top wall (149) of the flow channel (121) is parallel to a bottom wall of the recess (123) along a section of the intermediate section (131).
11. Laundry device according to any one of the preceding claims, wherein the flow channel (121) has a fourth height (155) at the elevation (139) between the bottom wall (137) of the flow channel (121) and the top wall (149) of the flow channel (121), wherein the flow channel (121) has a third height (153) between a bottom wall (137) of the recess (123) and the top wall (149) of the flow channel (121), wherein the fourth height (155) of the flow channel (121) is smaller than the third height (153) of the flow channel (121), in particular wherein a height of the flow channel (121) is continuously decreasing from the third height (153) along the flow direction to the fourth height (155).
12. Laundry device according to any one of the preceding claims, wherein the outlet section (133) comprises a water outlet channel (135) extending downwards, wherein a width of the water outlet channel (135) between two side walls (122-1, 122-2) of the flow channel (121) at the outlet section (133) corresponds to the second width (143) of the flow channel (121).
13. Laundry device according to claim 12, wherein the flow channel (121) and the water outlet channel (135) are arranged in an angle between 80° and 100°, in particular 90°, to each other and/or wherein the flow channel (121) and the water outlet channel (135) are connected by a rounded edge.
14. Laundry device according to any one of the preceding claims, wherein the recess (123) is formed as a concave recess in the flow channel (121).

15. Laundry device according to any one of the preceding claims, wherein the recess (123) extends over the entire first width (141) of the flow channel (121) between the two side walls (122-1, 122-2) of the flow channel (121), and/or wherein the elevation is adapted to allow the pumped water to flow over the elevation (139) along the entire second width (143) of the flow channel (121) between the two side walls (122-1, 122-2) of the flow channel (121).

10

15

20

25

30

35

40

45

50

55

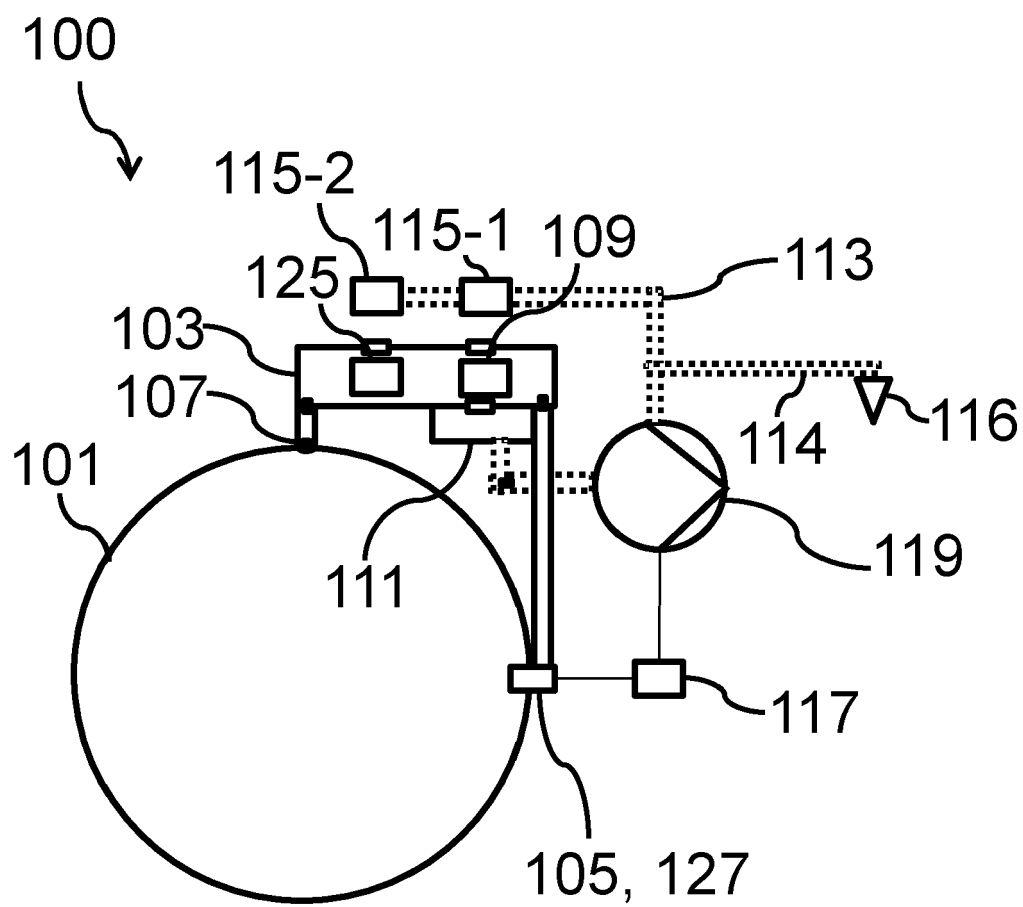


Fig. 1

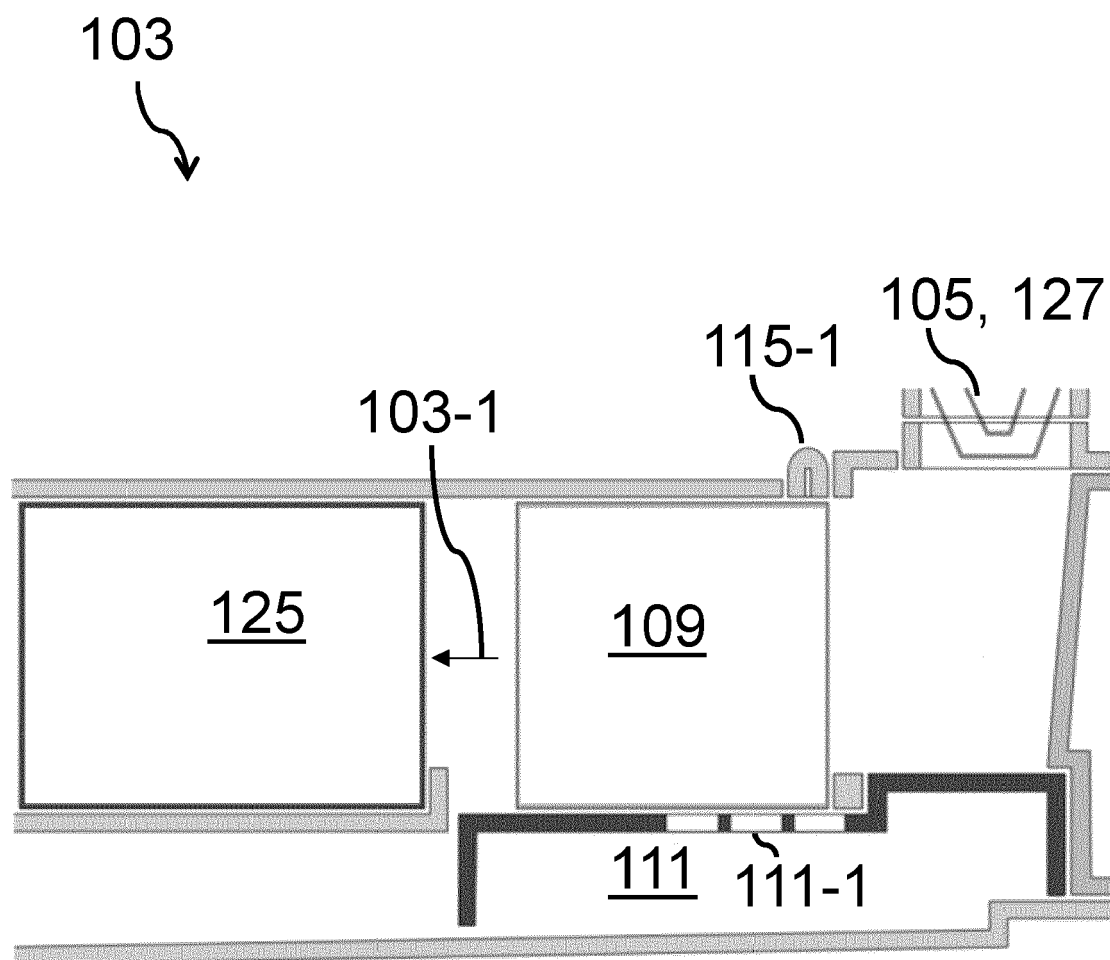


Fig. 2

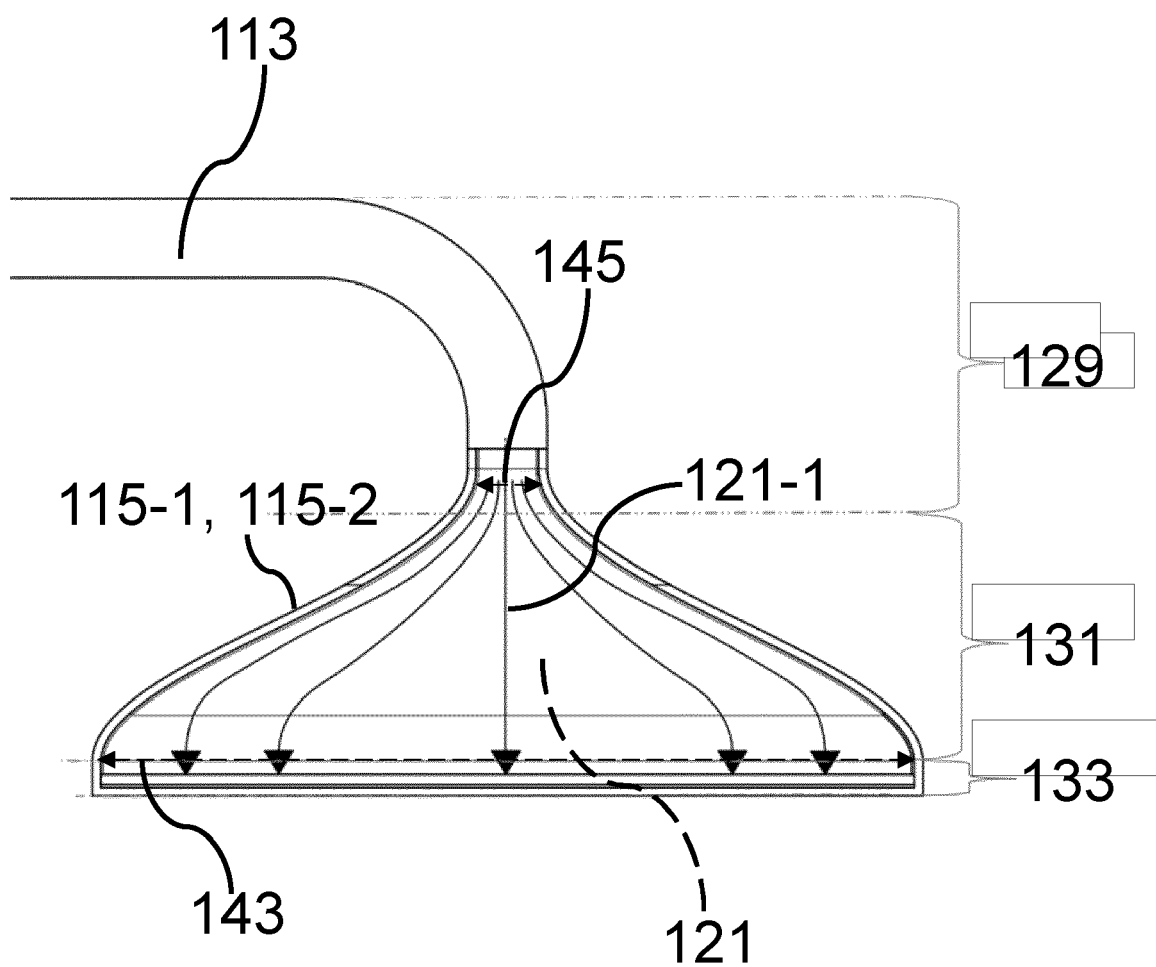


Fig. 3a

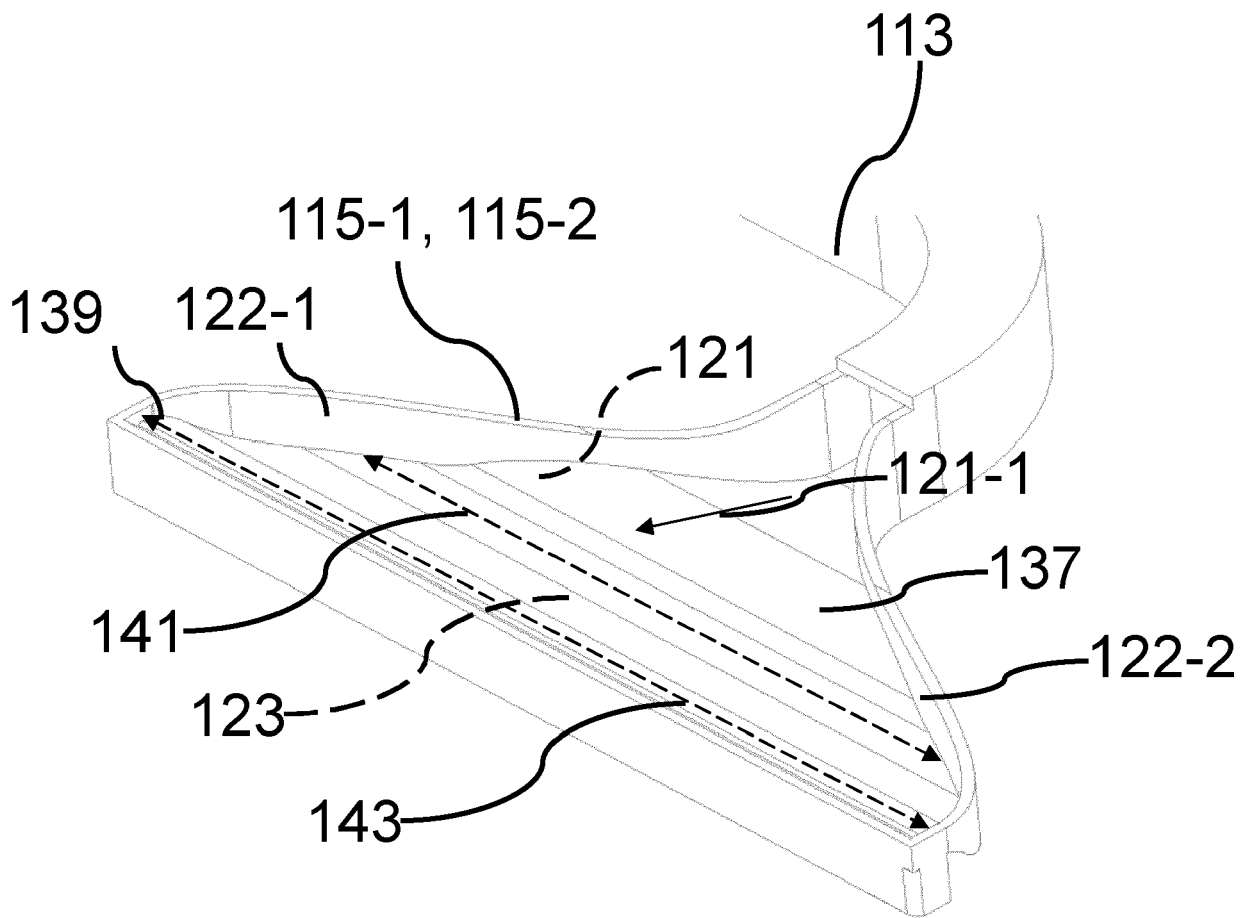


Fig. 3b

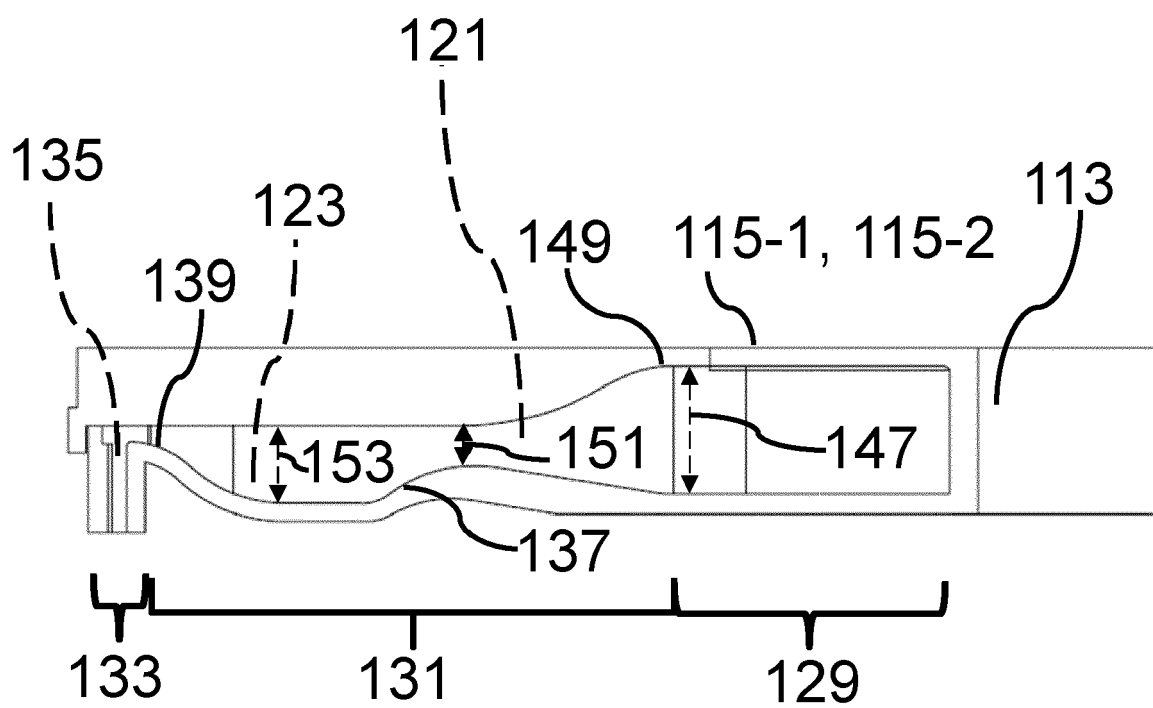


Fig. 3c

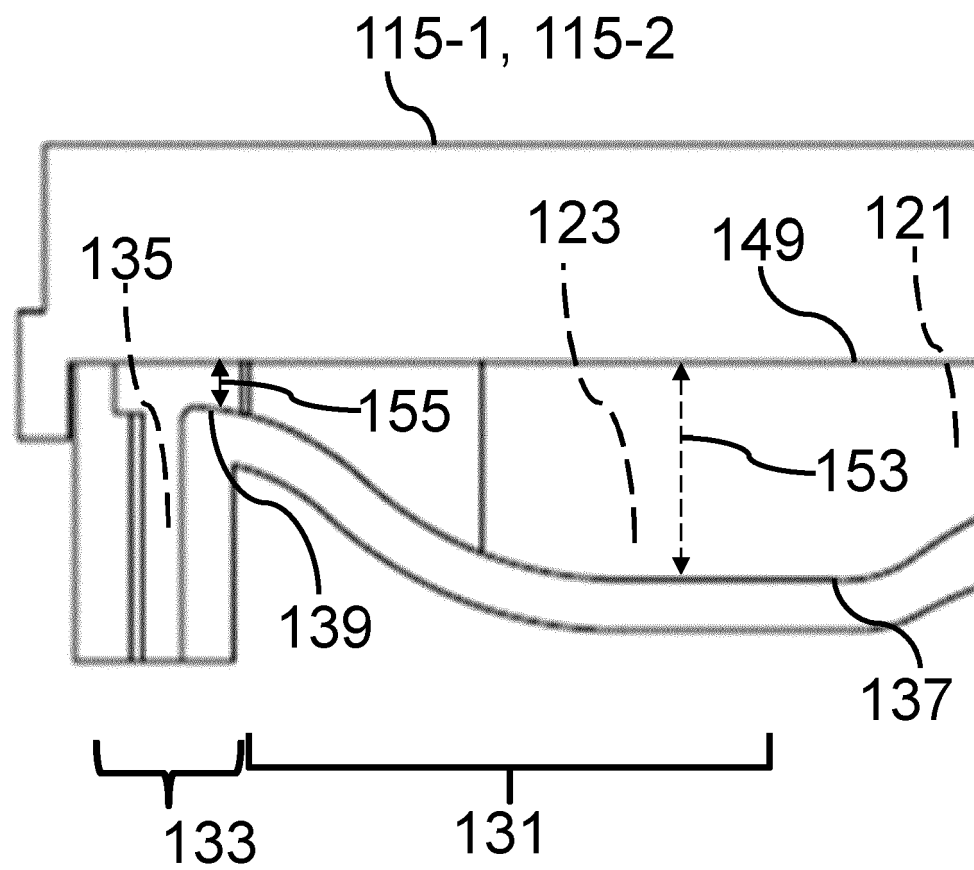


Fig. 3d

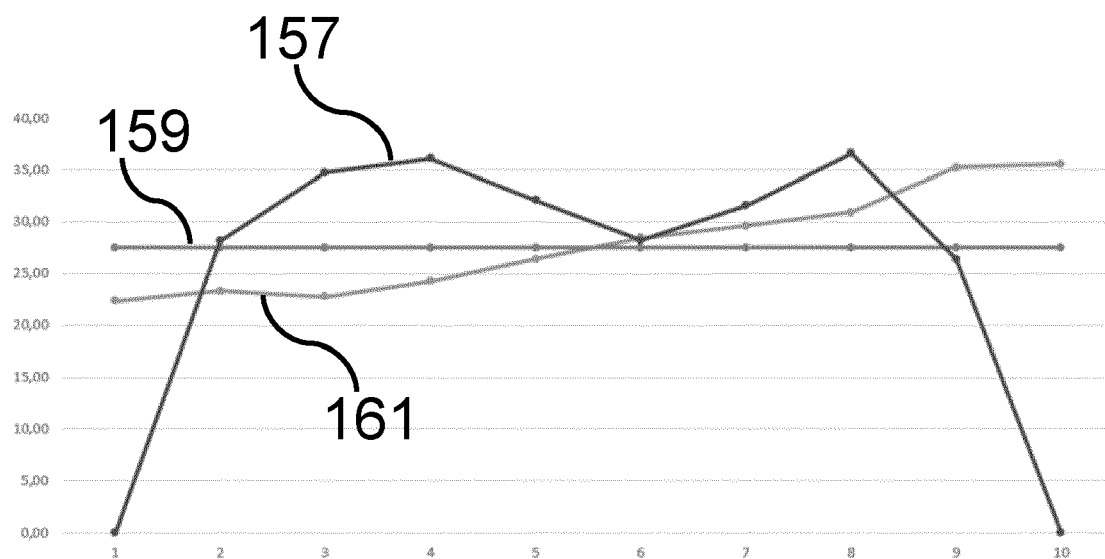


Fig. 4



EUROPEAN SEARCH REPORT

Application Number

EP 23 21 8517

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2022/025551 A1 (LG ELECTRONICS INC [KR]) 3 February 2022 (2022-02-03)	1-5, 12-15	INV. D06F58/24
A	* paragraph [0107] - paragraph [0108] * * paragraph [0116] - paragraph [0123]; figures 3, 4 * * paragraph [0136] - paragraph [0138] * * paragraph [0157] - paragraph [0161] * * paragraph [0188] - paragraph [0214]; figures 6a, 6b * * paragraph [0276] - paragraph [0286]; figure 11 *	6-11	ADD. D06F58/20
X	EP 3 725 939 A1 (ELECTROLUX HOME PRODUCTS CORP NV [BE]) 21 October 2020 (2020-10-21)	1-5, 12-15	
A	* paragraph [0003] * * paragraph [0054] - paragraph [0070] * * figures 1-17 *	6-11	
A	US 2019/024299 A1 (RYU MYUNG HEE [KR]) 24 January 2019 (2019-01-24)	1-15	TECHNICAL FIELDS SEARCHED (IPC)
	* paragraph [0062] * * paragraph [0066] * * paragraph [0071] - paragraph [0078] * * paragraph [0082] - paragraph [0083] * * paragraph [0088] - paragraph [0090] * * paragraph [0095] - paragraph [0114] * * figures 1-7 *		D06F
A	EP 2 691 567 B1 (LG ELECTRONICS INC [KR]) 23 November 2016 (2016-11-23)	1-15	
	* paragraph [0034] - paragraph [0039]; figures 1, 2 * * paragraph [0041] * * paragraph [0044] - paragraph [0045]; figure 3B * * paragraph [0058] - paragraph [0063]; figures 10, 11 *		
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 23 May 2024	Examiner Sabatucci, Arianna
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 23 21 8517

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-05-2024

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2022025551 A1	03-02-2022	KR 20220014623 A	07-02-2022
		WO 2022025551 A1	03-02-2022
EP 3725939 A1	21-10-2020	AU 2013314329 A1	12-03-2015
		CN 104619905 A	13-05-2015
		EP 2708639 A1	19-03-2014
		EP 2895651 A1	22-07-2015
		EP 3725939 A1	21-10-2020
		EP 3730690 A1	28-10-2020
		PL 2895651 T3	11-01-2021
		WO 2014041097 A1	20-03-2014
US 2019024299 A1	24-01-2019	CN 107923115 A	17-04-2018
		EP 3309291 A1	18-04-2018
		KR 20170028037 A	13-03-2017
		US 2019024299 A1	24-01-2019
		WO 2017039298 A1	09-03-2017
EP 2691567 B1	23-11-2016	AU 2012237107 A1	10-10-2013
		BR 112013024603 B1	01-12-2020
		CN 103547728 A	29-01-2014
		EP 2691567 A2	05-02-2014
		ES 2617216 T3	15-06-2017
		RU 2533712 C1	20-11-2014
		US 2012246960 A1	04-10-2012
		WO 2012134149 A2	04-10-2012

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82