

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 376 997 B2

(12)

NEW EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the opposition decision:
31.03.1999 Bulletin 1999/13

(45) Mention of the grant of the patent:
18.01.1995 Bulletin 1995/03

(21) Application number: **89904950.6**

(22) Date of filing: **07.04.1989**

(51) Int Cl.⁶: **C07C 69/76**, C07C 69/80,
C07C 69/82, C10M 105/36,
C10M 105/38, C10M 129/72,
C10M 129/74

(86) International application number:
PCT/US89/01454

(87) International publication number:
WO 89/10345 (02.11.1989 Gazette 1989/26)

(54) THERMAL OXIDATIVELY STABLE SYNTHETIC FLUID COMPOSITION

THERMISCH UND OXYDATIV STABILE SYNTHETISCHE FLUIDKOMPOSITION

COMPOSITION FLUIDE SYNTHETIQUE STABLE A LA CHALEUR ET A L'OXYDATION

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

(30) Priority: **18.04.1988 US 182544**

(43) Date of publication of application:
11.07.1990 Bulletin 1990/28

(73) Proprietor: **The Lubrizol Corporation**
Wickliffe, Ohio 44092 (US)

(72) Inventors:
• **LANGE, Richard, M.**
Euclid, OH 44123 (US)
• **SALOMON, Mary, F.**
Cleveland Heights, OH 44118 (US)

(74) Representative: **Crisp, David Norman et al**
D. YOUNG & CO.
21 New Fetter Lane
London EC4A 1DA (GB)

(56) References cited:
EP-A- 0 157 583 **DE-A- 1 955 473**
FR-A- 1 200 141 **FR-A- 1 242 842**
GB-A- 851 205 **US-A- 2 075 107**
US-A- 2 937 996 **US-A- 3 028 352**
US-A- 3 148 200 **US-A- 3 624 133**
US-A- 3 654 211 **US-A- 3 981 838**
US-A- 4 661 622

Remarks:

The file contains technical information submitted
after the application was filed and not included in this
specification

EP 0 376 997 B2

Description

[0001] This invention relates to aromatic carboxylic acid esters and to the use of such esters as novel thermally and oxidatively stable synthetic fluids. More particularly, the invention relates to their use in the field of thermal oxidatively stable synthetic fluid lubrication.

[0002] Many types of synthetic fluids useful as lubricating oils are available, including hydrogenated polyalpha-olefins, aliphatic esters of aliphatic dibasic acids, trimethylolpropane aliphatic esters, pentaerythritol aliphatic esters, silicones, silicate esters, and phosphate esters. For a detailed discussion, see R. C. Gunderson and A. W. Hart, editors, "Synthetic Lubricants", (1962). These fluids were developed as improvements over refined mineral oils, adding such benefits as improved thermal stability, improved oxidative stability, superior volatility characteristics, better viscosity/temperature characteristics, and improved frictional properties. The use of synthetic lubricants has expanded considerably in recent years. New applications for synthetic fluids bring new demands for performance. Changes in lubricated equipment design and operating temperatures impose further requirements for upgraded fluid performance.

[0003] U.S. Patent 3,947,369 (Liebfried, March 30, 1976) discloses a synthetic oil useful as a base stock for jet engine lubricating oils. In summary, the patent describes a lubricating oil base stock, which meets both the 210°F (99°C) initial viscosity requirement, and the 72 hour no-freeze requirement. The base stock is composed of a blend of (1) a pentaerythritol ester product consisting essentially of pentaerythritol material completely esterified by straight chain C₄-C₁₀ alkanolic acid material, and (2) trimellitate ester product consisting essentially of trimellitic acid completely esterified by C₄-C₁₃ alkanol material. The weight ratio of trimellitate ester product to the pentaerythritol ester product in the blend is generally in the range from about 1:10 to about 1:1.

[0004] U.S. Patent 3,974,081 (Rutkowski et al, August 10, 1976) relates to an improved lubricating fluid and particularly concerns an additive for such a fluid that will improve its seal swelling properties without at the same time imparting any detrimental effects thereto. The invention is also directed to additive concentrate packages that are intended for formulation into mineral oil base stocks to provide transmission fluids of improved seal swelling characteristics thereby enhancing fluid retention. These transmission fluids have utility as a lubricant for rotary engines. The additive is an oil soluble, saturated, aliphatic or aromatic hydrocarbon ester having from 10 to 60 carbon atoms and from 2 to 4 ester linkages. For some applications it is desired that an aliphatic alcohol having from 8 to 13 carbon atoms be present in up to equal amount with said ester as a co-swellant. Preferred among the above class of esters is dihexyl phthalate and among the above class of alcohols is tridecyl alcohol.

[0005] U.S. Patent 4,157,990 (Linder et al, June 12, 1979) refers to the development of lubricant and detackifying compositions with a content of

A. mixed esters with hydroxyl and acid numbers of 0 to 6 of


- (a) aliphatic, cycloaliphatic and/or aromatic dicarboxylic acids,
- (b) aliphatic polyols,
- (c) aliphatic monocarboxylic acids with 12 to 30 carbon atoms in the molecule, and

B. esters from long-chain aliphatic monofunctional alcohols with 32 to 72 carbon atoms in the molecule and long-chain monocarboxylic acids with 18 to 72 carbon atoms in the molecule, where the weight ratio by weight of mixed esters (A) to esters (B) is 9:1 to 1:3.

[0006] G.B. Patent 851,205 relates to alcohol esters of aromatic tetracarboxylic acids suitable for use as lubricating oils.


[0007] EP-A3-0 157 583 also relates to oil-based lubricant compositions comprising esters of aromatic polycarboxylic acids.

[0008] The present invention provides an aromatic carboxylic acid ester of the general formula

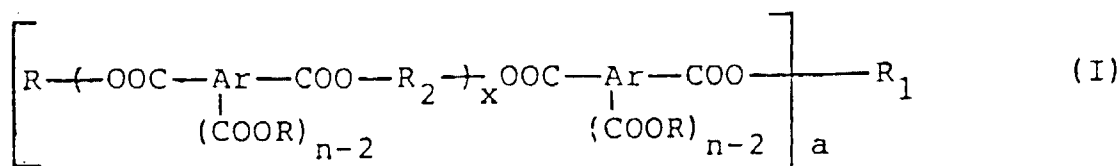


wherein Ar is an aromatic moiety, R is a neo hydrocarbyl group containing from 5 to 18 carbon atoms, with the proviso that R is not a cycloalkyl substituted neo hydrocarbyl group, R₁ is a mono, di, tri or tetravalent neo hydrocarbyl group

containing from 5 to 18 carbon atoms, n is an integer from 2 to 4 and represents the total number of carboxylic acid ester groups on the aromatic moiety, R₂ is a hydrocarbonyl group derived from a diol containing from 2 to 18 carbon atoms; x is an integer from 0 to 4, and a is an integer from 1 to 4, and when a is 1, R₁ is monovalent; when a is 2, R₁ is divalent; when a is 3, R₁ is trivalent and derived from a triol of formula



wherein R₆ is a hydrocarbonyl group containing from 1 to 14 carbon atoms; and when a is 4, R₁ is tetravalent and derived from a tetraol of formula

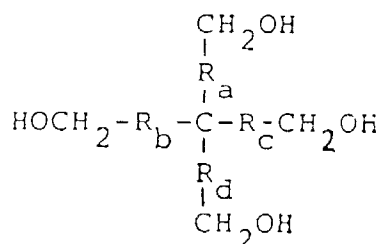

wherein R_a, R_b, R_c and R_d may be the same or different and are hydrocarbonyl groups containing from zero up to 3 carbon atoms, and when the hydrocarbonyl groups R_a, R_b, R_c and R_d contain no carbon atoms, R₁ is derived from pentaerythritol; with the proviso that when Ar is a single ring, a is 1 and x is 0, n is an integer other than 4.

[0009] A primary aim of this invention is to provide a novel thermally and oxidatively stable synthetic fluid composition comprising an aromatic carboxylic acid ester.


[0010] A feature of the invention is that the aromatic carboxylic acid esters which function in the novel thermally and oxidatively stable synthetic fluid composition can be easily and economically manufactured. An advantage of the present composition is that the aromatic carboxylic acid esters provide lubricating properties which are desirable for synthetic fluid compositions.

[0011] Various preferred features and embodiments of the present invention will now be described.

[0012] The thermal stability of a chemical compound is its resistance to change brought about solely by thermal energy. The rate of thermal decomposition as a function of temperature precisely defines this property.

[0013] In this jet and space age more and more emphasis is on thermal stability. Higher operating temperatures, for increased engine efficiency, require more thermally stable lubricants. For lubricants and hydraulic fluids it is apparent that other properties such as viscosity, pour point, oxidative stability and vapor pressure are quite important, but such properties are more amenable to improvement by additives and minor structural modifications than is thermal stability.

[0014] Applicants have discovered that certain aromatic carboxylic acid esters possess a high degree of thermal and oxidative stability. The aromatic carboxylic acid esters which are used in the composition in accordance with the present invention are compounds characterized by the structural formula:

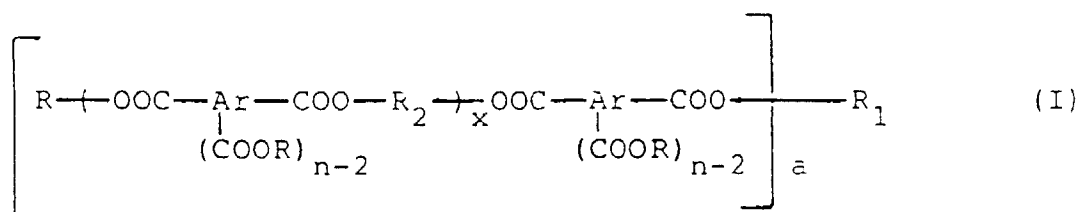

wherein R, R₁, R₂, Ar, n, x and a are as defined previously for formula (I).

[0015] The aromatic carboxylic acid ester is prepared by reacting an alcohol with an aromatic acid or anhydride, or their esters (as in transesterification). However, in order to force the esterification reaction to completion, an excess of

the alcohol is employed. Normally, the total amount of alcohol is present in a 100% excess on an equivalent basis. Preferably, the alcohol is present in a 50% excess. The unreacted alcohol may be removed by distillation after the esterification reaction is complete and reused in future esterification reactions.

[0016] Normally, the alcohol and aromatic acid or anhydride are added to a reaction vessel at room temperature. Stirring is begun and an acid catalyst is added to promote the reaction. Catalysts that can be used in the practice of this invention are methanesulfonic acid, para-toluenesulfonic acid and tetraalkyl titanates. The catalyst of choice is para-toluene sulfonic acid. Upon completion of the esterification, the catalyst is neutralized with an appropriate base, such as aqueous sodium hydroxide or calcium hydroxide.

[0017] As used in this specification and appended claims, the term "hydrocarbyl" denotes a group having a carbon atom directly attached to the remainder of the molecule and having predominantly hydrocarbon character within the context of this invention. Such groups include the following:

(1) Hydrocarbon groups; that is, aliphatic (e.g., alkyl, aromatic, aliphatic-substituted aromatic, aromatic-substituted aliphatic and alicyclic groups, and the like. Typical hydrocarbon groups are known to those skilled in the art. These hydrocarbon groups may be monovalent, as well as di-, tri- or tetravalent. That is, there may be one or more points of attachment of the hydrocarbon groups to carboxy groups within the same complex ester molecule. Examples include octyl, decyl, octadecyl, propylene, butylene, butanetriyl, pentanetriyl, the tetra valent moiety derived from pentaerythritol, etc.

(2) Hetero groups; that is, groups which, while predominantly hydrocarbon in character within the context of this invention, contain atoms other than carbon in a chain or ring otherwise composed of carbon atoms. Suitable heteroatoms will be apparent to those skilled in the art and include, for example, nitrogen, oxygen and sulfur.


[0018] In general, no more than about three substituents or heteroatoms, and preferably no more than one, will be present for every 10 carbon atoms in the hydrocarbyl group.

The Aromatic Moiety, Ar


[0019] The aromatic moiety, Ar, can be a single aromatic nucleus such as a benzene nucleus or a polynuclear aromatic moiety. Such polynuclear moieties can be of the fused type; that is, wherein at least two aromatic nuclei are fused at two points to another nucleus such as found in naphthalene, anthracene, etc. Such aromatic moieties also can be of the linked type wherein at least two nuclei are linked through bridging linkages to each other. Such bridging linkages can be chosen from

carbon-to-carbon single bonds, ether linkages, keto linkages, alkylene linkages, and mixtures of such divalent bridging linkages.


[0020] The aromatic moiety Ar in all cases is derived from aromatic carboxylic acids, aromatic anhydrides and aromatic esters. Specific examples of compounds of formula (I) containing single ring Ar moieties are the following wherein R_1 and a are as previously defined:

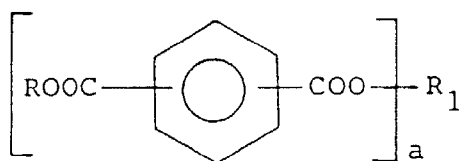

where $n = 2$,
 $x = 0$

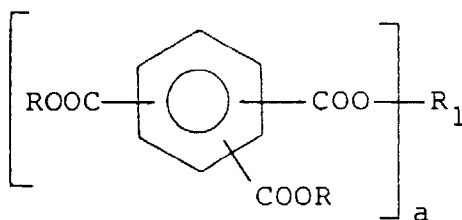


where $n = 3$,
 $x = 0$

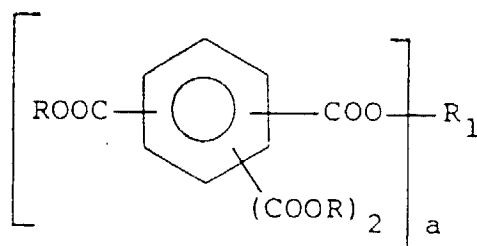


where $n = 4$,
 $x = 0$


[0021] Specific examples of compounds of formula (I) containing fused ring aromatic moieties Ar are:

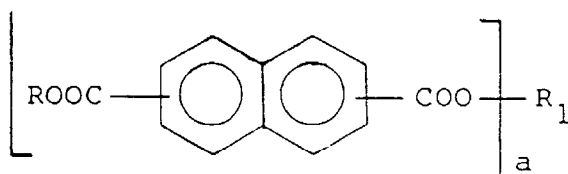

where $n = 2$,
 $x = 0$


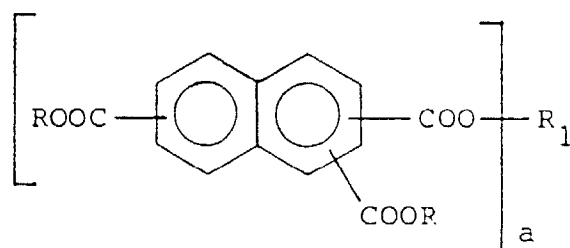


where $n = 3$,
 $x = 0$

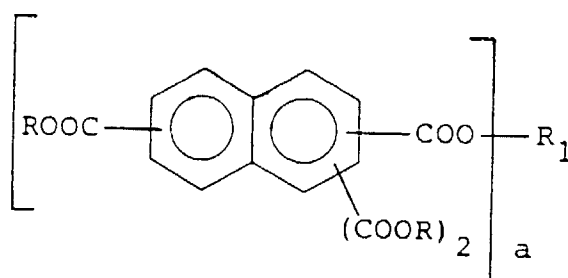


where $n = 4$,
 $x = 0$

[0022] Examples of compounds of formula (I) wherein Ar is a linked polynuclear aromatic moiety include:

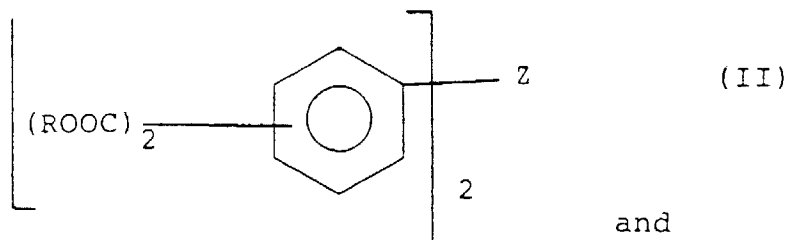

wherein Z is selected from




and -O-; where $n = 4$; $a = 1$; $x = 0$ and $R_1 = R$

[0023] Usually, all of these carboxylic acid bearing Ar moieties are otherwise unsubstituted except for stable hydrocarbyl groups, hydrocarbylene groups and any bridging groups.

[0024] Suitable aromatic carboxylic acids which may be used to prepare the products of this invention are represented by the formula $\text{Ar}-(\text{COOH})_n$ where Ar is an aromatic moiety and n is an integer from 2 to 4. Aromatic carboxylic acids falling within the parameters of the above structure include phthalic acid, isophthalic acid, terephthalic acid, hemimellitic acid, trimellitic acid, pyromellitic acid, trimesic acid, naphthalene 1,8-dicarboxylic acid, naphthalene 2,3-dicarboxylic acid, naphthalene-1,4-dicarboxylic acid, naphthalene 2,6-dicarboxylic acid and naphthalene 2,3,6-tricarboxylic acid.

[0025] Anhydrides corresponding to any of the above aromatic carboxylic acids may also be used to prepare the products of the present invention. Anhydrides are represented by the formula



wherein Ar is as defined above and z is an integer from 1 to 3, preferably 1 to 2. Suitable anhydrides are phthalic anhydride, 1,8-naphthalic anhydride, 2,3-naphthalic anhydride, 2,3,7,8-naphthalic dianhydride, trimellitic anhydride, pyromellitic anhydride, mellitic anhydride and benzophenonetetracarboxylic acid dianhydride.

[0026] Aromatic carboxylic acid esters which may be used to prepare the products of this invention by transesterification are represented by the formula




wherein Ar and n are defined above and R_7 is a hydrocarbyl group containing from 1 to 6 carbon atoms. Aromatic

esters that can be employed in this invention are dimethyl phthalate, trimethyl trimellitate, diethyl phthalate and dimethyl naphthalene-2,6-dicarboxylate.

[0027] For such reasons as cost, availability, performance, etc., the Ar moiety is normally a benzene nucleus, keto-bridged benzene nuclei or a naphthalene nucleus.

The Neo Hydrocarbyl Group R

[0028] The neo hydrocarbyl group R is an aliphatic group. The neo hydrocarbyl group R contains from 5 to 18 carbon atoms with the proviso that R is a neo hydrocarbyl group other than a cycloalkyl substituted neo hydrocarbyl group. The neo hydrocarbyl group R has the structure:



wherein R_2 , R_3 and R_4 are independently straight chain hydrocarbyl groups, branched chain hydrocarbyl groups or mixtures thereof. Preferably, the neo hydrocarbyl group contains from 8 to 16 carbon atoms, and most preferably the neo hydrocarbyl group is a neo octyl group. In all cases, the hydrocarbyl group is usually derived from an alcohol.

[0029] Specific examples of hydrocarbyl groups of R_2 , R_3 and R_4 include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, sec-butyl and t-butyl. Non-limiting examples of neo alcohols that may be employed in the practice of this invention are: 2,2-dimethyl-1-heptanol, 2,2-di-methyl-1-octanol, 2-methyl-2-ethyl-1-pentanol, 2-methyl-2-ethyl-1-hexanol, 2-methyl-2-ethyl-1-heptanol, 2-methyl-2-ethyl-1-octanol, 2,2-diethyl-1-butanol, 2,2-diethyl-1-pentanol, 2,2-diethyl-1-hexanol, 2,2-diethyl-1-heptanol, 2,2-diethyl-1-octanol, 2,2,3-trimethyl-1-pentanol, 2,2,3-trimethyl-1-hexanol, 2,2,3-trimethyl-1-heptanol, 2,2,3-trimethyl-1-octanol, 2,3-dimethyl-2-ethyl-1-butanol, 2,2,4-trimethyl-1-pentanol, 2,2,4-trimethyl-1-hexanol, 2,2,4-trimethyl-1-heptanol, 2,2,4-trimethyl-1-octanol, 2,2,3,3-tetramethyl-1-butanol and 2,2,4-trimethyl-1-pentanol.

The Neo Hydrocarbyl Group R_1

[0030] The hydrocarbyl group R_1 is a mono, di, tri or tetra valent neo hydrocarbyl group containing from 5 to 18 carbon atoms, preferably from 5 to 16 carbon atoms and most preferably from 5 to 12 carbon atoms.


[0031] The neo hydrocarbyl group R_1 is derived from an alcohol containing from 1 to 4 hydroxyl groups and may be represented as $R_1(-OH)_a$ wherein a is from 1 to 4.

[0032] When a is 1, R_1 is derived from a neo alcohol as described.

[0033] An example of a preferred branched chain monohydric alcohol suitable for use in the present invention is commercial tridecyl alcohol, a mixture of isomers in the C_{13} range prepared by the Oxo process and which is available from Exxon Corporation.


[0034] When a is 2, R_1 is derived from a diol. Suitable examples of $R_1(-OH)_2$ are 2,2-dimethyl-1,3-propanediol; 2,2,4,4-tetramethyl-1,5-pentanediol; 2,2,5,5-tetramethyl-1,6-hexanediol; 2,2,6,6-tetramethyl-1,7-heptanediol; 2,2,7,7-tetramethyl-1,8-octanediol.

[0035] When a is 3, R_1 is derived from a triol. The triol $R_1(-OH)_3$ is represented by the formula




wherein R_6 is a hydrocarbyl group containing from 1 to 14 carbon atoms, preferably 1 to 10 carbon atoms, and most preferably 1 to 6 carbon atoms. Suitable examples of this structure are trimethylolpropane, trimethylolbutane, trimethylolpentane, etc.

[0036] When a is 4, R_1 is derived from a tetraol represented by the structure:

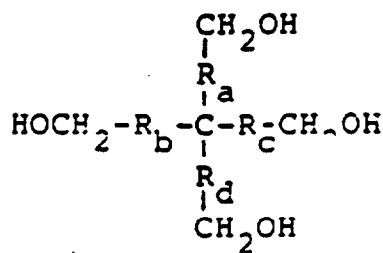


wherein R_a , R_b , R_c and R_d may be the same or different and are hydrocarbyl groups containing from zero up to 3 carbon atoms. When the hydrocarbyl groups R_a , R_b , R_c and R_d contain no carbon atoms, R_1 is derived from pentaerythritol.

[0037] A preferred embodiment of this invention comprises an aromatic carboxylic acid ester of the general formula

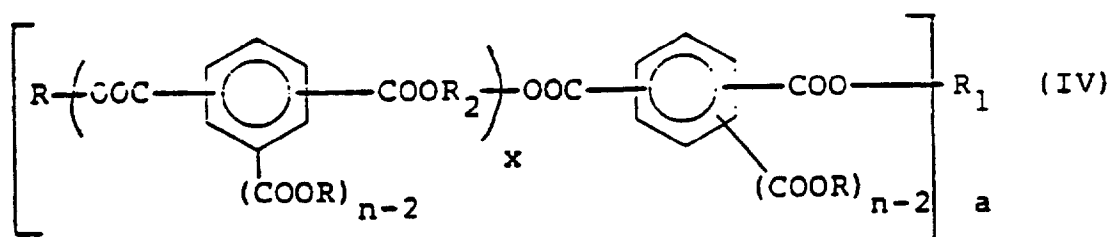


wherein n , R_2 and x are as defined above in formula (I), R is a neo hydrocarbyl group containing from 5 to 10 carbon atoms, R_1 is a di, tri or tetravalent neo hydrocarbyl group as defined in formula (I) containing from 5 to 16 carbon atoms, and a is an integer from 2 to 4.

[0038] An alternative embodiment of this invention comprises an aromatic carboxylic acid ester of the formula




wherein R_5 is a hydrocarbyl group containing from 2 to 18 carbon atoms, preferably from 5 to 18 and most preferably from 5 to 16, with the proviso that R_5 is a primary hydrocarbyl group other than a neo hydrocarbyl group and n is 2.

[0039] Another embodiment of this invention comprises an aromatic carboxylic acid ester of the general formula

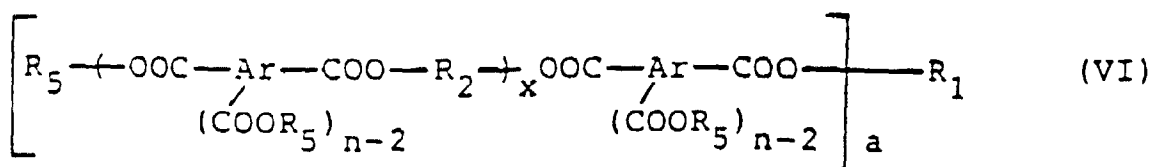

wherein Ar , n , R_2 and x are as defined in formula (I), R_5 is a linear hydrocarbyl group containing from 2 to 18 carbon atoms, R_1 is a di, tri or tetravalent neo hydrocarbyl group as defined in formula (I) and a is an integer from 2 to 4, with the proviso etc from claim 12.

[0040] A further embodiment of this invention comprises an aromatic carboxylic acid ester of the general formula

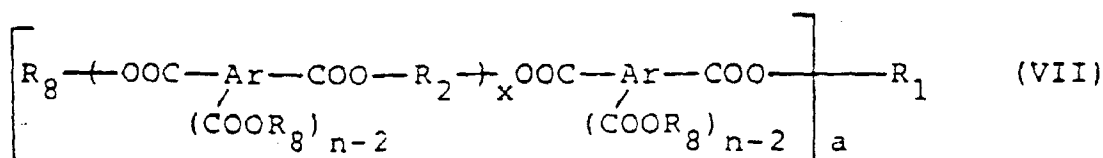

wherein Ar, n, R₁, a and x are as defined in formula (I), and R₈ is independently R or R₅, and at least one R and at least one R₅ group are present in the ester, wherein R is a neo hydrocarbyl group containing from 5 to 18 carbon atoms, with the proviso that R is not a cycloalkyl substituted neo hydrocarbyl group, and R₅ is a linear primary hydrocarbyl group containing from 2 to 18 carbon atoms, with the proviso that n is not 2, and with the further proviso that when Ar is a single ring, a is 1 and x is 0, n is an integer other than 4.

The Hydrocarbyl Group R₂

[0041] The hydrocarbyl group R₂ is derived from a dihydric alcohol containing between 2 and 18 carbon atoms. Preferably R₂ contains between 2 and 12 carbon atoms, and most preferably between 2 and 8 carbon atoms. Suitable dihydric alcohols include ethylene glycol; 1,3-propylene glycol; 1,4-butane diol; neopentyl glycol; 1,5 pentane diol; 1,6-hexane diol and mixtures thereof.

[0042] The preparation of specific compounds of the present invention are further illustrated in the non-limiting examples that follow.

[0043] It is pointed out that in the following examples, and elsewhere in the present specification and claims, all percentages are intended to express percent by weight and all parts are intended to express parts by weight unless otherwise specified.

Comparative Example 1

[0044] A one-liter flask, equipped with a Dean-Stark trap, condenser, thermowell, stirrer and nitrogen inlet tube, is charged with 166 parts (1 mole) of terephthalic acid, 144 parts of Alfol 8-10 alcohol (1 mole), 144 parts of 2,2,4-trimethyl-1-pentanol (1.1 mole), 10 parts of p-toluenesulfonic acid monohydrate and 200 parts xylene. The contents are heated to reflux under a slow nitrogen purge, and water is removed by azeotropic distillation over an 8-hour period. The temperature is gradually increased to 175°C over two hours by slow removal of toluene and azeotrope, and held at that temperature for two hours while additional volatiles are removed. The reaction mixture is cooled to 150°C, and a vacuum (10 Torr)(1.3kPa) is applied to remove volatiles at that temperature. The stripped mixture is then cooled to 90°C, stirred for 30 minutes with 15 parts of calcium hydroxide to neutralize the acid catalyst, then filtered through a thin pad of diatomaceous earth to give the ester product.

Example 1

[0045] To a 2-liter flask equipped with a Dean-Stark trap, condenser, thermowell, stirrer and subsurface nitrogen sparging tube, is charged 384 parts (2 moles) of trimellitic anhydride, 104 parts (1 mole) of neopentyl glycol and 400 parts of toluene. The mixture was heated to gentle reflux with stirring and a slow nitrogen sparge, and held there for 30 minutes. Then, 526 parts (4.1 moles) of 2,2,4-trimethylpentanol and 8 parts of p-toluenesulfonic acid monohydrate are added, and the mixture held at reflux for 16 hours, while water is removed by azeotropic distillation. The reaction mixture was stripped at 120°C/15 Torr (1.9kPa), then treated with 7 parts of calcium hydroxide for 30 minutes. Filtration through a thin pad of diatomaceous earth in a Buchner funnel gave 834 parts of a light yellow, viscous ester product.

Example 2

[0046] To a flask fitted per Comparative Example 1 are added 47.1 parts (0.146 moles) benzophenone tetracarboxylic acid anhydride, 95 parts (0.73 moles) 2,2,4-trimethyl-1-pentanol, 100 parts xylene and 2 parts (0.01 moles) para-toluene sulfonic acid. The contents are heated to reflux and maintained for 11 hours. At 80°C, 1.5 parts (0.02 moles) calcium hydroxide are added to neutralize the catalyst. The contents are stripped to 180°C and 10 mm mercury to obtain a product with a phenolphthalein neutralization number of 0.7.

Example 3

[0047] To a flask fitted per Comparative Example 1 is added 498 parts (3 moles) of isophthalic acid and 700 parts xylene. The solution is heated to 65°C under a slow nitrogen purge, and 384 parts (3 moles) of 2-methyl-2-ethyl-1-pentanol are added. At 70°C, 120 parts (1 mole) of trimethylolethane and 10 parts of p-toluenesulfonic acid monohydrate are added, and the temperature is increased to reflux. Water is removed by azeotropic distillation over a 12-hour period, and the reaction mixture is then stripped at 140°C/10 Torr (1.3kPa) to remove volatiles. The reaction mixture is cooled to 90°C, treated with 15 parts of calcium hydroxide for 30 minutes with rapid stirring, then filtered slowly through a thin pad of diatomaceous earth in a Buchner funnel to give the ester product.

Example 4

[0048] To a flask fitted per Comparative Example 1 are added 284 parts (2 moles) of trimellitic anhydride and 500 parts of xylene. The mixture is heated to 60°C, and 68 parts (0.5 mole) of pentaerythritol and 286 parts (2.2 moles) of 2,2,4-trimethylpentanol are added. The reaction mixture is further heated to 85°C with good stirring, and 15 grams of p-toluenesulfonic acid monohydrate are added. The reaction mixture is taken to reflux and water is removed by azeotropic distillation over a 2-hour period. An additional 260 parts (2 moles) of 2,2,4-trimethylpentanol are added, and the mixture dehydrated at reflux over a 12-hour period. The temperature is gradually raised to 175°C and held there for 3 hours, while volatiles are removed using a slow nitrogen purge. The mixture is stripped at 150°C/10 Torr (1.3kPa), cooled to 85°C, stirred with 15 parts of calcium hydroxide for one hour, then filtered slowly through a pad of diatomaceous earth to give the ester product.

[0049] As previously indicated, the compounds of this invention are useful as thermally and oxidatively stable synthetic fluids. They can be employed alone or in a variety of lubricants based on diverse oils of lubricating viscosity, including natural and synthetic lubricating and grease oils and mixtures thereof.

[0050] Synthetic lubricating oils include hydrocarbon oils and halo-substituted hydrocarbon oils such as polymerized and interpolymerized olefins [e.g., hydrogenated polybutylenes, hydrogenated polypropylenes, hydrogenated propylene-isobutylene copolymers, chlorinated hydrogenated polybutylenes, hydrogenated poly(1-hexenes), hydrogenated poly(1-octenes), hydrogenated poly(1-decenes)]; alkylbenzenes (e.g., dodecylbenzenes, tetradecylbenzenes, dinonylbenzenes, di(2-ethylhexyl) benzenes); polyphenyls (e.g., biphenyls, terphenyls, alkylated polyphenyls); and alkylated diphenyl ethers and alkylated diphenyl sulfides and the derivatives, analogs and homologs thereof.

[0051] Alkylene oxide polymers and interpolymers and derivatives thereof where the terminal hydroxyl groups have been modified by esterification, etherification, etc., constitute another class of known synthetic lubricating oils. These are exemplified by polyoxyalkylene polymers prepared by polymerization of ethylene oxide or propylene oxide, the alkyl and aryl ethers of these polyoxyalkylene polymers (e.g., methylpolyisopropylene glycol ether having an average molecular weight of 1000, diphenyl ether of polyethylene glycol having a molecular weight of 500-1000, diethyl ether of polypropylene glycol having a molecular weight of 1000-1500); and mono- and polycarboxylic esters thereof, for example, the acetic acid esters, mixed C₃-C₈ fatty acid esters and C₁₃ Oxo acid diester of tetraethylene glycol.

[0052] Another suitable class of synthetic lubricating oils comprises the esters of dicarboxylic acids (e.g., phthalic acid, succinic acid, alkyl succinic acids and hydrogenated alkenyl succinic acids, maleic acid, azelaic acid, suberic acid, sebacic acid, fumaric acid, adipic acid, linoleic acid dimer, malonic acid, alkylmalonic acids) with a variety of alcohols (e.g., butyl alcohol, hexyl alcohol, dodecyl alcohol, 2-ethylhexyl alcohol, ethylene glycol, diethylene glycol monoether, propylene glycol). Specific examples of these esters include dibutyl adipate, di(2-ethylhexyl) sebacate, din-hexyl fumarate, dioctyl sebacate, diisooctyl azelate, diisodecyl azelate, dioctyl phthalate, didecyl phthalate, dieicosyl sebacate, the 2-ethylhexyl diester of linoleic acid dimer, and the complex ester formed by reacting one mole of sebacic acid with two moles of tetraethylene glycol and two moles of 2-ethylhexanoic acid.

[0053] Esters useful as synthetic oils also include those made from C₅ to C₁₂ monocarboxylic acids and polyols and polyol ethers such as neopentyl glycol, trimethylolpropane, pentaerythritol, dipentaerythritol and tripentaerythritol.

[0054] Silicon-based oils such as the polyalkyl-, polyaryl-, polyalkoxy-, or polyaryloxysiloxane oils and silicate oils comprise another useful class of synthetic lubricants; they include tetraethyl silicate, tetraisopropyl silicate, tetra-(2-ethylhexyl) silicate, tetra-(4-methyl-2-ethylhexyl) silicate, tetra-(p-tert-butylphenyl) silicate, hexa-(4-methyl-2-pentoxy)disiloxane, poly(methyl)siloxanes and poly(methylphenyl) siloxanes. Other synthetic lubricating oils include liquid esters of phosphorus-containing acids (e.g., tricresyl phosphate, trioctyl phosphate, diethyl ester of decylphosphonic acid) and polymeric tetrahydrofurans.

[0055] Unrefined, refined and rerefined oils can be used in the lubricants of the present invention. Unrefined oils are those obtained directly from a natural or synthetic source without further purification treatment. For example, a shale oil obtained directly from retorting operations, a petroleum oil obtained directly from distillation or ester oil obtained directly from an esterification process and used without further treatment would be an unrefined oil. Refined oils are similar to the unrefined oils except they have been further treated in one or more purification steps to improve one or

more properties. Many such purification techniques, such as distillation, solvent extraction, acid or base extraction, filtration and percolation are known to those skilled in the art. Rerefined oils are obtained by processes similar to those used to obtain refined oils applied to refined oils which have been already used in service. Such rerefined oils are also known as reclaimed or reprocessed oils and often are additionally processed by techniques for removal of spent additives and oil breakdown products.

[0056] Normally the amount employed of the thermally oxidatively stable lubricants of the present invention will be 10% to 100%, preferably 20% to 90% of the total weight of the lubricating composition.

[0057] The term "minor amount" as used in the specification and appended claims is intended to mean that when a composition contains a "minor amount" of a specific material that amount is less than 50 percent by weight of the composition.

[0058] The term "major amount" as used in the specification and appended claims is intended to mean that when a composition contains a "major amount" of a specific material that amount is more than 50 percent by weight of the composition.

[0059] The invention also contemplates the use of additives in combination with the compositions of this invention sufficient to inhibit oxidation, corrosion, rust and improve extreme pressure antiwear properties. Such additives include, for example, detergents and dispersants of the ash-producing or ashless type, corrosion- and oxidation-inhibiting agents, pour point depressing agents, extreme pressure agents, antiwear agents, color stabilizers and anti-foam agents.

[0060] The ash-producing detergents are exemplified by oil-soluble neutral and basic salts of alkali or alkaline earth metals with sulfonic acids, carboxylic acids, or organic phosphorus acids characterized by at least one direct carbon-to-phosphorus linkage such as those prepared by the treatment of an olefin polymer (e.g., polyisobutene having a molecular weight of 1000) with a phosphorizing agent such as phosphorus trichloride, phosphorus heptasulfide, phosphorus pentasulfide, phosphorus trichloride and sulfur, white phosphorus and a sulfur halide, or phosphorothioic chloride. The most commonly used salts of such acids are those of sodium, potassium, lithium, calcium, magnesium, strontium and barium.

[0061] The term "basic salt" is used to designate metal salts wherein the metal is present in stoichiometrically larger amounts than the organic acid radical. The commonly employed methods for preparing the basic salts involve heating a mineral oil solution of an acid with an excess of a metal neutralizing agent such as the metal oxide, hydroxide, carbonate, bicarbonate, or sulfide at a temperature about 50°C. The use of a "promoter" in the neutralization step to aid the incorporation of a large excess of metal likewise is known. Examples of compound useful as the promoter include phenolic substances such as phenol, naphthol, alkylphenol, thiophenol, sulfurized alkylphenol, and condensation products of formaldehyde with a phenolic substance; alcohols such as methanol, 2-propanol, octyl alcohol, cello-solve, carbitol, ethylene glycol, stearyl alcohol, and cyclohexyl alcohol; and amines such as aniline, phenylenediamine, phenothiazine, phenyl-naphthylamine, and dodecylamine. A particularly effective method for preparing the basic salts comprises mixing an acid with an excess of a basic alkaline earth metal neutralizing agent and at least one alcohol promoter, and carbonating the mixture at an elevated temperature such as 60-200°C.

[0062] Ashless detergents and dispersants are so called despite the fact that, depending on its constitution, the dispersant may upon combustion yield a non-volatile material such as boric oxide or phosphorus pentoxide; however, it does not ordinarily contain metal and therefore does not yield a metal-containing ash on combustion. Many types are known in the art, and any of them are suitable for use in the lubricant compositions of this invention. The following are illustrative:

(1) Reaction products of carboxylic acids (or derivatives thereof) containing at least 34 and preferably at least 54 atoms with nitrogen containing compounds such as amine, organic hydroxy compounds such as phenols and alcohols, and/or basic inorganic materials. Examples of these "carboxylic dispersants" are described in British Patent 1,306,529 and in many U.S. patents including the following:

3,163,603	3,351,552	3,541,012
3,184,474	3,381,022	3,543,678
3,215,707	3,399,141	3,542,680
3,219,666	3,415,750	3,567,637
3,271,310	3,433,744	3,574,101
3,272,746	3,444,170	3,576,743
3,281,357	3,448,048	3,630,904
3,306,908	3,448,049	3,632,510
3,311,558	3,451,933	3,632,511

(continued)

3,316,177	3,454,607	3,697,428
3,340,281	3,467,668	3,725,441
3,341,542	3,501,405	4,234,435
3,346,493	3,522,179	Re 26,433

(2) Reaction products of relatively high molecular weight aliphatic or alicyclic halides with amines, preferably polyalkylene polyamines. These may be characterized as "amine dispersants" and examples thereof are described for example, in the following U.S. patents: 3,275,554; 3,454,555; 3,438,757 and 3,565,804.

(3) Reaction products of alkyl phenols in which the alkyl group contains at least about 30 carbon atoms with aldehydes (especially formaldehyde) and amines (especially polyalkylene polyamines), which may be characterized as "Mannich dispersants". The materials described in the following U.S. patents are illustrative:

2,459,112	3,442,808	3,591,598
2,962,442	3,448,047	3,600,372
2,984,550	3,545,497	3,634,515
3,036,003	3,459,661	3,649,229
3,166,516	3,461,172	3,697,574
3,236,770	3,493,520	3,725,277
3,355,270	3,539,633	3,725,480
3,368,972	3,558,743	3,726,882
3,413,347	3,586,629	3,980,569

(4) Products obtained by post-treating the carboxylic, amine or Mannich dispersants with such reagents as urea, thiourea, carbon disulfide, aldehydes, ketones, carboxylic acids, hydrocarbon-substituted succinic anhydrides, nitriles, epoxides, boron compounds, phosphorus compounds or the like. Exemplary materials of this kind are described in the following U.S. patents:

3,036,003	3,282,955	3,493,520	3,639,242
3,087,936	3,312,619	3,502,677	3,649,229
3,200,107	3,366,569	3,513,093	3,649,659
3,216,936	3,367,943	3,533,945	3,658,836
3,254,025	3,373,111	3,539,633	3,697,574
3,256,185	3,403,102	3,573,010	3,702,757
3,278,550	3,442,808	3,579,450	3,703,536
3,280,234	3,455,831	3,591,598	3,704,308
3,281,428	3,455,832	3,600,372	3,708,422

(5) Interpolymers of oil-solubilizing monomers such as decyl methacrylate, vinyl decyl ether and high molecular weight olefins with monomers containing polar substituents, e.g., aminoalkyl acrylates or acrylamides and poly-(oxyethylene)-substituted acrylates. These may be characterized as "polymeric dispersants" and examples thereof are disclosed in the following U.S. patents: 3,329,658; 3,366,730; 3,449,250; 3,687,849; 3,519,565 and 3,702,300.

[0063] Extreme pressure agents and corrosion- and oxidation-inhibiting agents which may be included in this invention are exemplified by chlorinated aliphatic hydrocarbons such as chlorinated wax; aromatic amines such as dioctyl diphenylamine, hindered phenols such as methylenebis-2,6-t-butyl phenol, organic sulfides and polysulfides such as benzyl disulfide, bis(chlorobenzyl) disulfide, dibutyl tetrasulfide, sulfurized methyl ester of oleic acid, sulfurized alkyl-phenol, sulfurized dipentene, and sulfurized terpene; phosphosulfurized hydrocarbons such as the reaction product of a phosphorus sulfide with turpentine or methyl oleate, phosphorus esters including principally dihydrocarbon and trihydrocarbon phosphites such as dibutyl phosphite, diheptyl phosphite, dicyclohexyl phosphite, pentylphenyl phosphite, dipentylphenyl phosphite, tridecyl phosphite, distearyl phosphite, dimethyl naphthyl phosphite, oleyl 4-pentylphenyl phosphite, polypropylene (molecular weight 500)-substituted phenyl phosphite, diisobutyl-substituted phenyl phosphite; metal thiocarbamates, such as zinc dioctyldithiocarbamate, and barium heptylphenyl dithiocarbamate; Group II metal phosphorodithioates such as zinc dicyclohexylphosphorodithioate, zinc dioctylphosphorodithioate, barium di

(heptylphenyl)-phosphorodithioate, cadmium dinonylphosphorodithioate, and the zinc salt of a phosphorodithioic acid produced by the reaction of phosphorus pentasulfide with an equimolar mixture of isopropyl alcohol and n-hexyl alcohol.

[0064] Many of the above-mentioned extreme pressure agents and corrosion-oxidation inhibitors also serve as antiwear agents. Zinc dialkylphosphorodithioates are a well known example.

[0065] Pour point depressants are a particularly useful type of additive often included in the lubricating oils described herein. The use of such pour point depressants in oil-based compositions to improve low temperature properties is well known in the art. See, for example, page 8 of "Lubricant Additives" by C.V. Smalheer and R. Kennedy Smith (Lezius-Hiles Co. publishers, Cleveland, Ohio, 1967).

[0066] Examples of useful pour point depressants are polymethacrylates, polyacrylates; polyacrylamides; condensation products of haloparaffin waxes and aromatic compounds; vinyl carboxylate polymers; and terpolymers of dialkylfumarates, vinyl esters of fatty acids and alkylvinylethers. Pour point depressants useful for the purposes of this invention, techniques for their preparation and their uses are described in U.S. Patents 2,387,501; 2,015,748; 2,655,479; 1,815,022; 2,191,498; 2,666,746; 2,721,877; 2,721,878; and 3,250,715.

[0067] Anti-foam agents are used to reduce or prevent the formation of stable foam. Typical anti-foam agents include silicones or organic polymers. Additional anti-foam compositions are described in "Foam Control Agents", by Henry T. Kerner (Noyes Data Corporation, 1976), pages 125-162.


[0068] The thermal stability of a composition of this invention, as measured by thermal gravimetric analysis on the product of Example 3, employing a DuPont Instruments 951 Thermogravimetric analyzer, is shown in the following Table I. The higher the onset temperature, the greater the thermal stability possessed by the composition. Commercially available synthetic fluids that have utility as thermally stable fluids include Emery 3004, a poly alpha-olefin available from Emery Industries, Inc. and Emery 2982, a polyol neo ester available from Emery Industries, Inc. These commercially available fluids are shown as baselines in Table I.

Table I


Thermal Gravimetric Analysis	
Sample	Onset Temperature °C
Emery 3004 (baseline)	238
Emery 2982 (baseline)	250
Example 2	312

Claims


1. An aromatic carboxylic acid ester of the general formula

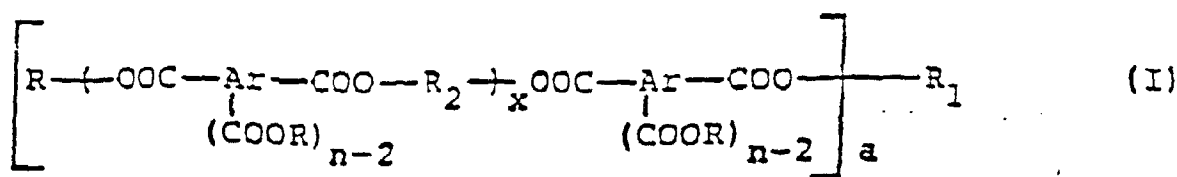

wherein Ar is an aromatic moiety, R is a neo hydrocarbyl group containing from 5 to 18 carbon atoms, with the proviso that R is not a cycloalkyl substituted neo hydrocarbyl group, R₁ is a mono, di, tri or tetravalent neo hydrocarbyl group, containing from 5 to 18 carbon atoms, n is an integer from 2 to 4 and represents the total number of carboxylic acid ester groups on the aromatic moiety, R₂ is a hydrocarbyl group derived from a diol containing from 2 to 18 carbon atoms, x is an integer from 0 to 4, and a is an integer from 1 to 4, and when a is 1, R₁ is monovalent; when a is 2, R₁ is divalent; when a is 3, R₁ is trivalent and derived from a triol of formula

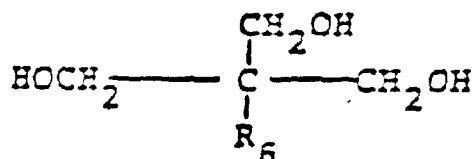

wherein R_6 is a hydrocarbyl group containing from 1 to 14 carbon atoms; and when a is 4, R_1 is tetravalent and derived from a tetraol of formula

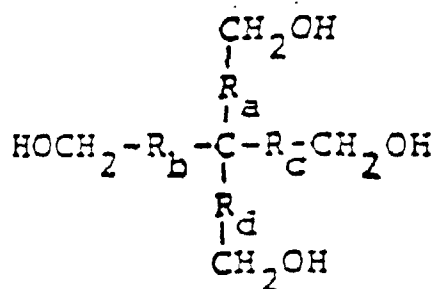

wherein R_a , R_b , R_c and R_d may be the same or different and are hydrocarbyl groups containing from zero up to 3 carbon atoms, and when the hydrocarbyl groups R_a , R_b , R_c and R_d contain no carbon atoms. R_1 is derived from pentaerythritol; with the proviso that when Ar is a single ring, a is 1 and x is 0, n is an integer other than 4.


2. A compound according to claim 1 wherein the aromatic moiety is a benzene or naphthalene moiety.

3. A compound according to either of claims 1 and 2 wherein n is 2 or 3.

4. A compound according to any preceding claim wherein x is 0.

5. A compound according to any preceding claim wherein a is 2, 3 or 4.


6. An aromatic carboxylic acid ester in accordance with claim 1 of the general formula

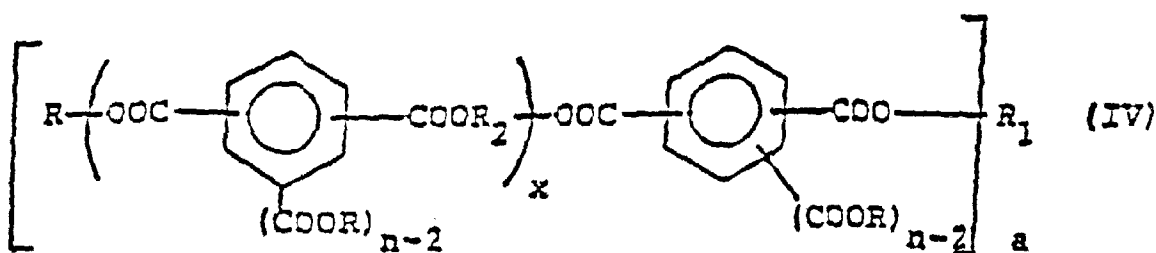


wherein n , R_2 and x are as defined in claim 1, R is a neo hydrocarbyl group containing from 5 to 10 carbon atoms, R_1 is a neo-hydrocarbyl group containing from 5 to 16 carbon atoms, and a is an integer from 2 to 4.

7. A compound according to claim 6 wherein a is 2, 3 or 4 and R_1 is a group containing from 5 to 12 carbon atoms.

8. An aromatic carboxylic acid ester having the formula

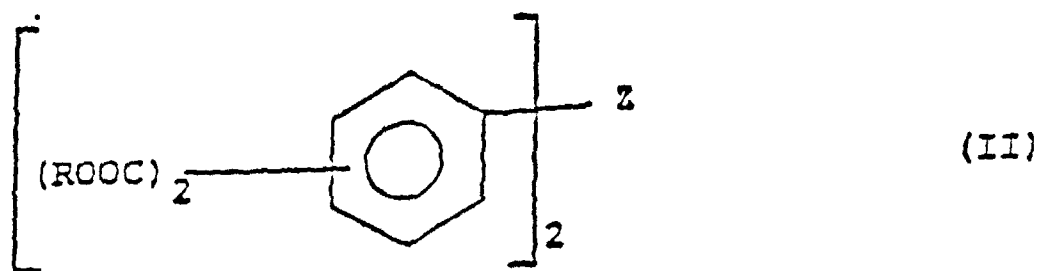


wherein R is a neo hydrocarbyl group containing from 5 to 18 carbon atoms and Z is selected from

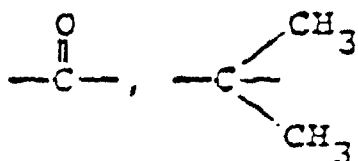


and -O-.

9. An aromatic carboxylic acid ester having the formula

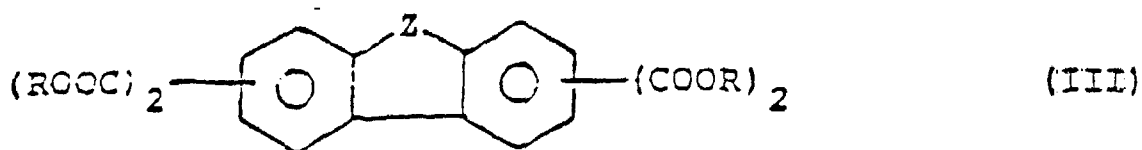


wherein R is a neo hydrocarbyl group containing from 5 to 18 carbon atoms and Z is selected from



and -O-.


10. An aromatic carboxylic acid ester of the formula

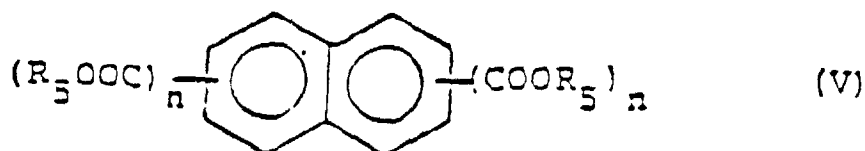

wherein R_5 is a hydrocarbyl group containing from 2 to 18 carbon atoms, with the proviso that R_5 is a primary hydrocarbyl group other than a neo hydrocarbyl group, and n is 2.


11. A compound according to claim 10 wherein R_5 is a hydrocarbonyl group containing from 5 to 18 carbon atoms.

12. An aromatic carboxylic acid ester of the general formula

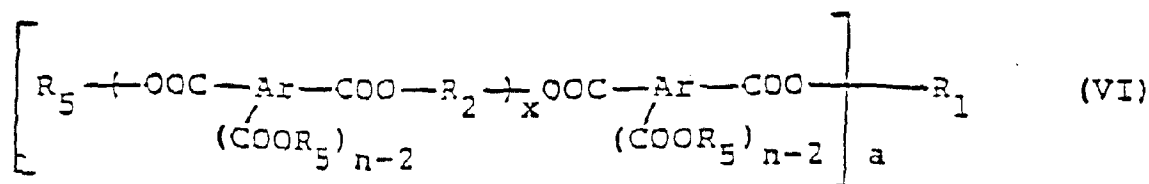

wherein Ar, n, R_2 and x are as defined in claim 1, R_5 is a linear hydrocarbonyl group containing from to 18 carbon atoms, R_1 is a di, tri, or tetravalent neo hydrocarbonyl group as defined in claim 1, and a is an integer from to 4, with the proviso that when Ar is C_6H_4 , n is 2, a is 2, x is 0 or 1 and R_1 is C_5H_{10} , R_5 is other than an alkyl group containing from 1 to 10 carbon atoms and where AR is C_6H_4 , n is 3, a is 2, x is 0, R_1 is neopentyl and contains from 2 to 10 carbon atoms, R_5 is other than an alkyl group containing from 14 to 35 carbon atoms.


13. An aromatic carboxylic acid ester of the general formula

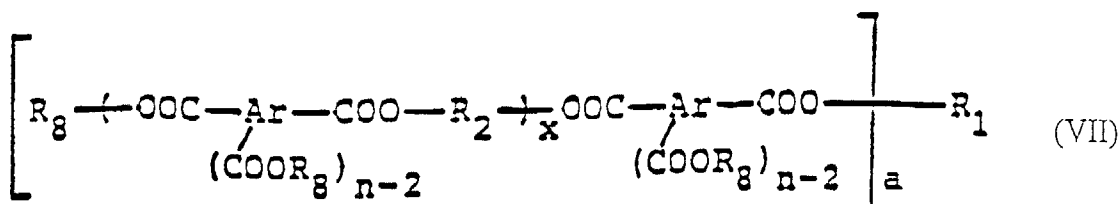

wherein Ar, n, R_1 , a and x are as defined in claim 1, and R_8 is independently R or R_5 , and at least one R and at least one R_5 group are present in the ester, wherein R is a neo hydrocarbonyl group containing from 5 to 18 carbon atoms, with the proviso that R is not a cycloalkyl substituted neo hydrocarbonyl group, R_5 is a linear primary hydrocarbonyl group containing from to 18 carbon atoms, with the proviso that n is not 2, and with the further proviso that when Ar is a single ring, a is 1 and x is 0, n is an integer other than 4.

14. A concentrate which comprises a minor proportion of a lubricating oil and a major proportion of an aromatic carboxylic acid ester according to any one of the preceding claims.


15. A concentrate which comprises a minor proportion of a lubricating oil and a major proportion of an aromatic carboxylic acid ester of the general formula

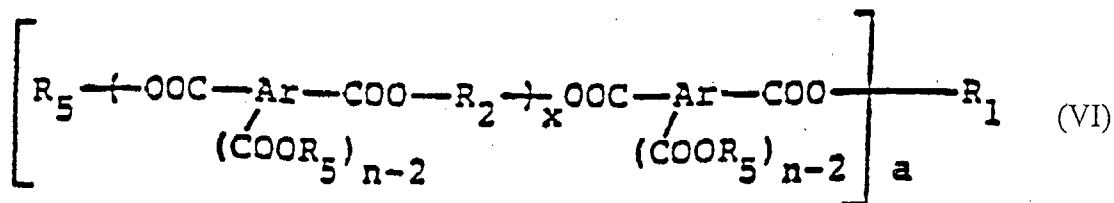

wherein Ar, n, R_2 and x are as defined in claim 1, R_5 is a linear hydrocarbonyl group containing from to 18 carbon atoms, R_1 is a neo hydrocarbonyl group as defined in claim 1. and a is an integer from to 4, with the proviso that when AR is C_6H_4 , n is 3, a is 2, x is 0, R_1 is neopentyl and contains from 2 10 carbon atoms, R_5 is other than an alkyl group containing from 14 to 35 carbon atoms.

16. A lubricant composition which comprises a major proportion of a lubricating oil and a minor proportion of an aromatic carboxylic acid ester according to any one of claims 1 to 13.

17. A lubricant composition which comprises a major proportion of a lubricating oil and a minor proportion of an aromatic carboxylic acid ester of the general formula

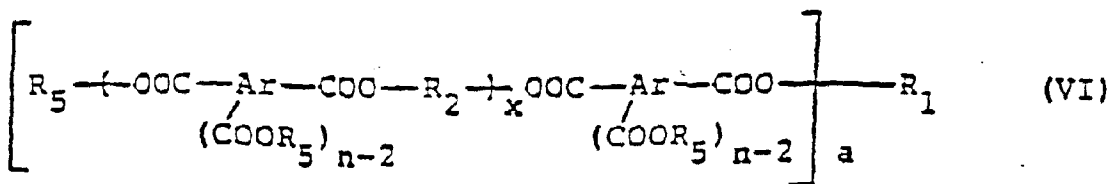


wherein Ar, n, R₂ and x are as defined in claim 1, R₅ is a linear hydrocarbyl group containing from 2 to 18 carbon atoms, R₁ is a neo hydrocarbyl group as defined in claim 1 and a is an integer from 1 to 4, which the proviso that when Ar is C₆H₄, n is 3, a is 2, x is 0. R₁ is neopentyl and contains from 2 to 10 carbon atoms, R₅ is other than an alkyl group containing from 14 to 35 carbon atoms.


18. A thermal oxidatively stable synthetic fluid composition comprising an aromatic carboxylic acid ester according to any one of claims 1 to 13.

Patentansprüche


1. Ein aromatischer Carbonsäureester der allgemeinen Formel (I)

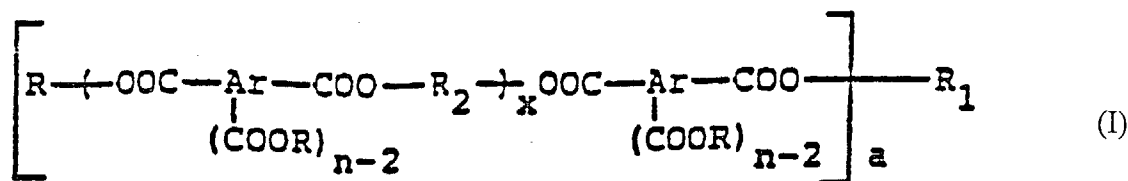

in der Ar ein aromatischer Rest, der Rest R ein Neohydrocarbylrest mit 5 bis 18 Kohlenstoffatomen ist, mit der Maßgabe, daß R kein Cycloalkyl-substituierter Neohydrocarbylrest ist, der Rest R₁ ein ein-, zwei-, drei- oder vierwertiger Neohydrocarbylrest mit 5 bis 18 Kohlenstoffatomen ist, n eine ganze Zahl von 2 bis 4 ist und die Gesamtzahl der Carbonsäureestergruppen am aromatischen Rest darstellt, der Rest R₂ ein Hydrocarbylrest ist, der sich von einem Diol mit 2 bis 18 Kohlenstoffatomen ableitet, x eine ganze Zahl von 0 bis 4 ist und a eine ganze Zahl von 1 bis 4 ist, und wenn a den Wert 1 hat, der Rest R₁ einwertig ist, wenn a den Wert 2 hat, der Rest R₁ zweiwertig ist, wenn a den Wert 3 hat, der Rest R₁ dreiwertig ist und sich von einem Triol der allgemeinen Formel

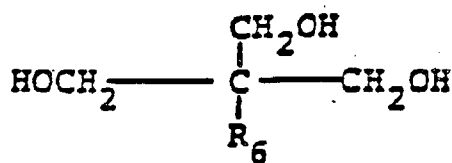

ableitet, in der R₆ ein Hydrocarbylrest mit 1 bis 14 Kohlenstoffatomen ist, und wenn a den Wert 4 hat, der Rest R₁ vierwertig ist und sich von einem Tetraol der allgemeinen Formel

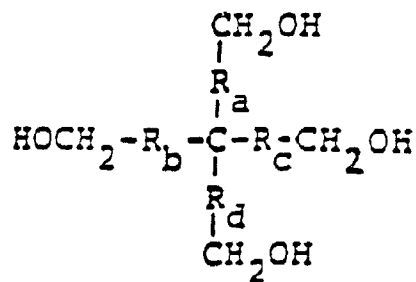

ableitet, in der die Reste R_a , R_b , R_c und R_d gleich oder verschieden sind und Hydrocarbylreste mit 0 bis 3 Kohlenstoffatomen sind, und wenn die Hydrocarbylreste R_a , R_b , R_c und R_d keine Kohlenstoffatome enthalten, R_1 sich von Pentaerythrit ableitet, mit der Maßgabe, wenn der Rest Ar ein einziger Ring ist, a den Wert 1 und x den Wert 0 hat und n eine ganze Zahl verschieden von 4 ist.


2. Verbindung nach Anspruch 1, wobei der aromatische Rest ein Benzol- oder Naphthalinrest ist.

3. Verbindung nach Anspruch 1 oder 2, wobei n den Wert 2 oder 3 hat.

4. Verbindung nach einem der Ansprüche 1 bis 3, wobei x den Wert 0 hat.

5. Verbindung nach einem der Ansprüche 1 bis 4, wobei a den Wert 2, 3 oder 4 hat.


6. Ein aromatischer Carbonsäureester nach Anspruch 1 der allgemeinen Formel (IV)

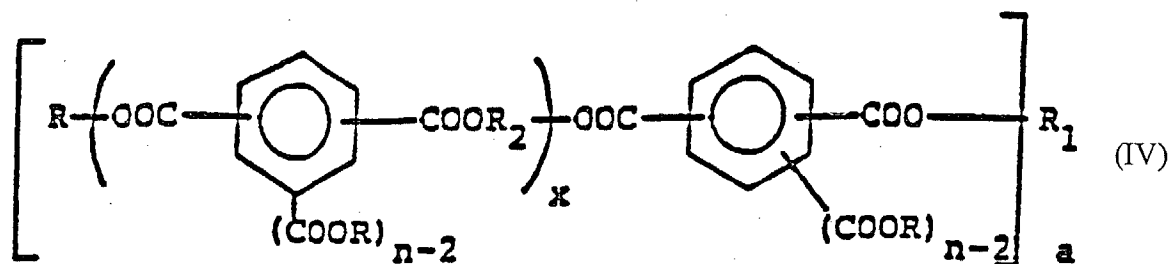


in der n , R_2 und x die in Anspruch 1 angegebene Bedeutung haben, der Rest R ein Neohydrocarbylrest mit 5 bis 10 Kohlenstoffatomen ist, der Rest R_1 ein Neohydrocarbylrest mit 5 bis 16 Kohlenstoffatomen ist und a eine ganze Zahl von 2 bis 4 ist.

7. Verbindung nach Anspruch 6, wobei a den Wert 2, 3 oder 4 hat und der Rest R_1 ein Rest mit 5 bis 12 Kohlenstoffatomen ist.


8. Ein aromatischer Carbonsäureester der allgemeinen Formel (II)

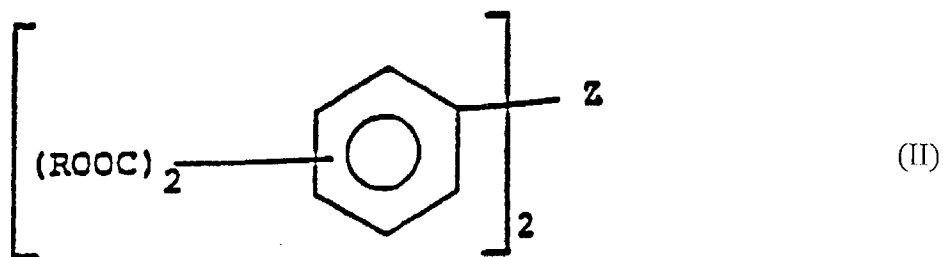


in der der Rest R ein Neohydrocarbylrest mit 5 bis 18 Kohlenstoffatomen ist und Z ausgewählt ist aus:



9. Ein aromatischer Carbonsäureester der allgemeinen Formel (III)

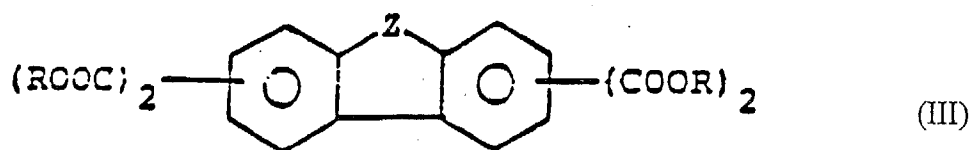


in der der Rest R ein Neohydrocarbylrest mit 5 bis 18 Kohlenstoffatomen ist und Z ausgewählt ist aus:



und -O-.


10. Ein aromatischer Carbonsäureester der allgemeinen Formel (V)

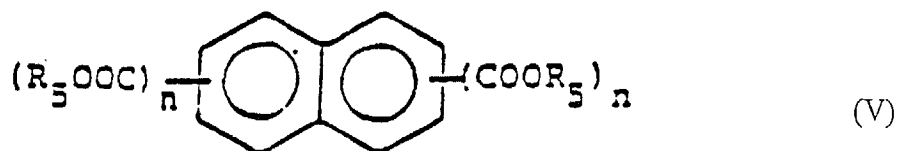

in der der Rest R_5 ein Hydrocarbylrest mit 2 bis 18 Kohlenstoffatomen ist, mit der Maßgabe, daß R_5 ein anderer primärer Hydrocarbylrest ist als ein Neohydrocarbylrest, und n den Wert 2 hat.


11. Eine Verbindung nach Anspruch 10, wobei R_5 ein Hydrocarbylrest mit 5 bis 18 Kohlenstoffatomen ist.

12. Ein aromatischer Carbonsäureester der allgemeinen Formel (VI)

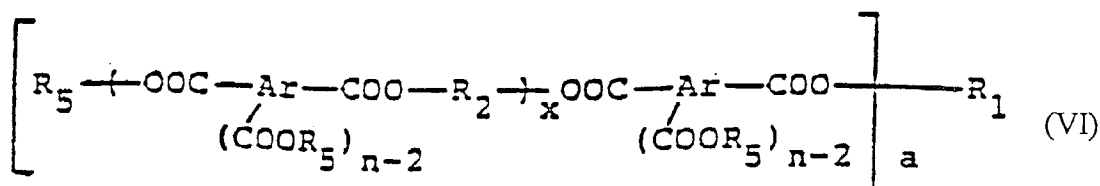

in der Ar, n, R₂ und x die in Anspruch 1 angegebene Bedeutung haben, der Rest R₅ ein linearer Hydrocarbylrest mit 2 bis 18 Kohlenstoffatomen ist, der Rest R₁ ein zwei-, drei- oder vierwertiger Neohydrocarbylrest gemäß Anspruch 1 ist, und a einen Wert von 2 bis 4 hat, mit der Maßgabe, wenn Ar der Rest C₆H₄ ist, n den Wert 2, a den Wert 2, x den Wert 0 oder 1 hat und R₁ der Rest C₅H₁₀ ist, R₅ keine Alkylgruppe mit 1 bis 10 Kohlenstoffatomen ist, und wenn Ar der Rest C₆H₄ ist, n den Wert 3, a den Wert 2, x den Wert 0 hat, R₁ Neopentyl mit 2 bis 10 Kohlenstoffatomen ist, R₅ keine Alkylgruppe mit 14 bis 35 Kohlenstoffatomen ist.


13. Ein aromatischer Carbonsäureester der allgemeinen Formel (VII)

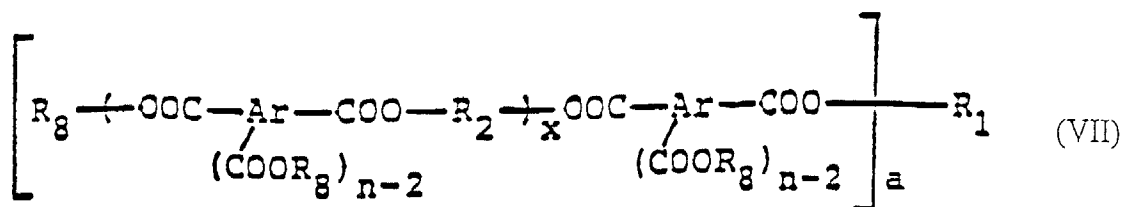

in der Ar, n, R₁, a und x die in Anspruch 1 angegebene Bedeutung haben und R₈ unabhängig den Rest R oder R₅ bedeutet, und mindestens ein Rest R und mindestens ein Rest R₅ im Ester vorliegen, wobei R ein Neohydrocarbylrest mit 5 bis 18 Kohlenstoffatomen ist, mit der Maßgabe, daß R kein Cycloalkyl-substituierter Neohydrocarbylrest ist, R₅ ein linearer primärer Hydrocarbylrest mit 2 bis 18 Kohlenstoffatomen ist, mit der Maßgabe, daß n nicht den Wert 2 hat, und mit der weiteren Maßgabe, wenn Ar ein einziger Ring ist, a den Wert 1 und x den Wert 0 hat und n eine ganze Zahl verschieden von 4 ist.

14. Ein Konzentrat, umfassend einen kleineren Anteil eines Schmieröls und einen größeren Anteil eines aromatischen Carbonsäureesters nach einem der Ansprüche 1 bis 13.

15. Ein Konzentrat, umfassend einen kleineren Anteil eines Schmieröls und einen größeren Anteil eines aromatischen Carbonsäureesters der allgemeinen Formel (VI)

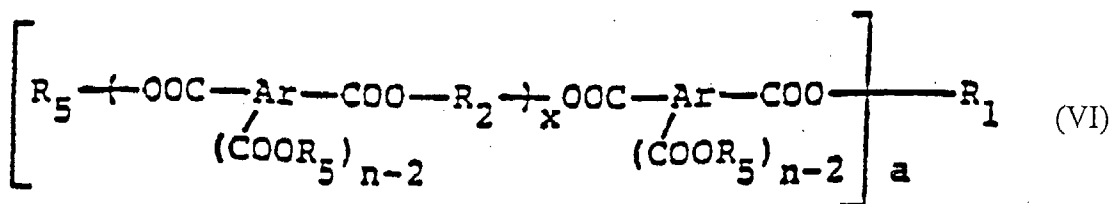


in der Ar, n, R₂ und x die in Anspruch 1 angegebene Bedeutung haben, der Rest R₅ ein linearer Hydrocarbylrest mit 2 bis 18 Kohlenstoffatomen ist, der Rest R₁ ein Neohydrocarbylrest gemäß Anspruch 1 ist, und a eine ganze Zahl von 2 bis 4 ist, mit der Maßgabe, wenn Ar der Rest C₆H₄ ist, n den Wert 3, a den Wert 2, x den Wert 0 hat, R₁ Neopentyl mit 2 bis 10 Kohlenstoffatomen ist, R₅ keine Alkylgruppe mit 14 bis 35 Kohlenstoffatomen ist.

16. Eine Schmiermittelzusammensetzung, umfassend einen größeren Anteil eines Schmieröls und einen kleineren

Anteil eines aromatischen Carbonsäureesters nach einem der Ansprüche 1 bis 13.

17. Eine Schmiermittelzusammensetzung, umfassend einen größeren Anteil eines Schmieröls und einen kleineren Anteil eines aromatischen Carbonsäureesters der allgemeinen Formel (VI)

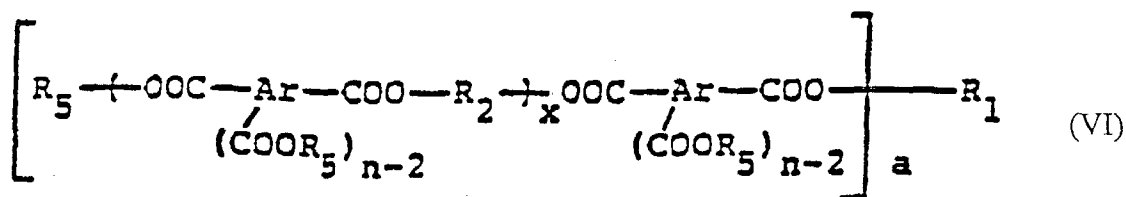


in der Ar, n, R₂ und x die in Anspruch 1 angegebene Bedeutung haben, der Rest R₅ ein linearer Hydrocarbylrest mit 2 bis 18 Kohlenstoffatomen ist, der Rest R₁ ein Neohydrocarbylrest gemäß Anspruch 1 ist, und a eine ganze Zahl von 2 bis 4 ist, mit der Maßgabe, wenn Ar der Rest C₆H₄ ist, n den Wert 3, a den Wert 2, x den Wert 0 hat, R₁ Neopentyl mit 2 bis 10 Kohlenstoffatomen ist, R₅ keine Alkylgruppe mit 14 bis 35 Kohlenstoffatomen ist.


18. Eine thermisch-oxidativ stabile synthetische fließfähige Zusammensetzung, umfassend einen aromatischen Carbonsäureester nach einem der Ansprüche 1 bis 13.

Revendications


1. Un ester d'acide aromatique carboxylique de la formule générale

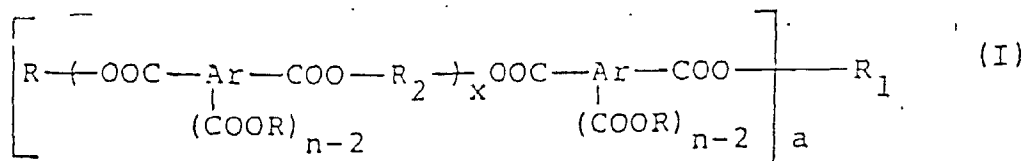

dans laquelle Ar est une partie aromatique, R est un groupe néo-hydrocarbyle renfermant de 5 à 18 atomes de carbone, sous la condition que R n'est pas un groupe néo-hydrocarbyle à substitution cycloalkyle, R₁ est un groupe néo-hydrocarbyle mono-, di-, tri- ou tétravalent, renfermant de 5 à 18 atomes de carbone, n est un nombre entier de 2 à 4 et représente le nombre total de groupes acide carboxylique estérifiés sur la partie aromatique, R₂ est un groupe hydrocarbyle dérivé d'un diol renfermant de 2 à 18 atomes de carbone, x est un nombre entier de 0 à 4, et a est un nombre entier de 1 à 4, et lorsque a est 1, R₁ est monovalent ; lorsque a est 2, R₁ est divalent ; lorsque a est 3, R₁ est trivalent et dérivé d'un triol de formule




dans laquelle R₆ est un groupe hydrocarbyle renfermant de 1 à 14 atomes de carbone ; et lorsque a est 4, R₁ est tétravalent et dérivé d'un tétraol de la formule

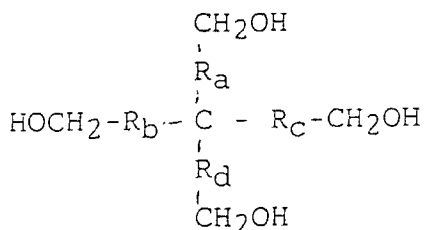


dans laquelle R_a , R_b , R_c et R_d peuvent être identiques ou différents et sont des groupes hydrocarbyles renfermant de 0 jusqu'à 3 atomes de carbone, et lorsque les groupes hydrocarbyle R_a , R_b , R_c et R_d ne renferment pas d'atomes de carbone, R_1 est dérivé du pentaérythritol, sous la condition que, lorsque Ar est un cycle unique, a est 1 et x est 0, n est un nombre entier différent de 4.

2. Un composé selon la revendication 1, dans lequel la partie aromatique est une partie benzénique ou naphthalénique.
3. Un composé selon l'une quelconque des revendications 1 et 2, dans lequel n est 2 ou 3.
4. Un composé selon l'une quelconque des revendications précédentes, dans lequel x est 0.
5. Un composé selon l'une quelconque des revendications précédentes, dans lequel a est 2, 3 ou 4.
6. Un ester d'acide aromatique carboxylique selon la revendication 1, de la formule générale

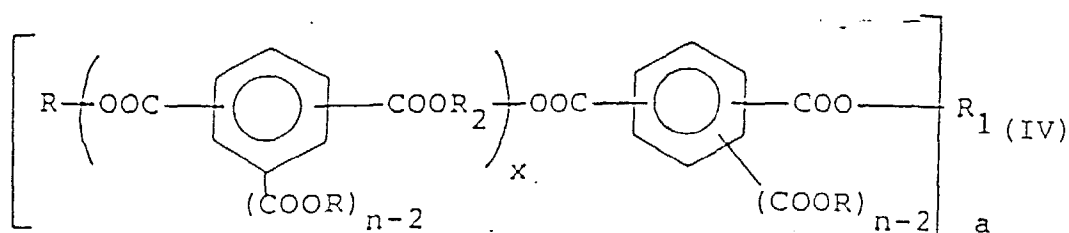


dans laquelle n, R_2 et x sont tels que définis dans la revendication 1, R est un groupe néo-hydrocarbyle renfermant de 5 à 10 atomes de carbone, R_1 est un groupe néo-hydrocarbyle, renfermant de 5 à 16 atomes de carbone, et a est un nombre entier de 2 à 4.

7. Un composé selon la revendication 8, dans lequel a est 2, 3 ou 4 et R_1 est un groupe renfermant de 5 à 12 atomes de carbone.
8. Un ester d'acide aromatique carboxylique ayant la formule

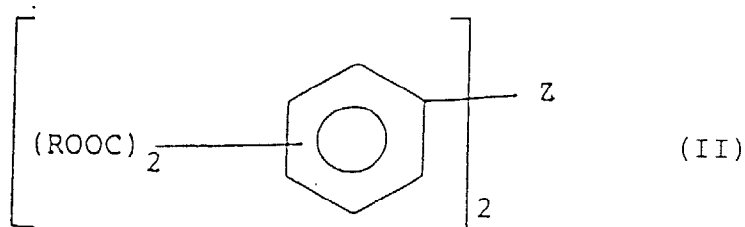


dans laquelle R est un groupe néo-hydrocarbyle contenant de 5 à 18 atomes de carbone et Z est choisi parmi




et -O-.

9. Un ester d'acide carboxylique aromatique ayant la formule




dans laquelle R est un groupe néo-hydrocarbyle renfermant de 5 à 18 atomes de carbone et Z est choisi parmi



et -O-.


10. Un ester d'acide aromatique carboxylique de la formule

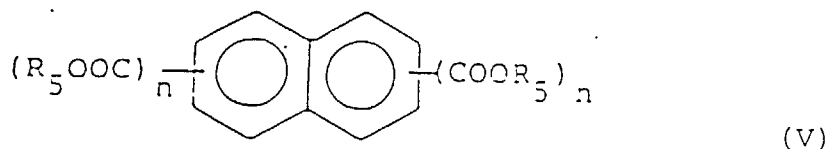

dans laquelle R_5 est un groupe hydrocarbyle renfermant de 2 à 18 atomes de carbone, sous la condition que R_8 est un groupe hydrocarbyle primaire différent d'un groupe néo-hydrocarbyle, et n est 2.

11. Un composé selon la revendication 10, dans lequel R_5 est un groupe hydrocarbyle renfermant de 5 à 18 atomes de carbone.


12. Un ester d'acide aromatique carboxylique de la formule générale

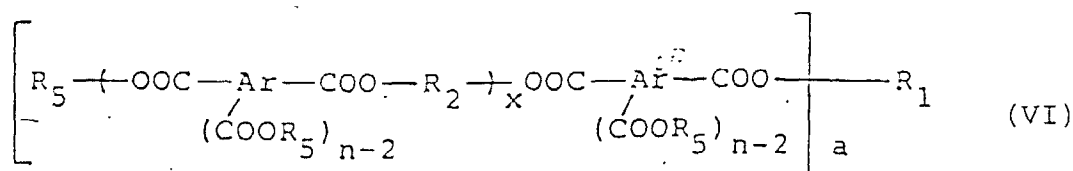

dans laquelle Ar, n, R_2 et x sont tels que définis dans la revendication 1, R_5 est un groupe hydrocarbyle linéaire renfermant de 2 à 18 atomes de carbone, R_1 est un groupe néo-hydrocarbyle di-, tri- ou tétravalent tel que défini dans la revendication 1, et a est un nombre entier de 2 à 4, sous la condition que, lorsque A est C_6H_4 , n est 2, a est 2, x est 0 ou 1 et R_1 est C_5H_{10} , R_5 est différent d'un groupe alkyle contenant de 1 à 10 atomes de carbone et

lorsque Ar est C₆H₄, n est 3, a est 2, x est 0, R₁ est du néopentyle et renferme de 2 à 10 atomes de carbone, R₅ est différent d'un groupe alkyle renfermant de 14 à 35 atomes de carbone.


13. Un ester d'acide aromatique carboxylique de la formule générale

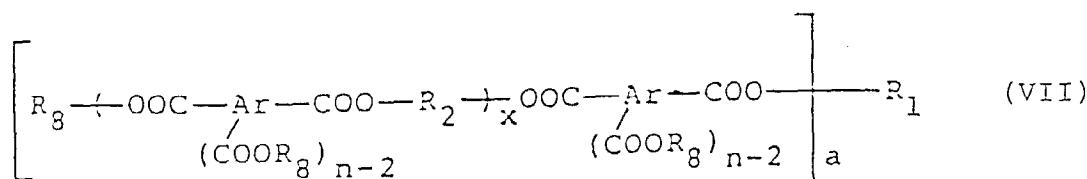

dans laquelle Ar, n, R₁, a et x sont tels que définis dans la revendication 1, et R₈ représente indépendamment R ou R₅, et au moins un groupe R ainsi qu'au moins un groupe R₅ sont présents dans l'ester, dans lequel R est un groupe néo-hydrocarbyle renfermant de 5 à 18 atomes de carbone, sous la condition que R n'est pas un groupe néo-hydrocarbyle à substitution cycloalkyle, R₅ est un groupe hydrocarbyle linéaire primaire, renfermant de 2 à 18 atomes de carbone, sous la condition que n n'est pas 2, et en outre sous la condition que, lorsque Ar est un cycle unique, a est 1 et x est 0, n est un nombre entier différent de 4.

14. Un concentré qui comprend une proportion mineure d'une huile lubrifiante et une proportion prépondérante d'un ester d'acide aromatique carboxylique selon l'une quelconque des revendications précédentes.


15. Un concentré qui comporte une proportion mineure d'une huile lubrifiante et une proportion prépondérante d'un ester d'acide aromatique carboxylique de la formule générale

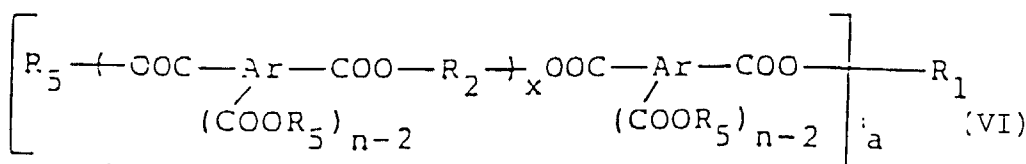

dans laquelle Ar, n, R₂ et x sont tels que définis dans la revendication 1, R₅ est un groupe hydrocarbyle linéaire renfermant de 2 à 18 atomes de carbone, R₁ est un groupe néo-hydrocarbyle tel que défini dans la revendication 1 et a est un nombre entier de 2 à 4, sous la condition que lorsque Ar est C₆H₄, n est 3, a est 2, x est 0, R₁ est du néopentyle et renferme de 2 à 10 atomes de carbone, R₅ est différent d'un groupe alkyle renfermant de 14 à 35 atomes de carbone.

16. Une composition lubrifiante qui comporte une proportion prépondérante d'une huile lubrifiante et une proportion mineure d'un ester d'acide aromatique carboxylique selon l'une quelconque des revendications 1 à 13.

17. Une composition lubrifiante qui comporte une proportion prépondérante d'une huile lubrifiante et une proportion mineure d'un ester d'acide aromatique carboxylique de la formule générale

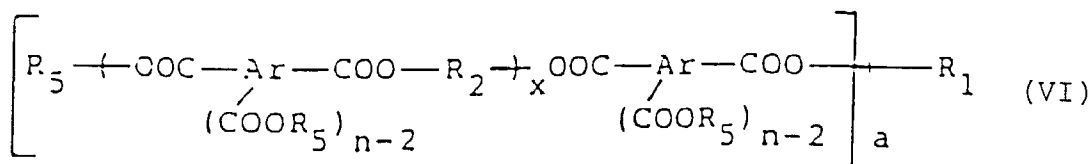

dans laquelle Ar, n, R₂ et x sont tels que définis dans la revendication 1, R₅ est un groupe hydrocarbyle linéaire, renfermant de 2 à 18 atomes de carbone, R₁ est un groupe néo-hydrocarbyle tel que défini dans la revendication 1, et a est un nombre entier de 2 à 4, sous la condition que lorsque Ar est C₆H₄, n est 3, a est 2, x est 0, R₁ est du néopentyle et renferme de 2 à 10 atomes de carbone, R₅ est différent d'un groupe alkyle renfermant de 14 à 35 atomes de carbone.

35 atomes de carbone.

- 18.** Une composition fluide synthétique stable à la chaleur et à l'oxydation, comportant un ester d'acide aromatique carboxylique selon l'une quelconque des revendications 1 à 13.

5

10

15

20

25

30

35

40

45

50

55