

19



Europäisches Patentamt
European Patent Office
Office européen des brevets



11 Publication number: **0 678 572 A1**

12

EUROPEAN PATENT APPLICATION

21 Application number: **94201092.7**

51 Int. Cl.⁸: **C11D 3/37, C11D 11/02,
C11D 3/02, C11D 3/33,
C11D 3/36**

22 Date of filing: **20.04.94**

43 Date of publication of application:
25.10.95 Bulletin 95/43

71 Applicant: **THE PROCTER & GAMBLE
COMPANY
One Procter & Gamble Plaza
Cincinnati,
Ohio 45202 (US)**

84 Designated Contracting States:
**AT BE CH DE DK ES FR GB GR IE IT LI LU NL
PT SE**

72 Inventor: **Doumen, Achille, Jules, Edmond
Wolvertemsesteenweg 210
B-1785 Merchtem (BE)
Inventor: Goovaerts, Luc
Broekstraat 29
B-3150 Haacht (BE)
Inventor: Vega, Jose, Luis
Bloemendallaan 47
B-1853 Strombeek-Bever (BE)**

74 Representative: **Canonici, Jean-Jacques et al
Procter & Gamble European Technical
Center N.V.
Temselaan 100
B-1853 Strombeek-Bever (BE)**

54 **Detergent powder compositions.**

57 The present invention relates to free-flowing detergent powder which is prepared by spray drying, the powder comprising :

- (a) from 10% to 90% by weight of a complex, said complex comprising
 - (a)(i) a chelating agent and
 - (a)(ii) a metal ion selected from the group consisting of magnesium, calcium, strontium, zinc and aluminium, and mixtures thereof; and
- (b) from 10% to 90% by weight of a polymer, said polymer comprising functional groups which are anionic.

EP 0 678 572 A1

The present invention relates to detergent powders which essentially comprise a complexed chelating agent and an anionic polymer. The powders may be readily prepared by spray drying.

Detergent components and compositions have been made using various spray drying techniques for many years. Typically various detergent active materials are dissolved or dispersed in an aqueous solution which is then pumped under high pressure to an atomiser, such as a nozzle or a spinning disc.

Excess water is then removed from the atomised droplets by a drying gas, usually hot air. The dried droplets then form a free-flowing granular product. Most granular products prepared in this way comprise both organic and inorganic materials. One prior art disclosure of a detergent component in which the principle detergent active material is a complexed chelating agent is :

US 4 259 200, issued on March 31st, 1981 discloses complexes of chelating agent with metal ions. The complexes are said to have improved chemical stability in bleaching compositions. Various methods of obtaining a particulate product which comprises the metal/chelating agent complexes are also disclosed, including spray-drying, by including inorganic salts such as tetraborate, triphosphate, sulphate.

In fact, chelating agents are frequently precomplexed with magnesium in order to protect them from degradation in the presence of bleach. However molar ratios of magnesium : chelating agent of greater than 3:1 are difficult to prepare due to precipitation from aqueous solution. Precipitation in a spray drying process rapidly leads to blockage of the nozzle. Furthermore, powders which essentially consist of chelating agent / magnesium complex have a very low rate of solubility.

It has now been found that the addition of various polymers which comprise anionic functional groups avoids the precipitation problem, allows higher molar ratios of chelating agent to magnesium to be prepared by spray drying, and greatly increases the rate of solubility of the resulting powder.

The addition of anionic polymer also enables powders to be prepared which have a very high organic content, preferably greater than 80%. Such powders which are difficult to prepare by other means, provide a convenient method for handling and processing organic polymers.

Summary of the Invention

The present invention relates to free-flowing detergent powder which is prepared by spray drying, the powder comprising :

- (a) from 10% to 90% by weight of a complex, said complex comprising
 - (a)(i) a chelating agent and
 - (a)(ii) a metal ion selected from the group consisting of magnesium, calcium, strontium, zinc and aluminium, and mixtures thereof,
 characterised in that the powder further comprises
- (b) from 10% to 90% by weight of a polymer, said polymer comprising functional groups which are anionic.

Preferably the powder comprises less than 20%, more preferably less than 10% by weight (on anhydrous basis), of inorganic components other than the metal ion (a)(ii). Most preferably the total level of aluminosilicate and carbonate (on anhydrous basis) is less than 10% by weight.

The chelating agent is preferably selected from the group consisting of phosphonic acid, succinic acid, the salts of phosphonic or succinic acid, or mixtures thereof, even more preferred chelating agents are diethylene triamine penta (methylene phosphonic acid), or ethylenediamine-N-N'-disuccinic acid, or their salts, or mixtures thereof. The preferred metal ion is magnesium.

The molar ratio of the metal ion to the chelating agent is preferably greater than 3:1.

The polymer may comprise carboxylate functional groups, especially the water-soluble salts of homo- and copolymers of aliphatic carboxylic acids such as acrylic acid, maleic acid, vinylic acid, itaconic acid, mesaconic acid, fumaric acid, aconitic acid, citraconic acid, methylenemalonic acid and mixtures thereof.

A preferred polymer is a copolymer of maleic and acrylic acid having a molecular weight of from 2000 to 100 000.

Optionally the free-flowing detergent powder may also comprise a cationic surfactant. Where present the cationic surfactant may be present at from 1% to 80% by weight , from 2% to 20% by weight of dimethyl ethoxy ammonium chloride being preferred.

Detailed Description of the Invention


The essential components of the present invention are a chelating agent and a polymer comprising anionic functional groups. Examples of these will now be given in more detail.

Chelating Agents


The chelating agents suitable for use in the present invention can be chosen from a wide range of chemicals which are known to the man skilled in the art. Examples of suitable chelating agents are phosphonic and succinic acids and their salts.

The polyphosphonates are the sodium and potassium salts of ethylene diphosphonic acid, the sodium and potassium salts of ethane 1-hydroxy-1,1-diphosphonic acid and the sodium and potassium salts of ethane, 1,1,2-triphosphonic acid. Examples of particularly suitable chelating agents are ethylene diamine tetra (methylene phosphonic acid) and diethylene triamine penta (methylene phosphonic acid).

Another preferred chelating agent is ethylenediamine-N,N'-disuccinic acid (EDDS) or the alkali metal, alkaline earth metal, ammonium, or substituted ammonium salts thereof, or mixtures thereof. Preferred EDDS compounds are the free acid form and the sodium or magnesium salt thereof. Examples of such preferred sodium salts of EDDS include NaEDDS, Na₂EDDS and Na₄EDDS. Examples of such preferred magnesium salts of EDDS include Mg EDDS and Mg₂EDDS. The magnesium salts are the most preferred for inclusion in compositions in accordance with the invention. The structure of the acid form of EDDS is as follows :

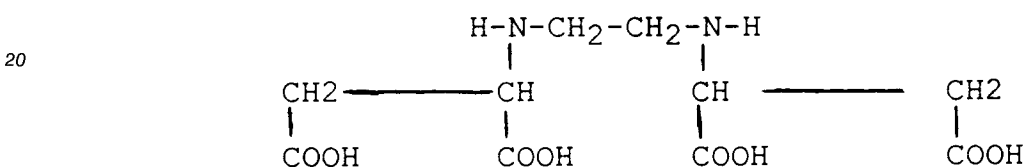


EDDS can be synthesised, for example, from readily available, inexpensive starting material such as maleic anhydride and ethylene diamine as follows :

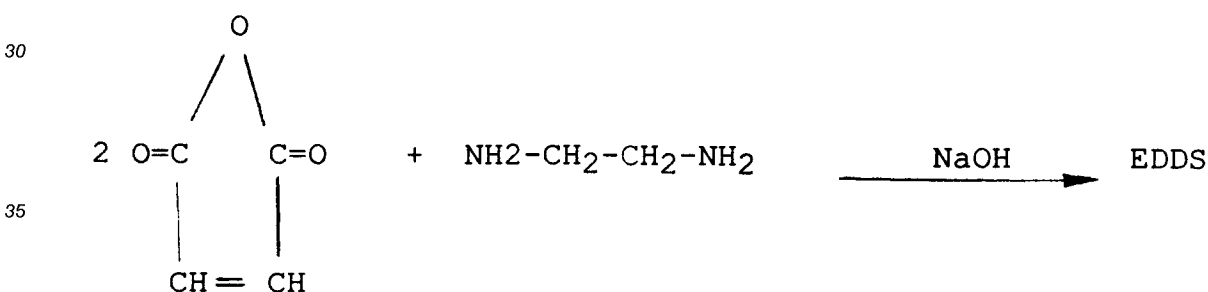

A more complete disclosure of methods for synthesising EDDS from commercially available starting materials can be found in US Patent 3,158,635, Kezerian and Ramsay, issued November 24, 1964.

The synthesis of EDDS from maleic anhydride and ethylene diamine yields a mixture of three optical isomers, [R,R], [S,S], and [S,R], due to the two asymmetric carbon atoms. The biodegradation of EDDS is optical isomerspecific, with the [S,S] isomer degrading most rapidly and extensively, and for this reason the [S,S] isomer is most preferred for inclusion in the compositions of the invention.


The [S,S] isomer of EDDS can be synthesised from L-aspartic acid and 1,2-dibromoethane, as follows :



A more complete disclosure of the reaction of L-aspartic acid with 1,2-dibromoethane to form the [S,S] isomer of EDDS can be found in Neal and Rose, Stereospecific Ligands and Their Complexes of Ethylenediaminedisuccinic Acid, *Inorganic Chemistry*, Vol 7 (1968), pp. 2405-2412.

Specific examples of carboxylates and other chelating agents which are suitable for use in the present invention are given below.


5

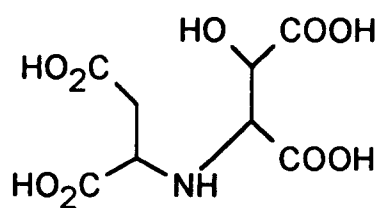

10

- Iminodiacetic acid - N- 2 -Hydroxypropyl sulphonic acid


15



20

- Aspartic acid, Ncarboxymethyl N-2 Hydroxypropyl 3 sulphonic acid.


25

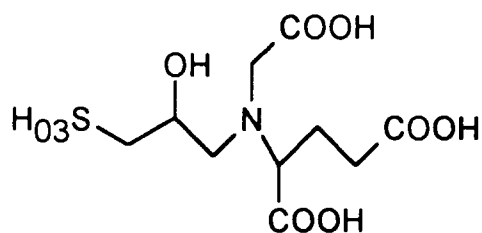

30

- beta-Alanine N,N Diacetic acid


35



40

- Aspartic acid -N,N Diacetic acid


45

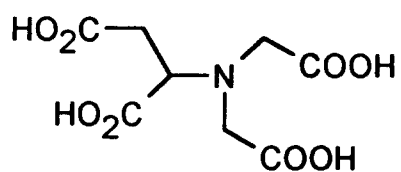

50


- Aspartic acid N-Monoacetic acid

55



- Iminodisuccinic acid


5

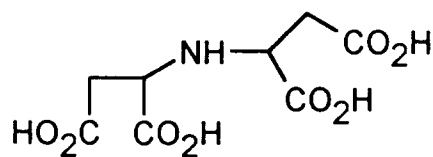

10

- Amino acid based chelating agents such as


15

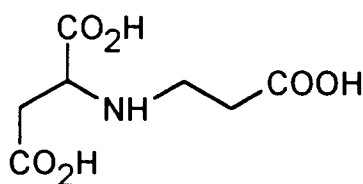

20

Iso serine di acetic acid (ISDA)


25



30

2-Phosphonobutane-1,2,4-tricarboxylic acid


35



40

GADS

45

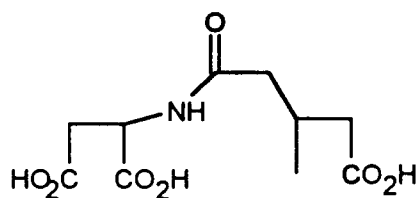

50

55 Also useful as chelating agents are: Alkyl iminodiacetic acid; dipicolinic acid; hydroxy-1,1-ethylidene diphosphonic acid (HEDP) and derivatives.

Polymers and/or Co-polymers

5 The polymers and co-polymers of the present invention may be chosen from a wide range of organic polymers, some of which also may function as builders to improve detergency. Included among such polymers may be mentioned sodium carboxy-lower alkyl celluloses, sodium lower alkyl celluloses and sodium hydroxy-lower alkyl celluloses, such as sodium carboxymethyl cellulose, sodium methyl cellulose and sodium hydroxypropyl cellulose, polyacrylates, polyaspartates and various copolymers, such as those of maleic and acrylic acids. Molecular weights for such polymers vary widely but most are within the range
10 of 2,000 to 100,000.

Polymeric polycarboxyate builders are set forth in U.S. Patent 3,308,067, Diehl, issued March 7, 1967. Such materials include the water-soluble salts of homo-and copolymers of aliphatic carboxylic acids such as maleic acid, itaconic acid, mesaconic acid, fumaric acid, aconitic acid, citraconic acid and methylenemalononic acid.

15 Most preferred for use in the present invention are copolymers of maleic and acrylic acid having a molecular weight of from 2000 to 100000, carboxymethyl cellulose and mixtures thereof.

Optional ingredients in the spray dried powder of the present invention are cationic surfactants. Useful cationic surfactants include water-soluble quaternary ammonium compounds of the form $R_4R_5R_6R_7N^+X^-$, wherein R_4 is alkyl having from 10 to 20, preferably from 12-18 carbon atoms, and R_5 is C_1 to C_{20} , R_6 and R_7 are each C_1 to C_7 alkyl preferably methyl; X^- is an anion, e.g. chloride. Examples of such trimethyl
20 ammonium compounds include C_{12-14} alkyl trimethyl ammonium chloride, C_{12-14} alkyl dimethyl ethoxy ammonium chloride and C_{12-14} alkyl trimethyl ammonium methosulfate.

Processing

25 An essential step of the process of making the spray-dried powder of the present invention is the preparation of the complex of the chelating agent with the metal ion. Preferably this is done by dissolving a salt of the metal ion into a solution of the chelating agent in the required ratios. The molar ratio of metal ion to chelating agent is preferably at least 1:1, the present invention allows molar ratios of greater than 3:1 to be prepared, most preferred is a molar ratio of about 5:1. Whilst any metal salt may be used, magnesium sulphate is most preferred.

The anionic polymer is added to the solution comprising the complex together with any other optional ingredients. The resulting slurry or solution is then spray dried by conventional means.

The most preferred method for spray drying is the use of spinning disc atomiser.

35

Manufacture of finished detergent compositions

In the most simple embodiment of the present invention, the free-flowing spray-dried powder is admixed with other detergent powders to form a finished granular detergent product. It is an important
40 advantage of the present invention that the spray-dried powder dissolves rapidly in water to release the chelating agent and polymer as early as possible into the washing process. Components of the finished detergent composition may be chosen from a very wide range of detergent active materials. Common examples include surfactants, builders, bleach, bleach activator, enzymes, optical brighteners, soil release polymers, dye transfer inhibiting agents, softening clay, perfume, etc.

45 Alternatively the spray-dried powder of the present invention may be further processed, for example by additional granulation, agglomeration, compaction steps. A particularly preferred process is described in EP 508543, published on 14th October, 1992. In this application a process is disclosed for structuring or "conditioning" a high active surfactant paste and then granulating in the presence of detergent powder. It is foreseen that the spray-dried powder may be a component either of the conditioning step, or of the granulation step, or of both steps. Using this process in combination with the spray-dried powder of the
50 present invention enables free-flowing detergent granulates to be produced having a surfactant content of at least 40% by weight, and a bulk density of at least 600 g/l.

55

EXAMPLES

(all % are by weight)

5

Example 1

The following free-flowing powder composition was prepared :

10

Acrylic / Maleic copolymer (MW = 50000)	72 %
Diethylenetriaminepenta (methylene phosphonic acid)	10 %
MgSO ₄	10 %
Water	8 %
	<u>100 %</u>

15

The composition was prepared by mixing a 40% active solution of the sodium salt of the copolymer, a 25% active solution of the phosphonic acid and the sulphate powder (MgSO₄ . 7 H₂O) to give a slurry.

The slurry was then processed through a continuous spray dryer with co-current air inlet and a rotating disc (15000 rpm) at the top of the tower. After the exit from the bottom of the tower, two fluid beds in series provide further drying and cooling of the spray dried product.

After classification (removal of fines and oversize particles) by vibrating screens, the resulting spray dried powder had a bulk density of 450 g/l (measured by the repour cup method).

25 Example 2

The following free-flowing powder composition was prepared by the same process as in example 1, except that diethylenetriaminepenta (methylene phosphonic acid) was replaced by ethylenediamine - N, N - disuccinic acid used as a 33% active solution :

30

Acrylic / Maleic copolymer (MW = 50000)	43.5 %
Ethylenediamine - N, N - Disuccinic Acid	15.5 %
MgSO ₄	31.0 %
Water	10.0 %
	<u>100 %</u>

35

The resulting powder is free flowing and has a bulk density of 460 g/l.

40 Example 3

The following free-flowing powder composition was prepared by the same process as in example 1 :

45

Acrylic / Maleic copolymer (MW = 50000)	42.0 %
Ethylenediamine - N, N - Disuccinic Acid	24.5 %
MgSO ₄	24.5 %
Water	9.0 %
	<u>100 %</u>

50

The resulting powder is free flowing and has a bulk density of 450 g/L.

55

Example 4

The following free-flowing powder composition was prepared by the same process as in example 1 :

5	Acrylic / Maleic copolymer (MW = 50000)	62.0 %
	Ethylenediamine - N, N - Disuccinic Acid	14.0 %
	MgSO ₄	14.0 %
	Water	10.0 %
10		<u>100 %</u>

The resulting powder is free flowing and has a bulk density of 430g/L.

Claims

- 15
1. A free-flowing detergent powder which is prepared by spray drying, the powder comprising :
 - (a) from 10% to 90% by weight of a complex, said complex comprising
 - (a)(i) a chelating agent and
 - (a)(ii) a metal ion selected from the group consisting of magnesium, calcium, strontium, zinc and aluminium, and mixtures thereof, characterised in that the powder further comprises
 - (b) from 10% to 90% by weight of a polymer, said polymer comprising functional groups which are anionic.
 - 20
 2. A free-flowing detergent powder according to claim 1 further characterised in that it comprises less than 20% by weight (on anhydrous basis) of inorganic components other than the metal ion (a)(ii).
 - 25
 3. A free-flowing detergent powder according to claim 2 further characterised in that it comprises less than 10% by weight (on anhydrous basis) of inorganic components other than the metal ion (a)(ii).
 - 30
 4. A free-flowing detergent powder according to any of claims 1 to 3 further characterised in that it comprises less than 10% by weight (on anhydrous basis) of aluminosilicate and carbonate.
 - 35
 5. A free-flowing detergent powder according to claim 1 wherein the chelating agent (a)(i) is selected from the group consisting of phosphonic acid, succinic acid, the salts of phosphonic or succinic acid, or mixtures thereof, and the metal ion (a)(ii) is magnesium.
 - 40
 6. A free-flowing detergent powder according to claim 5 wherein the chelating agent (a)(i) is selected from the group consisting of diethylene triamine penta (methylene phosphonic acid), or ethylenediamine-N-N'-disuccinic acid, or their salts, or mixtures thereof.
 - 45
 7. A free-flowing detergent powder according to any of claims 1 to 6 wherein the molar ratio of the metal ion (a)(ii) to the chelating agent (a)(i) is greater than 3:1.
 8. A free-flowing detergent powder according to claim 1 wherein the polymer (b) comprises carboxylate functional groups.
 - 50
 9. A free-flowing detergent powder according to claim 8 wherein the polymer (b) is selected from the group consisting of water-soluble salts of homo-and copolymers of aliphatic carboxylic acids such as acrylic acid, maleic acid, vinylic acid, itaconic acid, mesaconic acid, fumaric acid, aconitic acid, citraconic acid, methylenemalononic acid and mixtures thereof.
 - 55
 10. A free-flowing detergent powder according to claim 9 wherein the polymer (b) is a copolymer of maleic and acrylic acid having a molecular weight of from 2000 to 100 000.
 11. A free-flowing detergent powder according to claim 1, further comprising from 1% to 80% by weight of a cationic surfactant.

12. A free-flowing detergent powder according to claim 11, comprising from 2% to 20% by weight of dimethyl ethoxy ammonium chloride.

5

10

15

20

25

30

35

40

45

50

55



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	WO-A-92 09680 (PROCTER & GAMBLE) * page 8, line 17 - page 9, line 11 * * page 12, line 32 - line 36 * ---	1-10	C11D3/37 C11D11/02 C11D3/02 C11D3/33 C11D3/36
Y	FR-A-2 453 212 (UNILEVER) * page 3, line 30 - page 4, line 37 * ---	1-10	
D	& US-A-4 259 200 (...) ---		
A	US-A-4 846 993 (LENTSCH ET AL.) * column 2, line 56 - line 60 * * column 3, line 17 - line 60 * * column 5, line 54 - column 6, line 26 * ---	1-10	
A	DE-A-42 13 036 (HENKEL) * page 2, line 33 - page 3, line 28 * -----	1-10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			C11D
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		23 September 1994	Delzant, J-F
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone		T : theory or principle underlying the invention	
Y : particularly relevant if combined with another document of the same category		E : earlier patent document, but published on, or after the filing date	
A : technological background		D : document cited in the application	
O : non-written disclosure		L : document cited for other reasons	
P : intermediate document		& : member of the same patent family, corresponding document	