

(19)



(11)

EP 2 615 570 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
03.06.2020 Bulletin 2020/23

(51) Int Cl.:
G06F 21/31 (2013.01)

(21) Application number: **13157656.3**

(22) Date of filing: **16.12.2004**

(54) A METHOD FOR SECURE OPERATION OF A COMPUTING DEVICE

Verfahren zum sicheren Betrieb einer Rechnervorrichtung

Procédé pour sécuriser le fonctionnement d'un dispositif informatique

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **23.12.2003 GB 0329835**

(43) Date of publication of application:
17.07.2013 Bulletin 2013/29

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
**11189226.1 / 2 420 912
04806089.1 / 1 700 183**

(73) Proprietor: **Nokia Technologies Oy
02610 Espoo (FI)**

(72) Inventors:
• **Heath, Craig**
Hertfordshire, WD6 3NF (GB)
• **Clarke, Leon**
London E5 8HP (GB)

(74) Representative: **Cohausz & Florack**
Patent- & Rechtsanwälte
Partnerschaftsgesellschaft mbB
Postfach 10 18 30
40009 Düsseldorf (DE)

(56) References cited:
EP-A- 0 580 350 WO-A-03/007570
US-A- 5 913 025

EP 2 615 570 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method of operating a computing device, and in particular, to a method for secure operation of a computing device where a user needs to be authenticated, such as by entering a pass phrase, before the user is able to carry out a requested operation on the device. The present invention also relates to a computing device arranged to operate according to the above method and also to computer software for causing a computing device to operate in accordance with the above method. Prior art document WO03/007570-A1 discloses a method and system for processing encrypted messages at a mobile device wherein the mobile device receives an encrypted message that comprises encrypted content as well as encryption information for accessing the encrypted content. Prior art document US5913025 discloses a method for obtaining rights of a target object wherein rights comprise a validity period for a requested operation. Prior art document EP0580350-A1 discloses an access control system and method for distributed computer system using locally cached authentication credentials.

[0002] The term computing device as used herein is to be expansively construed to cover any form of electrical device and includes, data recording devices, such as digital still and movie cameras of any form factor, computers of any type or form, including hand held and personal computers, and communication devices of any form factor, including mobile phones, smart phones, communicators which combine communications, image recording and/or playback, and computing functionality within a single device, and other forms of wireless and wired information devices.

[0003] Increasingly, distributed computing systems are becoming a prevalent aspect of everyday life. Distributed computing devices are now connected by local area networks, wide area networks, and networks of networks, such as the internet. Many such networks are secured by a variety of techniques, including firewall software, routing limitations, encryption, virtual private networks, and/or other means. Computers within a security perimeter may be given ready access to data stored in the secure network, usually subject to user and group permissions, access control lists, and the like, while machines outside the perimeter are substantially or entirely denied access.

[0004] With the growth of such secure networks and their information content, there is an increasing need to support secure access by authorized users. There is also an increasing need to authenticate users because even though a user may be authorised to access a network there are certain communications over a network that are regarded to be more sensitive than others. The use of encryption and decryption techniques are increasingly being regarded as essential when carrying out any kind of sensitive transaction, such as a credit-card purchase over the internet, or the discussion of company confiden-

tial information between different remote departments in an organisation.

[0005] Pretty Good Privacy (PGP) is a computer program used to encrypt and decrypt communications over large networks such as the internet. It can also be used to send an encrypted digital signature that enables a receiver of a communication to verify the identity of a sender and know that the message was not changed en route. PGP is the one of the most widely used privacy-ensuring programs. PGP uses a variation of the public key system. In such systems, each user has a publicly known encryption key and a private key known only to that user. A message sent to a third party is encrypted using the public key for that party. When the encrypted message is received by the third party, it is decrypted using the private key for that party. Since encrypting an entire message can be relatively time-consuming, PGP uses a faster encryption algorithm to encrypt the message and then uses the public key to encrypt the shorter key that was used to encrypt the entire message. Both the encrypted message and the short key are sent to the receiver who first uses the private key of the receiver to decrypt the short key and then uses that key to decrypt the message. The use of encryption/decryption techniques are considered to be especially important in wireless communications because wireless circuits are often easier to "tap" than their hard-wired counterparts.

[0006] However, it is essential to authenticate the persons sending or accessing the encrypted data. Authentication is the process of determining whether someone or something is, in fact, who or what it is declared to be. In private and public computer networks, including the internet, authentication is commonly done through the use of logon passwords. Knowledge of the password is assumed to guarantee that the user is authentic. Each user may register initially using an assigned or self-declared password. On each subsequent use, the user must know and use the previously declared password. The weakness in this system for transactions that are significant, such as the exchange of money, is that passwords can often be stolen, accidentally revealed, or forgotten.

[0007] For encryption and decryption programs such as PGP, a pass phrase is used, in essence, as a digital signature to authenticate a person. The pass phrase does, in fact, perform two purposes - it allows the key manager software to determine that the authorised user of the software is actually present (as only that user knows the PIN or pass phrase) and it confirms that the user wishes the key to be used. Hence, the pass phrase is used to prove that the person claiming to have sent a message, or trying to gain access to an encrypted message, or trying to carry out a secure transaction such as a commercial purchase, is in fact that person. Because an improved level of security is required in comparison to that provided by a normal access password, the pass phrase is typically about 16 characters in length, and frequently these may be up to about 100 characters in

length.

[0008] If rogue software were to try to invoke the key manager in an attempt to sign a transaction which the user had not requested, then the appearance of the user interface requesting the user to authenticate himself/herself would alert the user that a third party is attempting to use his or her key, and the user would decline to authenticate himself/herself.

[0009] As outlined above, the pass phrase is usually a relatively lengthy sequence of alpha numeric characters and the repeated entry of the pass phrase each time user authentication is required is not considered to be convenient. If the pass phrase is a relatively lengthy alphanumeric sequence, or if pass phrase re-entry is requested too often, repeated authentication too frequently may even discourage the use of the encryption process by a user on occasions where its use would otherwise be considered particularly beneficial. Hence, to improve the user experience of the use of such systems, it is known not to require the user to authenticate again if the key is used a short time after a previous use of the key. This is referred as "pass phrase caching". Pass phrase caching is one way of implementing the user experience in a way such that the key is "unlocked" for a predetermined period of time. It is only after the expiry of this period of time that further use of the key will require the authentication process to be repeated.

[0010] With known authentication schemes, the pass phrase is cached for a predetermined time period; for example 30 minutes. Hence, the following sequence of events may, as an example, be required of a user in order to carry a number of secure Operations

1. A user requests to decrypt an email - Operation A.
2. The user enters his/her pass phrase (authenticates himself/herself) to decrypt and read the mail.
3. Five minutes later, the user decrypts another email - Operation A.
4. The user is not asked to re-enter the pass phrase because the pass phrase is still cached.
5. One minute later, the user signs another email - Operation B.
6. The user is not asked to re-enter the pass phrase because the pass phrase is still cached.
7. One minute later, the user signs another email - Operation B.
8. The user is not asked to re-enter the pass phrase because the pass phrase is still cached.
9. Five minutes later, the user signs another email - Operation B.
10. The user is not asked to re-enter the pass phrase because the pass phrase is still cached.
11. One hour later, the user tries to sign another email - Operation B.
12. The user re-enters the pass phrase because the cached pass phrase has expired.
13. One hour later, the user requests to decrypt another email - Operation A.

14. The user re-enters the pass phrase because the cached pass phrase has expired.

15. Ten minutes later, the user requests to carry out a financial transaction - Operation C.

16. The user is not asked to re-enter the pass phrase because the pass phrase is still cached.

[0011] It can be seen from the above example that, because the pass phrase is cached for a predetermined period of time, Operation A, Operation B or Operation C can be carried out for as long as the caching period for the pass phrase is valid because a common caching period is adopted irrespective of the operation to be carried out by the user. However, it will be appreciated that, in the above example, Operation C, involving financial expense, is more commercially sensitive than Operation B. Furthermore, Operation B, involving the generation of an email, is more sensitive than Operation A, which is limited to reading of an email. But, each can be carried out without re-entry of the pass phrase since the pass phrase is already authenticated because the caching period has not expired. Hence, to an extent, the caching of a pass phrase for a period which is considered appropriate for one type of operation may compromise security for another type of operation.

[0012] It is therefore an object of the present invention to provide an improved method for authenticating a user requiring to perform an operation on a computing device.

[0013] According to a first aspect of the present invention there is provided a method of operating a computing device, the method comprising, in response to a request from a user to carry out an operation using the device, determining the time period since the identity of the user was authenticated, and enabling the requested operation in dependence upon the determined time period and the purpose of the requested operation.

[0014] According to a second aspect of the present invention there is provided a computing device arranged to operate in accordance with a method according to the first aspect.

[0015] According to a third aspect of the present invention there is provided computer software for causing a computing device in accordance with the second aspect to operate in accordance with a method according to the first aspect.

[0016] An embodiment of the present invention will now be described, by way of further example only, with reference to figure 1, which illustrates a flow chart of a method for authenticating a user in accordance with the present invention.

[0017] Referring to figure 1, at step 2 a computing device receives a request to carry out a secure operation, which can only be completed if the user is currently authenticated, such as by entry of a pass phrase. At step 4, the computing device determines the type of operation which the user has requested. For example, the user may be requesting to carry out approval of a purchase contract with significant financial obligations, in which case it is

imperative to correctly identify the user and thus ensure that the user has the authority to commit to the financial obligations. This can be regarded as an operation requiring a high security level. Alternatively, the user may be requesting to carry out a relatively low security level operation, such as reading of an email. The type of operation being requested may be determined in a number of ways, such as by determining the type of application used to carry out the operation, the type of file required, or even by analysing the content of the request itself. Many ways of determining the type of operation will be apparent to persons familiar to this art, and it is considered that the present invention can be applied to and therefore encompasses any method which can be used to categorise requested operations.

[0018] At step 6, the computing device determines the time which has elapsed since the user was last authenticated by entering his/her pass phrase. With the present invention, the computing device then determines whether the time elapsed since authentication is acceptable for the operation being requested. This is shown as step 8 in figure 1. Taking the examples of contract approval and reading an email, as referred to above, the reading of the email is a relatively low level secure operation and hence the 'standard' caching period, say one hour, is considered to be acceptable. The time period elapsed since the last authentication is determined to be less than one hour and the pass phrase, and thus the identity of the user, is considered to be authentic. Therefore, the operation is enabled and this is shown as step 10 in figure 1. However, for the contract approval operation, the system has been arranged such that for this type of operation the caching period expires upon the completion of the previous operation of the same type. Hence, in this example the computing device determines at step 8 that the time elapsed since the last authentication is not valid for the requested operation and requests, at step 12 of figure 1, for the user to re-enter his/her pass phrase in order to authenticate the user for the particular contract approval operation. If the pass phrase is entered correctly, the user is authenticated and the time period is determined to be acceptable at step 8 and this high level secure operation is then enabled. After enabling the requested operation, the process ends at step 14. It can be seen that the above process provides a more secure environment, but still enables one pass phrase to control the use of all keys.

[0019] The following example shows how the present invention may be used for two similar but more obviously distinct operations. Operation A is "decrypt and view my calendar entries for today", and Operation B is "sign a transaction to purchase a book". Operation A is in all probability going to be requested by the user many times during each working day and hence would be very annoying if the user has to type in his/her pass phrase every time the user wishes to consult the calendar entries for the day concerned. In essence, the user should only be required to enter his/her pass phrase once or possibly

twice a day to carry out this operation. On the other hand, Operation B is costing money, so the user will want to make ensure that a third party who may gain access to the computing device, which may be in the form of a mobile phone, cannot carry out any financial transaction, such as the purchase of books, so a relatively short caching time is set for this type of operation. But, suppose the user wishes to purchase three books from three suppliers in relatively quick succession, then the user does not want to have to enter his/her pass phrase for each transaction, but nevertheless requires to have a higher level of security than that provided by the caching time set for his/her calendar. In fact the user may want his/her pass phrase to permit use of Operation B for a relatively short time, say 3 minutes. So, in the present invention, the above operations may be conducted as follows:

1. The user asks to view his/her calendar - Operation A.
2. The user enters his/her pass phrase.
3. Five minutes later, the user views another day in the calendar - Operation A.
4. Because the pass phrase was entered less than one day ago and is within the caching period, the user is not prompted for his/her pass phrase.
5. One minute later, the user requests to buy a book - Operation B.
6. Because the pass phrase was last entered more than 3 minutes ago, the user IS asked to re-enter the pass phrase. This is different behaviour and is good security.
7. One minute later the user buys another book - Operation B.
8. The user is not asked to re-enter the pass phrase because the pass phrase was last entered less than 3 minutes ago.
9. Five minutes later the user buys another book - Operation B.
10. The user IS asked to re-enter the pass phrase because it was last entered more than 3 minutes ago - different behaviour for Operation B, with improved security with use of the same password.
11. One hour later the user buys another book - Operation B.
12. The user is requested to re-enter the pass phrase.
13. One hour later the user requests to view calendar entries - Operation A.
14. The user IS NOT requested to re-enter the pass phrase because it was last entered less than one day ago) - different behaviour to Operation B, providing a requisite level of security with good user convenience.

[0020] In summary, the user is asked for his/her pass phrase only when it considered necessary according to the security of the operation that is about to be carried out and the time that has elapsed since the pass phrase

was last entered, and not mechanically upon a time period fixed for a caching period which does not relate to the operations which may be carried out during the caching period. It is envisaged that the user will select the categories of operations, and the associated elapsed time periods so that the user may arrange never to have to re-enter the pass phrase in rapid succession.

[0021] Although the present invention has been described with reference to a particular embodiment, it will be appreciated that modifications may be effected whilst remaining within the scope of the present invention as defined by the appended claims. For example, in the embodiment described above, the elapsed time is determined from the last or immediately preceding entry of the pass phrase. However, this elapsed time may also be determined from a previous entry of the pass phrase which is not necessarily the last entry. Furthermore, the invention has been described with reference to the use of pass phrases. However, other methods for authenticating the user may also be employed, such as the use of pass words or PINs (Personal Identification Numbers), and/or biometric data, such as fingerprint or iris recognition.

[0022] Further disclosure of the invention is provided in the following numbered clauses.

1. A method of operating a computing device, the method comprising, in response to a request from a user to carry out an operation using the device, determining the time period since the identity of the user was authenticated, and enabling the requested operation in dependence upon the determined time period and the purpose of the requested operation.

2. A method according to clause 1 wherein the identity of the user is authenticated using a pass phrase.

3. A method according to clause 1 wherein the identity of the user is authenticated using biometric information.

4. A method according to any one of clauses 1 to 3 comprising determining the time period since the identity of the user was last authenticated.

5. A method according to any one of the preceding clauses wherein the requested operation is enabled if the determined time period is less than or equal to a time period set by the user.

6. A method according to clause 5 wherein the time period set for one type of operation is a multiple of a time period set for another type of operation.

7. A method according to clause 5 wherein the time period for a type of operation is arranged to expire upon completion of the immediately preceding operation of the same type.

8. A method according to any one of the preceding clauses wherein categories of operations used to determine the purpose for a requested operation are set by the user.

9. A computing device arranged to operate in accordance with a method as defined in any one of clauses 1 to 8.

10. A computing device according to clause 9 comprising a mobile phone.

11. Computer software arranged to cause a computing device as defined in clause 9 or 10 to operate in accordance with a method as defined in any one of clauses 1 to 8.

Claims

1. A method of operating a computing device, the method comprising:
in response to a request (2) from a user to carry out an operation using the device:

determining (6) an elapsed time period that has elapsed since the identity of the user was authenticated;

determining a time period associated with a type of the requested operation; and

enabling the requested operation if the elapsed time period is within the time period associated with the type of the requested operation,

characterized in that

the time period associated with one type of the requested operation is arranged to expire upon completion of the immediately preceding operation of the same type.

2. A method according to claim 1 wherein the identity of the user is authenticated using a pass phrase.

3. A method according to claim 1 wherein the identity of the user is authenticated using biometric information.

4. A method according to any one of the preceding claims wherein the time period associated with the type of the requested operation is a time period set by the user.

5. A method according to any one of the preceding claims wherein the time period associated with one type of operation is a multiple of a time period set for another type of operation.

6. A method according to any one of the preceding claims, further comprising prompting to authenticate

the user's identity in order to enable the requested operation if the elapsed time period is not within the time period associated with the type of the requested operation.

7. A computing device comprising means for performing:
in response to a request (2) from a user to carry out an operation using the device:

determining (6) an elapsed time period that has elapsed since the identity of the user was authenticated;

determining a time period associated with a type of the requested operation; and
enabling the requested operation if the elapsed time period is within the time period associated with the type of the requested operation,

characterized in that

the time period associated with one type of the requested operation is arranged to expire upon completion of the immediately preceding operation of the same type.

8. The computing device according to claim 7 wherein the identity of the user is authenticated using a pass phrase or wherein the identity of the user is authenticated using biometric information.

9. The computing device according to claim 7 or claim 8 wherein the time period associated with the type of the requested operation is a time period set by the user.

10. The computing device according to any of the claims 7 to 9, the computing device comprising further means for performing:
prompting to authenticate the user's identity in order to enable the requested operation if the elapsed time period is not within the time period associated with the type of the requested operation.

11. A computing device according to any of the claims 7 to 10 comprising at least one of a mobile phone, a data recording device, a digital still camera, a movie camera, a computer, a handheld computer, a personal computer, and a communication device.

12. Computer software arranged to cause a computing device as defined in any of the claims 7 to 11 for performing:
in response to a request (2) from a user to carry out an operation using the device:

determining (6) an elapsed time period that has elapsed since the identity of the user was authenticated;

determining a time period associated with a type

of the requested operation; and
enabling the requested operation if the elapsed time period is within the time period associated with the type of the requested operation,

characterized in that

the time period associated with one type of the requested operation is arranged to expire upon completion of the immediately preceding operation of the same type.

Patentansprüche

1. Verfahren zum Betreiben einer Computervorrichtung, wobei das Verfahren umfasst:
in Reaktion auf eine Anforderung (2) von einem Benutzer, eine Operation unter Verwendung der Vorrichtung auszuführen:

Bestimmen (6) einer verstrichenen Zeitspanne, die verstrichen ist, seitdem die Identität des Benutzers authentifiziert wurde;

Bestimmen einer Zeitspanne, die mit einer Art der angeforderten Operation verknüpft ist; und
Ermöglichen der angeforderten Operation, falls die verstrichene Zeitspanne innerhalb der Zeitspanne liegt, die mit der Art der angeforderten Operation verknüpft ist,

dadurch gekennzeichnet, dass

die Zeitspanne, die mit einer Art der angeforderten Operation verknüpft ist,
dafür ausgelegt ist, bei Abschluss der unmittelbar vorangehenden Operation derselben Art zu verstreichen.

2. Verfahren gemäß Anspruch 1, wobei die Identität des Benutzers unter Verwendung einer Passphrase authentifiziert wird.

3. Verfahren gemäß Anspruch 1, wobei die Identität des Benutzers unter Verwendung biometrischer Informationen authentifiziert wird.

4. Verfahren gemäß einem der vorstehenden Ansprüche, wobei die Zeitspanne, die mit der Art der angeforderten Operation verknüpft ist, eine Zeitspanne ist, die vom Benutzer eingestellt wird.

5. Verfahren gemäß einem der vorstehenden Ansprüche, wobei die Zeitspanne, die mit einer Art von Operation verknüpft ist, ein Vielfaches einer Zeitspanne ist, die für eine andere Art von Operation eingestellt ist.

6. Verfahren gemäß einem der vorstehenden Ansprüche, ferner umfassend das Auffordern, die Identität des Benutzers zu authentifizieren, um die angeforderte Operation zu ermöglichen, falls die verstriche-

ne Zeitspanne nicht innerhalb der Zeitspanne liegt, die mit der Art der angeforderten Operation verknüpft ist.

7. Computervorrichtung, umfassend Mittel zum Durchführen von:
in Reaktion auf eine Anforderung (2) von einem Benutzer, eine Operation unter Verwendung der Vorrichtung auszuführen:
 - Bestimmen (6) einer verstrichenen Zeitspanne, die verstrichen ist, seitdem die Identität des Benutzers authentifiziert wurde;
 - Bestimmen einer Zeitspanne, die mit einer Art der angeforderten Operation verknüpft ist; und
 - Ermöglichen der angeforderten Operation, falls die verstrichene Zeitspanne innerhalb der Zeitspanne liegt, die mit der Art der angeforderten Operation verknüpft ist,
 - dadurch gekennzeichnet, dass** die Zeitspanne, die mit einer Art der angeforderten Operation verknüpft ist, dafür ausgelegt ist, bei Abschluss der unmittelbar vorangehenden Operation derselben Art zu verstreichen.
8. Computervorrichtung gemäß Anspruch 7, wobei die Identität des Benutzers unter Verwendung einer Passphrase authentifiziert wird oder wobei die Identität des Benutzers unter Verwendung biometrischer Informationen authentifiziert wird.
9. Computervorrichtung gemäß Anspruch 7 oder Anspruch 8, wobei die Zeitspanne, die mit der Art der angeforderten Operation verknüpft ist, eine Zeitspanne ist, die vom Benutzer eingestellt wird.
10. Computervorrichtung gemäß einem der Ansprüche 7 bis 9, wobei die Computervorrichtung ferner Mittel umfasst zum Durchführen von:
 - Auffordern zum Authentifizieren der Identität des Benutzers, um die angeforderte Operation zu ermöglichen, falls die verstrichene Zeitspanne nicht innerhalb der Zeitspanne liegt, die mit der Art der angeforderten Operation verknüpft ist.
11. Computervorrichtung gemäß einem der Ansprüche 7 bis 10, umfassend wenigstens eines von einem Mobiltelefon, einer Datenaufzeichnungsvorrichtung, einer digitalen Fotokamera, einer Filmkamera, einem Computer, einem Handheld-Computer, einem Personalcomputer und einer Kommunikationsvorrichtung.
12. Computersoftware, die dafür ausgelegt ist, eine Computervorrichtung wie in einem der Ansprüche 7 bis 11 definiert zu veranlassen, Folgendes durchzuführen:

in Reaktion auf eine Anforderung (2) von einem Benutzer, eine Operation unter Verwendung der Vorrichtung auszuführen:

Bestimmen (6) einer verstrichenen Zeitspanne, die verstrichen ist, seitdem die Identität des Benutzers authentifiziert wurde;
Bestimmen einer Zeitspanne, die mit einer Art der angeforderten Operation verknüpft ist; und
Ermöglichen der angeforderten Operation, falls die verstrichene Zeitspanne innerhalb der Zeitspanne liegt, die mit der Art der angeforderten Operation verknüpft ist,
dadurch gekennzeichnet, dass
die Zeitspanne, die mit einer Art der angeforderten Operation verknüpft ist, dafür ausgelegt ist, bei Abschluss der unmittelbar vorangehenden Operation derselben Art zu verstreichen.

Revendications

1. Procédé d'exploitation d'un dispositif informatique, le procédé comprenant :
en réponse à une requête (2), émanant d'un utilisateur, de réaliser une opération à l'aide du dispositif :
 - la détermination (6) d'une période de temps écoulée qui s'est écoulée depuis que l'identité de l'utilisateur a été authentifiée ;
 - la détermination d'une période de temps associée à un type de l'opération requise ; et
 - l'autorisation de l'opération requise si la période de temps écoulée s'inscrit dans la période de temps associée au type de l'opération requise, **caractérisé en ce que** la période de temps associée à un certain type de l'opération requise est conçue pour expirer dès l'achèvement de l'opération immédiatement précédente du même type.
2. Procédé selon la revendication 1, dans lequel l'identité de l'utilisateur est authentifiée à l'aide d'une phrase de passe.
3. Procédé selon la revendication 1, dans lequel l'identité de l'utilisateur est authentifiée à l'aide d'informations biométriques.
4. Procédé selon l'une quelconque des revendications précédentes, dans lequel la période de temps associée au type de l'opération requise est une période de temps fixée par l'utilisateur.
5. Procédé selon l'une quelconque des revendications précédentes, dans lequel la période de temps associée à un certain type d'opération est un multiple

d'une période de temps fixée pour un autre type d'opération.

6. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre l'invitation à authentifier l'identité de l'utilisateur afin d'autoriser l'opération requise si la période de temps écoulée ne s'inscrit pas dans la période de temps associée au type de l'opération requise. 5
7. Dispositif informatique, comprenant des moyens pour exécuter :
en réponse à une requête (2), émanant d'un utilisateur, d'accomplir une opération à l'aide du dispositif : 10
 - la détermination (6) d'une période de temps écoulée qui s'est écoulée depuis que l'identité de l'utilisateur a été authentifiée ;
 - la détermination d'une période de temps associée à un type de l'opération requise ; et 20
 - l'autorisation de l'opération requise si la période de temps écoulée s'inscrit dans la période de temps associée au type de l'opération requise, **caractérisé en ce que**
 - la période de temps associée à un certain type de l'opération requise est conçue pour expirer dès l'achèvement de l'opération immédiatement précédente du même type. 25
8. Dispositif informatique selon la revendication 7, dans lequel l'identité de l'utilisateur est authentifiée à l'aide d'une phrase de passe, ou dans lequel l'identité de l'utilisateur est authentifiée à l'aide d'informations biométriques. 30
9. Dispositif informatique selon la revendication 7 ou la revendication 8, dans lequel la période de temps associée au type de l'opération requise est une période de temps fixée par l'utilisateur. 35
10. Dispositif informatique selon l'une quelconque des revendications 7 à 9, lequel dispositif informatique comprend en outre des moyens pour exécuter :
l'invitation à authentifier l'identité de l'utilisateur afin d'autoriser l'opération requise si la période de temps écoulée ne s'inscrit pas dans la période de temps associée au type de l'opération requise. 40
11. Dispositif informatique selon l'une quelconque des revendications 7 à 10, comprenant au moins un élément dans le groupe constitué par un téléphone mobile, un dispositif d'enregistrement de données, un appareil photo numérique, une caméra, un ordinateur, un ordinateur de poche, un ordinateur personnel et un dispositif de communication. 50
12. Logiciel d'ordinateur conçu pour amener un dispositif informatique tel que défini dans l'une quelconque 55

des revendications 7 à 11 à exécuter :

en réponse à une requête (2), émanant d'un utilisateur, de réaliser une opération à l'aide du dispositif :

la détermination (6) d'une période de temps écoulée qui s'est écoulée depuis que l'identité de l'utilisateur a été authentifiée ;
la détermination d'une période de temps associée à un type de l'opération requise ; et
l'autorisation de l'opération requise si la période de temps écoulée s'inscrit dans la période de temps associée au type de l'opération requise, **caractérisé en ce que**
la période de temps associée à un certain type de l'opération requise est conçue pour expirer dès l'achèvement de l'opération immédiatement précédente du même type.

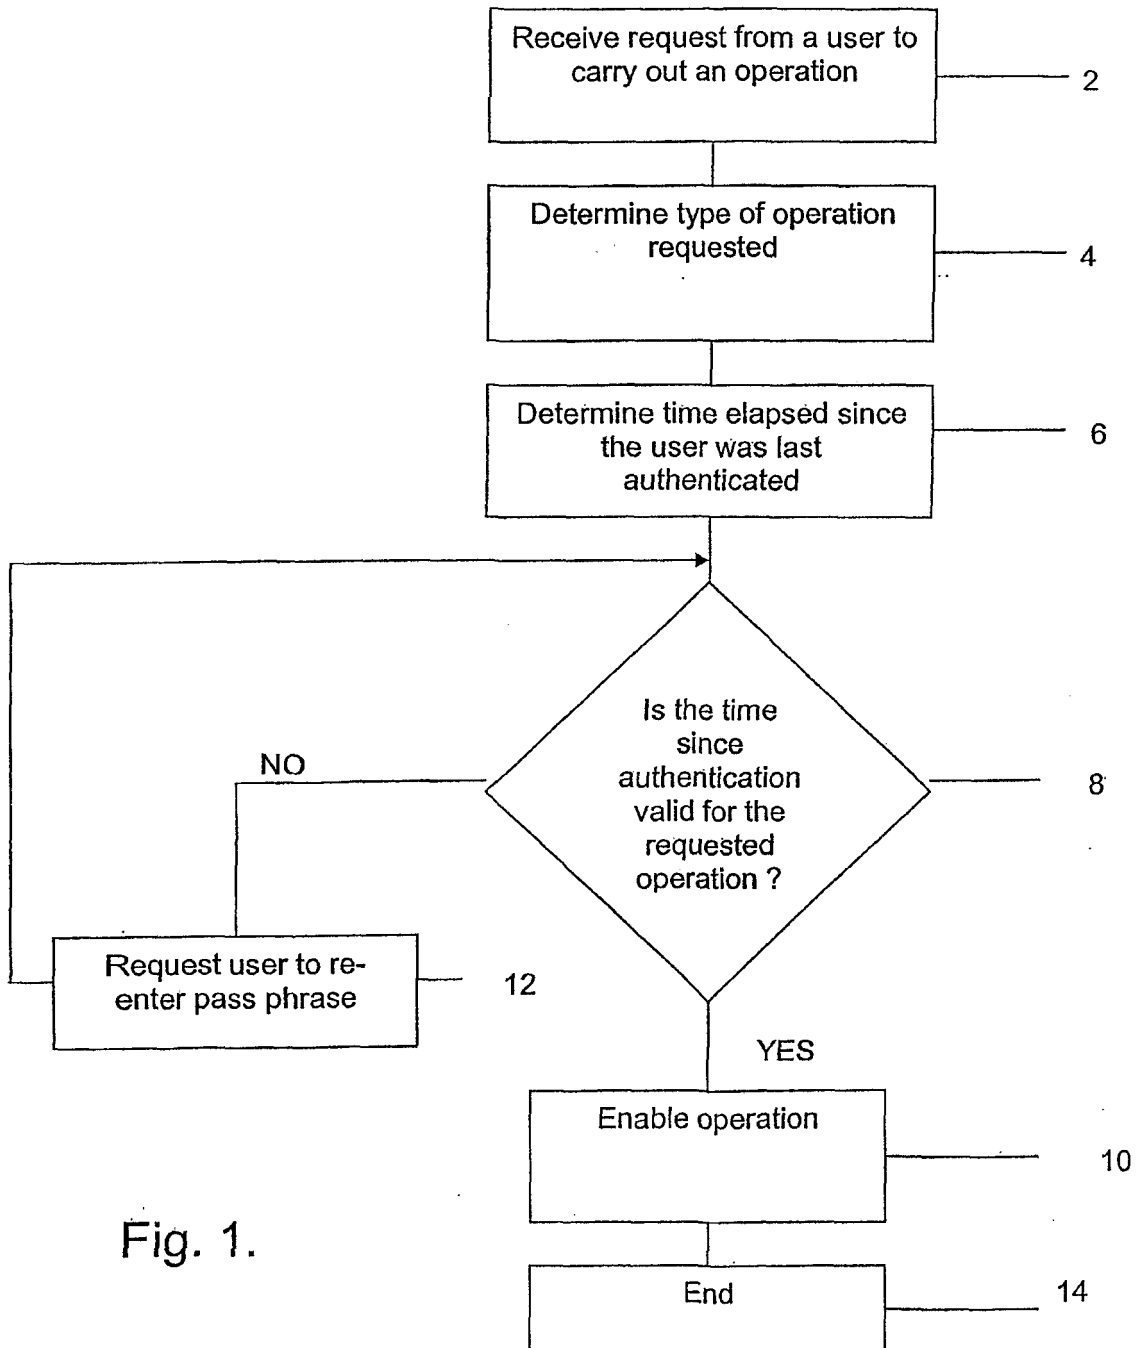


Fig. 1.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 03007570 A1 [0001]
- US 5913025 A [0001]
- EP 0580350 A1 [0001]