

# (11) EP 2 868 338 A1

(12)

# **EUROPEAN PATENT APPLICATION**

(43) Date of publication: **06.05.2015 Bulletin 2015/19** 

(21) Application number: 13191199.2

(22) Date of filing: 31.10.2013

(51) Int Cl.:

A61M 5/32 (2006.01)

A61M 5/315 (2006.01)

A61M 5/31 (2006.01)

A61M 5/24 (2006.01) A61M 5/46 (2006.01)

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

Designated Extension States:

**BA ME** 

- (71) Applicant: Sanofi-Aventis Deutschland GmbH 65929 Frankfurt am Main (DE)
- (72) Inventor: The designation of the inventor has not yet been filed

# (54) Medicament delivery device

(57) Described is a medicament delivery device (1) comprising a body (2), a container carrier (7) slidably disposed in the body (2), and a sleeve (6) slidably coupled to the container carrier (7).

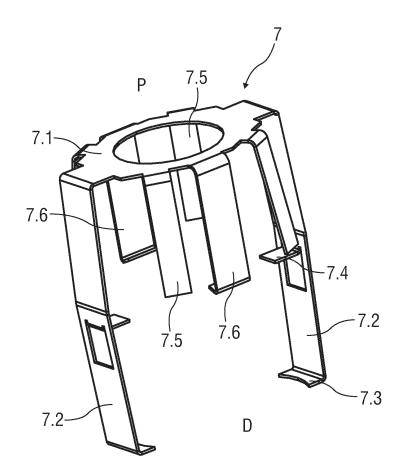


FIG 3

EP 2 868 338 A1

#### Technical Field

[0001] The invention relates to a medicament delivery device.

1

#### Background of the Invention

**[0002]** Administering an injection is a process which presents a number of risks and challenges for users and healthcare professionals, both mental and physical. Prefilled syringes that are filled with a selected dosage of a medicament for administering the medicament to a patient are known in the art. Conventional medicament delivery devices comprising a needle safety system for preventing needle stick injuries are also known.

**[0003]** There remains a need for an improved medicament delivery device.

#### Summary of the Invention

**[0004]** It is an object of the present invention to provide an improved medicament delivery device.

**[0005]** The object is achieved by a medicament delivery device according to claim 1.

**[0006]** Exemplary embodiments of the invention are given in the dependent claims.

[0007] In an exemplary embodiment, a medicament delivery device according to the present invention comprises a body, a container carrier slidably disposed in the body, and a sleeve slidably coupled to the container carrier. The container carrier includes at least one first leg having a first protrusion and a second protrusion proximal of the first protrusion. The sleeve includes a collar adapted to abut the first protrusion and the second protrusion.

[0008] In an exemplary embodiment, the container carrier includes at least one second leg biased radially outward. The body includes at least one axial stop adapted to axially abut the at least one second leg.

[0009] In an exemplary embodiment, the container carrier includes at least one third leg biased radially outward. The sleeve includes at least one sleeve leg adapted to radially abut the at least one third leg when the sleeve is in a retracted position relative to the body. The at least one third leg is adapted to axially abut the at least one sleeve leg to lock the sleeve is in an extended position relative to the body.

**[0010]** In an exemplary embodiment, the at least one first leg, the at least one second leg and the at least one third leg are coupled to a periphery of a proximal portion of the container carrier, and the at least one first leg, the at least one second leg and the at least one third leg extend in a distal direction from the proximal portion.

**[0011]** In an exemplary embodiment, the medicament delivery device further comprises a plunger rod disposed within the body. The plunger rod is fixed to the body.

[0012] In an exemplary embodiment, the medicament

delivery device further comprises a sleeve spring biasing the sleeve relative to the container carrier. The sleeve spring biases the sleeve toward the first protrusion.

**[0013]** In an exemplary embodiment, the medicament delivery device further comprises a container spring biasing the carrier relative to the body.

**[0014]** In an exemplary embodiment, the sleeve includes one or more sleeve windows.

**[0015]** In an exemplary embodiment, the medicament delivery device further comprises a cap removably coupled to the body. The cap includes a viewing window. The cap includes one or more indicia indicating an intended orientation of the device.

**[0016]** In an exemplary embodiment, the medicament delivery device further comprises a container including a medicament. The proximal portion of the container carrier is adapted to receive the container.

**[0017]** Further scope of applicability of the present invention will become apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating exemplary embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

#### Brief Description of the Drawings

**[0018]** The present invention will become more fully understood from the detailed description given hereinbelow and the accompanying drawings which are given by way of illustration only, and thus, are not limitive of the present invention, and wherein:

Figure 1 is a schematic perspective view of an exemplary embodiment of a medicament delivery device prior to use.

40 Figure 2 is a schematic longitudinal section of an exemplary embodiment of a medicament delivery device prior to use,

Figure 3 is a schematic perspective view of an exemplary embodiment of a container carrier according to the present invention,

Figure 4 is a schematic longitudinal section of an exemplary embodiment of a medicament delivery device prior to use,

Figure 5 is a schematic longitudinal detail section of an exemplary embodiment of a medicament delivery device during use,

Figure 6 is a schematic longitudinal section of an exemplary embodiment of a medicament delivery device during use,

2

50

Figure 7 is a longitudinal detail section of an exemplary embodiment of a medicament delivery device during use,

Figure 8 is a schematic longitudinal section of an exemplary embodiment of a medicament delivery device during use, and

Figure 9 is a schematic longitudinal section of an exemplary embodiment of a medicament delivery device after use.

**[0019]** Corresponding parts are marked with the same reference symbols in all figures.

#### **Detailed Description**

**[0020]** Figure 1 is a perspective view of an exemplary embodiment of a medicament delivery device 1 according to the present invention. The medicament delivery device 1 comprises a body 2 which may be generally cylindrical. In an exemplary embodiment, a cap 3 may be removably coupled to the body 2. The cap 3 may include a viewing window 4 (e.g., an opening or a substantially transparent piece of material). The cap 3 may further include one or more indicia 5 for providing a visual and/or tactile indication of use (e.g., which end of the device 1 should be applied to an injection site, etc.). For example, in an exemplary embodiment, the indicia 5 include one or more arrows (painted or embossed) pointing toward a distal end of the device 1.

**[0021]** Figure 2 is a longitudinal section of an exemplary embodiment of a medicament delivery device 1 according to the present invention. A sleeve 6 is slidably coupled to the body 2. For example, the sleeve 6 may be telescoped within the body 2. In an exemplary embodiment, the sleeve 6 comprises one or more lateral sleeve windows 6.2 adapted to axially align with the viewing windows 4 (e.g., an opening or a substantially transparent piece of material) in the cap 3 when the sleeve 6 is in an extended position (as shown in Figure 2) relative to the body 2.

[0022] In an exemplary embodiment, a container carrier 7 slidably disposed in the body 2. The container carrier 7 is adapted to retain a medicament container, e.g., a syringe 8, an ampoule, a cartridge, etc. For example, the syringe 8 includes a syringe barrel 8.2 arranged as a hollow cylinder defining a cavity 8.3 for receiving a medicament. A needle 9 is arranged at a distal end of the syringe barrel 8.2 in a manner to be in fluid communication with the cavity 8.3. A stopper 10 is disposed within the syringe barrel 8.2 for proximally limiting the cavity 8.3. The stopper 10 may be displaced within the syringe barrel 8.2 for ejecting the medicament from the cavity 8.3 through the needle 9.

**[0023]** Figure 3 shows an exemplary embodiment of a container carrier 7 according to the present invention. The container carrier 7 comprises a proximal portion 7.1

adapted to engage the medicament container. For example, the proximal portion 7.1 may support a flange 8.1 on a syringe barrel 8.2 of the syringe 8 such that the syringe 8 is prevented from moving in the distal direction D relative to the carrier 7. One or more first legs 7.2 extend distally from the proximal portion 7.1. In an exemplary embodiment, the first leg 7.2 comprises a radially inwardly directed first protrusion 7.3 arranged on a distal end of the first leg 7.2 and a radially inwardly directed second protrusion 7.4 proximal of the first protrusion 7.3. The first protrusion 7.3 and the second protrusion 7.4 are adapted to abut a collar 6.1 on the sleeve 6 for limiting axial movement of the sleeve 6 relative to the carrier 7. The first leg 7.2 is adapted to distally abut a first axial stop 2.1 in the body 2 limiting movement of the carrier 7 in the distal direction relative to the body 2.

[0024] One or more second legs 7.5 extend distally from the proximal portion 7.1. The second leg 7.5 is biased radially outward. The second leg 7.5 is adapted to engage one or more first ribs 2.2 (Figure 5) in the body 2. [0025] One or more third legs 7.6 extend distally from the proximal portion 7.1. The third leg 7.6 is biased radially outward. The third leg 7.5 is adapted to engage one or more second ribs 2.4 (Figure 9) in the body 2.

[0026] In an exemplary embodiment, the sleeve 6 comprises one or more sleeve legs 6.3 extending in the proximal direction P beyond the collar 6.1. The sleeve legs 6.3 are adapted to radially outwardly support the third legs 7.6 of the carrier 7 such that they cannot deflect radially outwards depending on the axial position of the sleeve 6 relative to the carrier 7, as explained below with regard to Figure 8.

**[0027]** Referring again to figure 2, a piston rod 11 is arranged within the body 2 in a manner to engage the stopper 10 for displacing it within the syringe barrel 8.2. In an exemplary embodiment, the piston rod 11 is attached to the body 2, preventing relative movement between the piston rod 11 and the body 2. In an exemplary embodiment the piston rod 11 may be integrally shaped with the body 2, or in another exemplary embodiment, the piston rod 11 may be secured to the body 2 by latches 11.2 (shown in Figure 4). In an exemplary embodiment, prior to use, an axial gap may be present between a distal end of the piston rod 11 and a proximal end of the stopper 10. The axial gap may prevent force being applied to the stopper 10 prior to use.

[0028] In an exemplary embodiment, a sleeve spring 12 is arranged between the carrier 7 and the sleeve 6 in a manner biasing the sleeve 6 in the distal direction D relative to the carrier 7 such that the collar 6.1 of the sleeve 6 abuts the first protrusion 7.3 of the carrier 7.

**[0029]** In an exemplary embodiment, a container spring 13 is arranged over the piston rod 11 between a proximal end face 11.1 of the piston rod 11 and the proximal flange 8.1 of the syringe 8 thus biasing the syringe 8 in the distal direction D relative to the piston rod 11 and body 2.

[0030] In an exemplary embodiment, a protective nee-

55

40

25

40

45

dle shield 14 is arranged over the needle 9. The cap 3 is adapted to engage (e.g., by a barb, hook, latch, etc.) the needle shield 14 in manner to remove it from the needle 9 once the cap 3 is removed from the body 2 by pulling it in the distal direction D. A snap feature 2.6 may be arranged on the body 2 for snap fitting the cap 3 to the body 2.

**[0031]** In order to perform an injection, the medicament delivery device 1 may be operated according to the following exemplary steps.

**[0032]** The cap 3 is pulled in the distal direction D relative to the body 2 thereby also pulling the protective needle shield 14 off the needle 9. The syringe 8 is prevented from moving in the distal direction D as its proximal flange 8.1 abuts the proximal portion 7.1 of the carrier 7, and the carrier 7 is prevented from moving in the distal direction D as the first leg 7.1 of the carrier 7 distally abuts a first axial stop 2.1 in the body 2. The collar 6.1 on the sleeve 6 distally abuts the first protrusion 7.3 on the first leg 7.2 such that the sleeve 6 is also prevented from moving in the distal direction D.

[0033] Figure 4 is a schematic longitudinal section of an exemplary embodiment of a medicament delivery device 1 according to the present invention prior to use. The needle 9 is located within the sleeve 6 preventing a user from touching and seeing it. In this state the medicament delivery device 1 may be held at the body 2 and the sleeve 6 may be pushed against an injection site, e.g. a patient's skin. Consequently the sleeve 6 moves in the proximal direction P relative to the body 2 against the force of both the sleeve spring 12 and the container spring 13. The sleeve spring 12 and the container spring 13 are selected such that a spring force of the sleeve spring 12 is less than a spring force of the container spring 13. Due to the movement of the sleeve 6 in the proximal direction P, the sleeve spring 12 will be compressed as the collar 6.1 of the sleeve 6 disengages the first protrusion 7.3 and moves towards the second protrusion 7.4, allowing the sleeve 6 to retract into the body 2. The carrier 7 and the syringe 8 remain in position (abutting the first axial stop 2.1) due to the force of the container spring 13. As the syringe 8 and the needle 9 stay in position relative to the body 2 while the sleeve 6 moves in the proximal direction P, a distal tip of the needle 9 is exposed beyond a distal end of the sleeve 6 and inserted into the injection site. Once the collar 6.1 abuts the second protrusion 7.4, movement of the sleeve 6 in the proximal direction P relative to the carrier 7 stops. The needle 9 has reached its insertion depth. Any further movement of the sleeve 6 relative to the body 2 in the proximal direction P causes the carrier 7 with the syringe 8 to move proximally relative to the body 2, because the collar 6.1 pushes the second protrusion 7.4. This proximal movement thus compresses the container spring 13. As the piston rod 11 is coupled to the body 2, this proximal movement causes the piston rod 11 to abut the stopper 10 and displace it within the syringe barrel 8.2 ejecting the medicament from the cavity 8.3 through the needle 9 into the injection site. A feedback may be provided to the user to indicate that dispensing of the medicament is being initiated. For example, a tactile feedback may be provided in the form of an increased resistance as the container spring 13 compresses.

[0034] As shown in Figures 5 and 7, as the carrier 7 and the syringe 8 move proximally relative to the body 2, the second legs 7.5 are radially outwardly abutted by one or more first ribs 2.2. When the carrier 7 has travelled a sufficient proximal distance relative to the body 2, the second legs 7.5 deflect radially outward and may abut a second axial stop 2.3 on a proximal end of the first rib 2.2. Due to the second axial stop 2.3, the carrier 7 is prevented from moving in the distal direction D relative to the body 2. A third axial stop 2.5 may be disposed in the body 2 proximal of the second axial stop 2.3. When the second legs 7.5 proximally pass the third axial stop 2.5, the second legs 7.5 may deflect radially outward to abut the third axial stop 2.5 and prevent the carrier 7 from moving distally relative to the body 2. Those of skill in the art will understand that any number of axial stops may be formed in the body 2. Further, the axial stop may be formed as a rib with a transverse abutment surface or as a ramped surface with a transverse abutment surface. In an exemplary embodiment, a feedback (e.g., tactile and/or audible) may be provided when the carrier 7 proximally passes an axial stop. For example, when the second legs 7.5 deflect radially outward after proximally passing an axial stop, the second legs 7.5 may impact the body 2 generating a tactile feedback (e.g., a vibration) and/or an audible feedback (e.g., a 'click' sound). If the medicament delivery device 1 is removed from the injection site, the carrier 7 would travel in the distal direction D relative to the body 2 until the second legs 7.5 engage an axial stop, and the sleeve 6 would travel distally relative to the carrier 7 until the collar 6.1 abuts the first protrusion 7.3. Thus, the needle 9 would be covered again by the sleeve 6 despite the changed axial position of the carrier 7 and the syringe 8 relative to the body 2. [0035] Figure 6 is a schematic view of the medicament delivery device 1 during use. An overall length of the medicament delivery device 1 is shorter than in an initial state, and the sleeve window 6.2 is partially hidden within the body 2 thus providing a visual indication that the medicament delivery device 1 has been used. If the medicament delivery device 1 is in this state, it can be re-applied against the injection site (or a different injection site) and the medicament delivery. For example, a dose of a medicament may need to be administered in at two different injection sites. Thus, the medicament delivery device 1 could be used to administer a first partial dose at a first injection site. A feedback provided by the second legs 7.5 and an axial stop may indicate that the first partial dose is complete. The medicament delivery device 1 could then be relocated (with the distal tip of the needle 9 covered by the sleeve 6) to a second injection site to deliver a second partial dose. Due to the sleeve spring

12 being weaker than the container spring 13, the sleeve

35

40

45

6 will again move relative to the carrier 7 thus inserting the needle 9 into the injection site before the syringe 8 and carrier 7 move relative to the body 2 for delivering the medicament.

[0036] As shown in Figure 8, as the body 2 is pressed further against the injection site, the piston rod 11 will displace the stopper 10 until the stopper 10 bottoms out within the syringe 8 (or delivers the intended dose). At this point the force opposing the movement of the body 2 in the distal direction D relative to the sleeve 6 considerably increases providing a tactile feedback to indicate that the injection is finished. The second legs 7.5 may engage an axial stop (e.g., third axial stop 2.5) to prevent the carrier 7 from moving distally relative to the body 2. [0037] As shown in Figure 9, when the medicament delivery device 1 is removed from the injection site, the sleeve spring 12 returns the sleeve 6 in the distal direction D relative to the carrier 7 until the collar 6.1 abuts the first protrusion 7.3. As the sleeve 6 translates distally, the sleeve legs 6.3 disengage the third legs 7.6 of the carrier 7 allowing them to radially outwardly deflect. Due to the movement of the sleeve 6 relative to the carrier 7 the distal tip of the needle 9 is covered again by the sleeve 6. On an attempt to again move the sleeve 6 in the proximal direction P relative to the body 2, the sleeve legs 6.3 axially abut the outwardly deflected third legs 7.6 preventing re-exposure of the needle 9. The length of the second rib 2.4 can be modified in order to adapt the position and hence the percentage of medicament delivered at which the third legs 7.6 are allowed to deflect radially outwards and lock out the sleeve 6.

**[0038]** In an exemplary embodiment, the cap 3 of the medicament delivery device 1 serves for keeping the needle 9 sterile prior to use, for removing the protective needle shield 14, for preventing unintended use of the medicament delivery device 1 prior to removal of the cap 3 and for providing rigid packaging.

[0039] In an exemplary embodiment, the medicament delivery device 1 allows for application by a user, e.g. a patient or caregiver, wherein the body 2 can be held in one hand. The needle 9 of the medicament delivery device 1 is hidden from view during all states of operation. [0040] In an exemplary embodiment, the insertion depth of the needle 9 is defined by the initial distance of the distal tip of the needle 9 from the distal end of the sleeve 6 and by the distance between the first protrusion 7.3 and the second protrusion 7.4 on the carrier 7 limiting relative axial movement of the sleeve 6.

**[0041]** In an exemplary embodiment, the forces required to insert the needle 9 into the injection site and to deliver the medicament can be adjusted by respectively selecting the sleeve spring 12 and the container spring 13, wherein the force for delivering the medicament depends on the container spring 13 and on the characteristics of the syringe 8, stopper 10, needle 9 and medicament.

[0042] The term "drug" or "medicament", as used herein, means a pharmaceutical formulation containing at

least one pharmaceutically active compound,

[0043] wherein in one embodiment the pharmaceutically active compound has a molecular weight up to 1500 Da and/or is a peptide, a proteine, a polysaccharide, a vaccine, a DNA, a RNA, an enzyme, an antibody or a fragment thereof, a hormone or an oligonucleotide, or a mixture of the above-mentioned pharmaceutically active compound,

[0044] wherein in a further embodiment the pharmaceutically active compound is useful for the treatment and/or prophylaxis of diabetes mellitus or complications associated with diabetes mellitus such as diabetic retinopathy, thromboembolism disorders such as deep vein or pulmonary thromboembolism, acute coronary syndrome (ACS), angina, myocardial infarction, cancer, macular degeneration, inflammation, hay fever, atherosclerosis and/or rheumatoid arthritis,

**[0045]** wherein in a further embodiment the pharmaceutically active compound comprises at least one peptide for the treatment and/or prophylaxis of diabetes mellitus or complications associated with diabetes mellitus such as diabetic retinopathy,

**[0046]** wherein in a further embodiment the pharmaceutically active compound comprises at least one human insulin or a human insulin analogue or derivative, glucagon-like peptide (GLP-1) or an analogue or derivative thereof, or exendin-3 or exendin-4 or an analogue or derivative of exendin-3 or exendin-4.

[0047] Insulin analogues are for example Gly(A21), Arg(B31), Arg(B32) human insulin; Lys(B3), Glu(B29) human insulin; Lys(B28), Pro(B29) human insulin; Asp(B28) human insulin; human insulin, wherein proline in position B28 is replaced by Asp, Lys, Leu, Val or Ala and wherein in position B29 Lys may be replaced by Pro; Ala(B26) human insulin; Des(B28-B30) human insulin; Des(B27) human insulin and Des(B30) human insulin. [0048] Insulin derivates are for example B29-N-myristoyl-des(B30) human insulin; B29-N-palmitoyl-des(B30) human insulin; B29-N-myristoyl human insulin;

palmitoyl human insulin; B28-N-myristoyl LysB28ProB29 human insulin; B28-N-palmitoyl-LysB28ProB29 human insulin; B30-N-myristoyl-ThrB29LysB30 human insulin; B30-N-palmitoyl-ThrB29LysB30 human insulin; B29-N-(N-palmitoyl-Yglutamyl)-des(B30) human insulin; B29-N-(N-lithocholyl-Y-glutamyl)-des(B30) human insulin; B29-N-(ω-carboxyheptadecanoyl)-des(B30) human insulin and B29-N-(ωcarboxyheptadecanoyl) human insulin.

[0049] Exendin-4 for example means Exendin-4(1-39), a peptide of the sequence H-His-Gly-Glu-Gly-Thr-Phe-Thr-Ser-Asp-Leu-Ser-Lys-Gln-Met-Glu-Glu-Glu-Ala-Val-Arg-Leu-Phe-Ile-Glu-Trp-Leu-Lys-Asn-Gly-Gly-Pro-Ser-Ser-Gly-Ala-Pro-Pro-Pro-Ser-NH2.

**[0050]** Exendin-4 derivatives are for example selected from the following list of compounds:

H-(Lys)4-des Pro36, des Pro37 Exendin-4(1-39)-NH2,

20

H-(Lys)5-des Pro36, des Pro37 Exendin-4(1-39)-NH2,

des Pro36 Exendin-4(1-39),

des Pro36 [Asp28] Exendin-4(1-39),

des Pro36 [IsoAsp28] Exendin-4(1-39),

des Pro36 [Met(O)14, Asp28] Exendin-4(1-39),

des Pro36 [Met(O)14, IsoAsp28] Exendin-4(1-39),

des Pro36 [Trp(02)25, Asp28] Exendin-4(1-39),

des Pro36 [Trp(02)25, IsoAsp28] Exendin-4(1-39),

des Pro36 [Met(O)14 Trp(02)25, Asp28] Exendin-4(1-39),

des Pro36 [Met(O)14 Trp(02)25, IsoAsp28] Exendin-4(1-39); or

des Pro36 [Asp28] Exendin-4(1-39),

des Pro36 [IsoAsp28] Exendin-4(1-39),

des Pro36 [Met(O)14, Asp28] Exendin-4(1-39),

des Pro36 [Met(O)14, IsoAsp28] Exendin-4(1-39),

des Pro36 [Trp(02)25, Asp28] Exendin-4(1-39),

des Pro36 [Trp(02)25, IsoAsp28] Exendin-4(1-39), des Pro36 [Met(O)14 Trp(02)25, Asp28] Exendin-4(1-39),

des Pro36 [Met(O)14 Trp(02)25, IsoAsp28] Exendin-4(1-39),

wherein the group -Lys6-NH2 may be bound to the C-terminus of the Exendin-4 derivative;

or an Exendin-4 derivative of the sequence des Pro36 Exendin-4(1-39)-Lys6-NH2 (AVE0010), H-(Lys)6-des Pro36 [Asp28] Exendin-4(1-39)-Lys6-NH2,

des Asp28 Pro36, Pro37, Pro38Exendin-4(1-39)-NH2,

H-(Lys)6-des Pro36, Pro38 [Asp28] Exendin-4(1-39)-NH2,

H-Asn-(Glu)5des Pro36, Pro37, Pro38 [Asp28] Exendin-4(1-39)-NH2,

des Pro36, Pro37, Pro38 [Asp28] Exendin-4(1-39)-(Lys)6-NH2,

H-(Lys)6-des Pro36, Pro37, Pro38 [Asp28] Exendin-4(1-39)-(Lys)6-NH2,

H-Asn-(Glu)5-des Pro36, Pro37, Pro38 [Asp28] Exendin-4(1-39)-(Lys)6-NH2,

H-(Lys)6-des Pro36 [Trp(02)25, Asp28] Exendin-4(1-39)-Lys6-NH2,

H-des Asp28 Pro36, Pro37, Pro38 [Trp(02)25] Exendin-4(1-39)-NH2,

H-(Lys)6-des Pro36, Pro37, Pro38 [Trp(02)25, Asp28] Exendin-4(1-39)-NH2,

H-Asn-(Glu)5-des Pro36, Pro37, Pro38 [Trp(02)25, Asp28] Exendin-4(1-39)-NH2,

des Pro36, Pro37, Pro38 [Trp(02)25, Asp28] Exendin-4(1-39)-(Lys)6-NH2,

H-(Lys)6-des Pro36, Pro37, Pro38 [Trp(02)25, Asp28] Exendin-4(1-39)-(Lys)6-NH2,

H-Asn-(Glu)5-des Pro36, Pro37, Pro38 [Trp(02)25, Asp28] Exendin-4(1-39)-(Lys)6-NH2,

H-(Lys)6-des Pro36 [Met(O)14, Asp28] Exendin-4(1-39)-Lys6-NH2,

des Met(O)14 Asp28 Pro36, Pro37, Pro38 Exendin-4(1-39)-NH2,

H-(Lys)6-desPro36, Pro37, Pro38 [Met(O)14, Asp28] Exendin-4(1-39)-NH2,

H-Asn-(Glu)5-des Pro36, Pro37, Pro38 [Met(O)14, Asp28] Exendin-4(1-39)-NH2,

des Pro36, Pro37, Pro38 [Met(O)14, Asp28] Exendin-4(1-39)-(Lys)6-NH2,

H-(Lys)6-des Pro36, Pro37, Pro38 [Met(O)14, Asp28] Exendin-4(1-39)-(Lys)6-NH2,

H-Asn-(Glu)5 des Pro36, Pro37, Pro38 [Met(O)14, Asp28] Exendin-4(1-39)-(Lys)6-NH2,

H-Lys6-des Pro36 [Met(O)14, Trp(02)25, Asp28] Exendin-4(1-39)-Lys6-NH2,

H-des Asp28 Pro36, Pro37, Pro38 [Met(O)14, Trp(02)25] Exendin-4(1-39)-NH2,

H-(Lys)6-des Pro36, Pro37, Pro38 [Met(O)14, Asp28] Exendin-4(1-39)-NH2,

H-Asn-(Glu)5-des Pro36, Pro37, Pro38 [Met(O)14, Trp(02)25, Asp28] Exendin-4(1-39)-NH2,

des Pro36, Pro37, Pro38 [Met(O)14, Trp(02)25, Asp28] Exendin-4(1-39)-(Lys)6-NH2,

H-(Lys)6-des Pro36, Pro37, Pro38 [Met(O)14, Trp(02)25, Asp28] Exendin-4(S1-39)-(Lys)6-NH2, H-Asn-(Glu)5-des Pro36, Pro37, Pro38 [Met(O)14, Trp(02)25, Asp28] Exendin-4(1-39)-(Lys)6-NH2;

or a pharmaceutically acceptable salt or solvate of any one of the afore-mentioned Exendin-4 derivative.

[0051] Hormones are for example hypophysis hormones or hypothalamus hormones or regulatory active peptides and their antagonists as listed in Rote Liste, ed. 2008, Chapter 50, such as Gonadotropine (Follitropin, Lutropin, Choriongonadotropin, Menotropin), Somatropine (Somatropin), Desmopressin, Terlipressin, Gonadorelin, Triptorelin, Leuprorelin, Buserelin, Nafarelin, Goserelin.

[0052] A polysaccharide is for example a glucosaminoglycane, a hyaluronic acid, a heparin, a low molecular weight heparin or an ultra low molecular weight heparin or a derivative thereof, or a sulphated, e.g. a poly-sulphated form of the above-mentioned polysaccharides, and/or a pharmaceutically acceptable salt

thereof. An example of a pharmaceutically acceptable salt thereof. An example of a pharmaceutically acceptable salt of a poly-sulphated low molecular weight heparin is enoxaparin sodium.

[0053] Antibodies are globular plasma proteins (~150 kDa) that are also known as immunoglobulins which share a basic structure. As they have sugar chains added to amino acid residues, they are glycoproteins. The basic functional unit of each antibody is an immunoglobulin (Ig) monomer (containing only one Ig unit); secreted antibodies can also be dimeric with two Ig units as with IgA, tetrameric with four Ig units like teleost fish IgM, or pentameric with five Ig units, like mammalian IgM.

[0054] The Ig monomer is a "Y"-shaped molecule that

consists of four polypeptide chains; two identical heavy chains and two identical light chains connected by disulfide bonds between cysteine residues. Each heavy chain is about 440 amino acids long; each light chain is about 220 amino acids long. Heavy and light chains each contain intrachain disulfide bonds which stabilize their folding. Each chain is composed of structural domains called lg domains. These domains contain about 70-110 amino acids and are classified into different categories (for example, variable or V, and constant or C) according to their size and function. They have a characteristic immunoglobulin fold in which two  $\beta$  sheets create a "sandwich" shape, held together by interactions between conserved cysteines and other charged amino acids.

**[0055]** There are five types of mammalian Ig heavy chain denoted by  $\alpha$ ,  $\delta$ ,  $\epsilon$ ,  $\gamma$ , and  $\mu$ . The type of heavy chain present defines the isotype of antibody; these chains are found in IgA, IgD, IgE, IgG, and IgM antibodies, respectively.

[0056] Distinct heavy chains differ in size and composition;  $\alpha$  and  $\gamma$  contain approximately 450 amino acids and  $\delta$  approximately 500 amino acids, while  $\mu$  and  $\epsilon$  have approximately 550 amino acids. Each heavy chain has two regions, the constant region (C<sub>H</sub>) and the variable region (V<sub>H</sub>). In one species, the constant region is essentially identical in all antibodies of the same isotype, but differs in antibodies of different isotypes. Heavy chains  $\gamma$ ,  $\alpha$  and  $\delta$  have a constant region composed of three tandem Ig domains, and a hinge region for added flexibility; heavy chains  $\mu$  and  $\epsilon$  have a constant region composed of four immunoglobulin domains. The variable region of the heavy chain differs in antibodies produced by different B cells, but is the same for all antibodies produced by a single B cell or B cell clone. The variable region of each heavy chain is approximately 110 amino acids long and is composed of a single Ig domain.

[0057] In mammals, there are two types of immunoglobulin light chain denoted by  $\lambda$  and  $\kappa.$  A light chain has two successive domains: one constant domain (CL) and one variable domain (VL). The approximate length of a light chain is 211 to 217 amino acids. Each antibody contains two light chains that are always identical; only one type of light chain,  $\kappa$  or  $\lambda,$  is present per antibody in mammals.

[0058] Although the general structure of all antibodies is very similar, the unique property of a given antibody is determined by the variable (V) regions, as detailed above. More specifically, variable loops, three each the light (VL) and three on the heavy (VH) chain, are responsible for binding to the antigen, i.e. for its antigen specificity. These loops are referred to as the Complementarity Determining Regions (CDRs). Because CDRs from both VH and VL domains contribute to the antigen-binding site, it is the combination of the heavy and the light chains, and not either alone, that determines the final antigen specificity.

[0059] An "antibody fragment" contains at least one antigen binding fragment as defined above, and exhibits

essentially the same function and specificity as the complete antibody of which the fragment is derived from. Limited proteolytic digestion with papain cleaves the Ig prototype into three fragments. Two identical amino terminal fragments, each containing one entire L chain and about half an H chain, are the antigen binding fragments (Fab). The third fragment, similar in size but containing the carboxyl terminal half of both heavy chains with their interchain disulfide bond, is the crystalizable fragment (Fc). The Fc contains carbohydrates, complement-binding, and FcR-binding sites. Limited pepsin digestion yields a single F(ab')2 fragment containing both Fab pieces and the hinge region, including the H-H interchain disulfide bond. F(ab')2 is divalent for antigen binding. The disulfide bond of F(ab')2 may be cleaved in order to obtain Fab'.

bond. F(ab')2 is divalent for antigen binding. The disulfide bond of F(ab')2 may be cleaved in order to obtain Fab'. Moreover, the variable regions of the heavy and light chains can be fused together to form a single chain variable fragment (scFv).

[0060] Pharmaceutically acceptable salts are for example acid addition salts and basic salts. Acid addition salts are e.g. HCl or HBr salts. Basic salts are e.g. salts having a cation selected from alkali or alkaline, e.g. Na+, Ca2+, or an ammonium or N+(R1)(R2)(R3)(R4), wherein R1 to R4 independently of each other mean: hydrogen, an optionally substituted C1-C6-alkyl group, an optionally substituted C2-C6-alkenyl group, an optionally substituted C6-C10-aryl group, or an optionally substituted C6-C10-heteroaryl group. Further examples of pharmaceutically acceptable salts are described in "Remington's Pharmaceutical Sciences" 17. ed. Alfonso R. Gennaro (Ed.), Mark Publishing Company, Easton, Pa., U.S.A., 1985 and in Encyclopedia of Pharmaceutical Technology.

**[0061]** Pharmaceutically acceptable solvates are for example hydrates.

**[0062]** Those of skill in the art will understand that modifications (additions and/or removals) of various components of the apparatuses, methods and/or systems and embodiments described herein may be made without departing from the full scope and spirit of the present invention, which encompass such modifications and any and all equivalents thereof.

#### 45 Claims

40

50

- 1. A medicament delivery device (1) comprising:
  - a body (2);
  - a container carrier (7) slidably disposed in the body (2); and
  - a sleeve (6) slidably coupled to the container carrier (7).
- 2. The medicament delivery device (1) according to claim 1, wherein the container carrier (7) includes at least one first leg (7.2) having a first protrusion (7.3) and a second protrusion (7.4) proximal of the first

20

25


40

protrusion (7.3).

- 3. The medicament delivery device (1) according to claim 2, wherein the sleeve (6) includes a collar (6.1) adapted to abut the first protrusion (7.3) and the second protrusion (7.4).
- 4. The medicament delivery device (1) according to any one of the preceding claims, wherein the container carrier (7) includes at least one second leg (7.5) biased radially outward.
- 5. The medicament delivery device (1) according to claim 4, wherein the body (2) includes at least one axial stop adapted to axially abut the at least one second leg (7.5).
- 6. The medicament delivery device (1) according to any one of the preceding claims, wherein the container carrier (7) includes at least one third leg (7.6) biased radially outward.
- 7. The medicament delivery device (1) according to claim 6, wherein the sleeve (6) includes at least one sleeve leg (6.3) adapted to radially abut the at least one third leg (7.6) when the sleeve (6) is in a retracted position relative to the body (2).
- 8. The medicament delivery device (1) according to claim 7, wherein the at least one third leg (7.6) is adapted to axially abut the at least one sleeve leg (6.3) to lock the sleeve (6) in an extended position relative to the body (2).
- 9. The medicament delivery device (1) according to claims 2, 4, and 6, wherein the at least one first leg (7.2), the at least one second leg (7.5) and the at least one third leg (7.6) are coupled to a periphery of a proximal portion (7.1) of the container carrier (7), and the at least one first leg (7.2), the at least one second leg (7.5) and the at least one third leg (7.6) extend in a distal direction from the proximal portion (7.1).
- **10.** The medicament delivery device (1) according to any one of the preceding claims, further comprising a plunger rod (11) disposed within the body (2).
- **11.** The medicament delivery device (1) according to claim 10, wherien the plunger rod (11) is fixed to the body (2).
- **12.** The medicament delivery device (1) according to any one of the preceding claims, further comprising a sleeve spring (12) biasing the sleeve (6) relative to the container carrier (7).
- 13. The medicament delivery device (1) according to

claims 3 and 12, wherien the sleeve spring (12) biases the sleeve (6) toward the first protrusion (7.3).

- **14.** The medicament delivery device (1) according to any one of the preceding claims, further comprising a container spring (12) biasing the carrier (7) relative to the body (2).
- **15.** The medicament delivery device (1) according to any one of the preceding claims, wherein the sleeve (6) includes one or more sleeve windows (6.2).
- **16.** The medicament delivery device (1) according to any one of the preceding claims, further comprising a cap (3) removably coupled to the body (2).
- 17. The medicament delivery device (1) according to claim 16, wherein the cap (3) includes a viewing window (4).
- **18.** The medicament delivery device (1) according to claim 16, wherein the cap (3) includes one or more indicia (5) indicating an intended orientation of the device (1).
- 19. The medicament delivery device (1) according to any one of the preceding claims, further comprising a container including a medicament.
- **20.** The medicament delivery device (1) according to claims 9 and 16, wherein the proximal portion (7.1) of the container carrier (7) is adapted to receive the container.

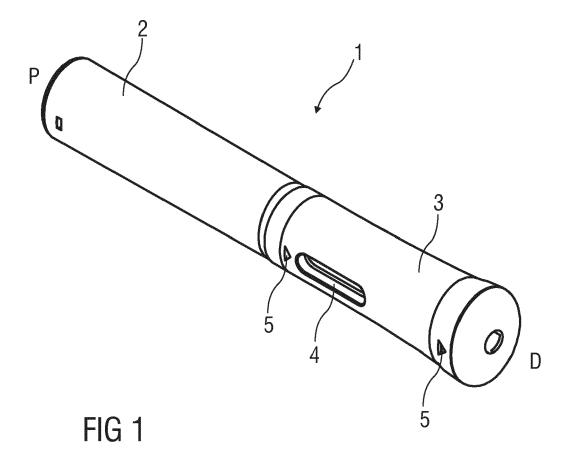

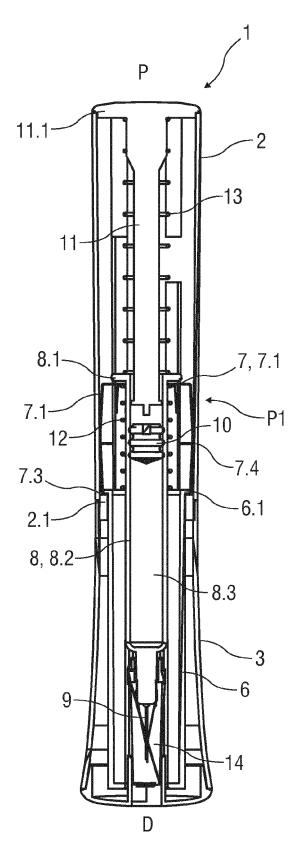


FIG 2

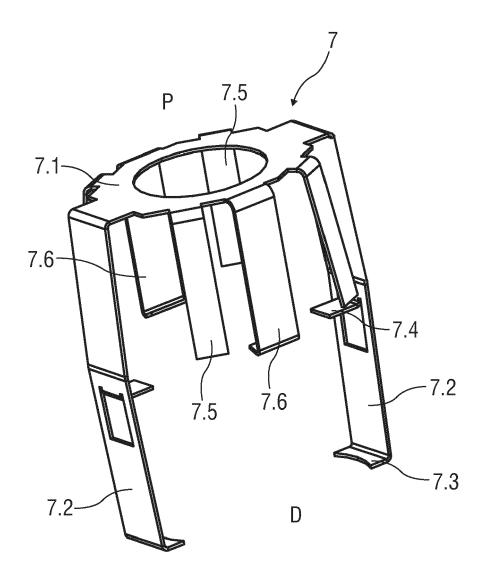


FIG 3

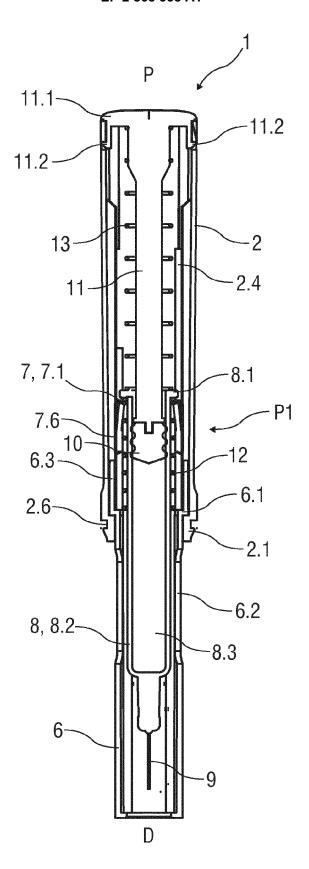


FIG 4

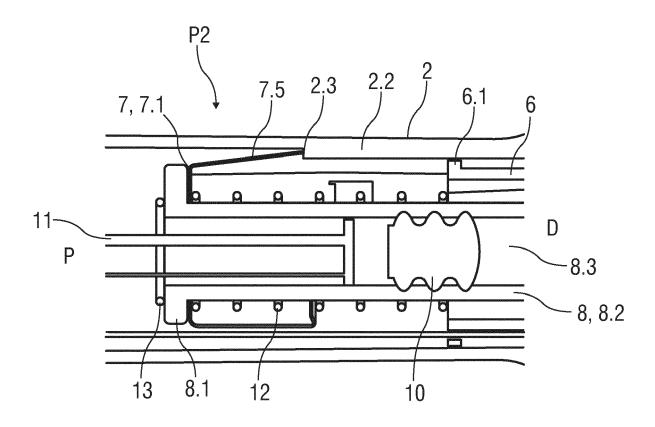


FIG 5

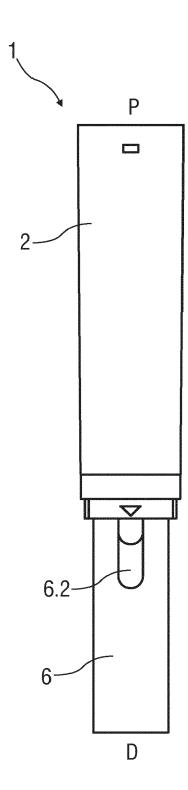
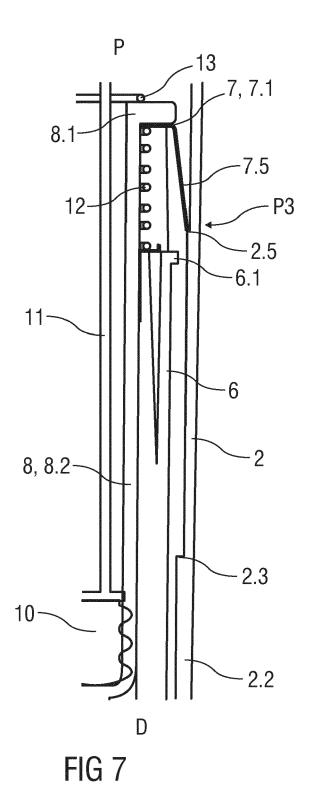


FIG 6



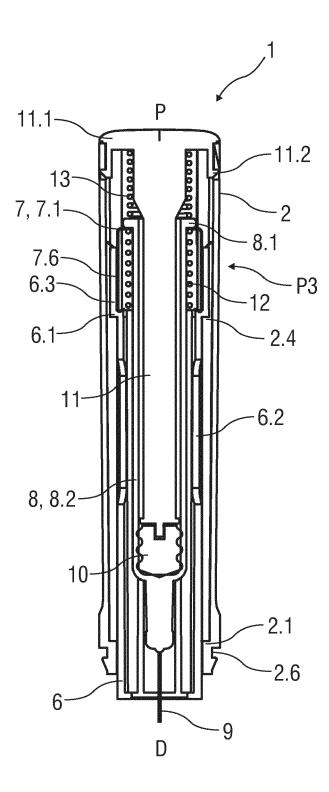


FIG 8

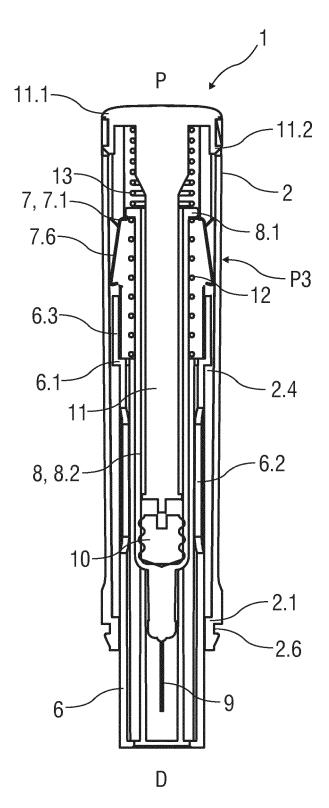


FIG 9



# **EUROPEAN SEARCH REPORT**

Application Number EP 13 19 1199

		RED TO BE RELEVANT	Relevant	OI ADDICIOATION OF THE	
Category	Citation of document with indication, where appropriate, of relevant passages			CLASSIFICATION OF THE APPLICATION (IPC)	
Х	EP 2 399 628 A1 (SANO DEUTSCHLAND [DE]) 28 December 2011 (201		1-6,10, 19	INV. A61M5/32	
Y A	* paragraph [0041] *  * paragraph [0045] *  * paragraph [0055]; 1	·	16-18 7-9,13, 20	ADD. A61M5/24 A61M5/315 A61M5/46	
Х	WO 2005/070481 A1 (ME STAMP KEVIN [GB]) 4 August 2005 (2005-6	EDICAL HOUSE PLC [GB];	1,2,4-6, 10,19		
Υ	* page 14, line 8 - 1 * page 12, line 6 - 1 * figures 1,3,5 *	line 17 *	16-18		
Х	WO 2012/093070 A1 (SADEUTSCHLAND [DE]; ROEEKMAN MATTHEW [G)	BERTS GARETH [GB];	1,10,11, 14,16,19		
Υ	12 July 2012 (2012-07 * page 15, line 20 - 2,4A,4B *	line 24; figures	16-18		
х	GB 2 463 071 A (OWEN		1-5,10,	TECHNICAL FIELDS SEARCHED (IPC)	
Υ	3 March 2010 (2010-03 * page 7, line 12 - p figures 6,7,19 *		19 16-18	A61M	
Х	EP 2 468 338 A1 (SANO DEUTSCHLAND [DE]) 27 June 2012 (2012-06		1,2,10, 16,19		
Υ	* paragraphs [0041] - 5B, 9A *	- [0043]; figures 5A,	16-18		
Υ	WO 2012/103141 A1 (AE JULIAN JOSEPH F [US]; AARON B) 2 August 201 * page 18, line 6 - 1	LI CHUAN [US]; ÉIGER (2012-08-02)	16-18		
		-/			
	The present search report has bee	en drawn up for all claims			
	Place of search	Date of completion of the search		Examiner	
Munich 14 Fe		14 February 2014	Dia	amantouros, S	
CATEGORY OF CITED DOCUMENTS  X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document			ument, but public the application rother reasons	shed on, or	
		& : member of the sai document	me patent family	, corresponding	



# **EUROPEAN SEARCH REPORT**

Application Number

EP 13 19 1199

	DOCUMENTS CONSIDERED TO BE RELEVANT				
	Category	Citation of document with inc of relevant passa		Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
10	Х	WO 2011/047298 A2 ((	CENTOCOR ORTHO BIOTECH IN P [US]: KRULEVITCH	1,10-12, 15,16,19	
15	Υ	PETER) 21 April 201 * page 12, line 22 * page 14, line 24 * figures 1-3 *	- line 23 * - page 15, line 2 *	16-18	
20					
25					
30					TECHNICAL FIELDS SEARCHED (IPC)
35					
40					
45					
1	The present search report has been drawn u		•	•	
50 (1004		Place of search Munich	Date of completion of the search  14 February 2014	Examiner  Diamantouros, S	
55 EPO FORM 1503 03.82 (P04C01)	CATEGORY OF CITED DOCUMENTS  X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document		T : theory or principle E : earlier patent doc after the filing date  P : document cited in L : document cited fo	underlying the ir ument, but publis e the application r other reasons	nvention hed on, or
<b>55</b>			& : member of the sa document	corresponding	

# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 13 19 1199

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-02-2014

1	0	

70	Patent document cited in search report	Publication date	Patent family member(s)	Publication date
15	EP 2399628 A1	28-12-2011	CA 2802520 A1 EP 2399628 A1 EP 2585140 A1 JP 2013529520 A TW 201212965 A US 2013310759 A1 WO 2012000872 A1	05-01-2012 28-12-2011 01-05-2013 22-07-2013 01-04-2012 21-11-2013 05-01-2012
20	WO 2005070481 A1	04-08-2005	AT 376437 T AU 2005205966 A1 DE 602005003009 T2 DK 1715903 T3 EP 1715903 A1 ES 2296129 T3	15-11-2007 04-08-2005 14-08-2008 25-02-2008 02-11-2006 16-04-2008
25			JP 4578484 B2 JP 2007518507 A KR 20060129024 A WO 2005070481 A1	10-11-2010 12-07-2007 14-12-2006 04-08-2005
30 35	WO 2012093070 A1	12-07-2012	AU 2011354197 A1 CA 2822889 A1 CN 103415312 A EP 2661292 A1 US 2013331795 A1 WO 2012093070 A1	18-07-2013 12-07-2012 27-11-2013 13-11-2013 12-12-2013 12-07-2012
40	GB 2463071 A	03-03-2010	CN 102438677 A EP 2331175 A1 GB 2463071 A JP 2012510825 A US 2011172602 A1 WO 2010026414 A1	02-05-2012 15-06-2011 03-03-2010 17-05-2012 14-07-2011 11-03-2010
45	EP 2468338 A1	27-06-2012	CA 2821846 A1 EP 2468338 A1 EP 2654834 A1 US 2013274671 A1 WO 2012085029 A1	28-06-2012 27-06-2012 30-10-2013 17-10-2013 28-06-2012
50 HOHM P0459	WO 2012103141 A1	02-08-2012	AU 2012209223 A1 CA 2825316 A1 CN 103533975 A CR 20130399 A DO P2013000167 A EP 2667918 A1 SG 192119 A1	02-05-2013 02-08-2012 22-01-2014 09-01-2014 15-01-2014 04-12-2013 30-08-2013
55				

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

### ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 13 19 1199

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-02-2014

1	0

15

20

Patent document cited in search report	Publication date		Patent family member(s)		Publication date
		US WO	2012289905 2012103141		15-11-2012 02-08-2012
WO 2011047298 A2	21-04-2011	AU CA CN EA EP JP KR US WO	2010306625 2777424 102665805 201270565 2488237 2013508032 20120095386 2011092915 2011047298	A1 A1 A2 A A A	03-05-2012 21-04-2011 12-09-2012 30-11-2012 22-08-2012 07-03-2013 28-08-2012 21-04-2011 21-04-2011

25

30

35

40

45

50

55

FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

### EP 2 868 338 A1

#### REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

# Non-patent literature cited in the description

Rote Liste. 2008 [0051]

Remington's Pharmaceutical Sciences. Encyclopedia of Pharmaceutical Technology. Mark Publishing Company, 1985 [0060]