

## (11) EP 2 945 090 A1

(12)

# **EUROPEAN PATENT APPLICATION** published in accordance with Art. 153(4) EPC

(43) Date of publication: 18.11.2015 Bulletin 2015/47

(21) Application number: 14738232.9

(22) Date of filing: 09.01.2014

(51) Int Cl.: G06F 21/32<sup>(2013.01)</sup> G10L 17/00<sup>(2013.01)</sup>

G10L 15/00 (2013.01)

(86) International application number: **PCT/JP2014/050180** 

(87) International publication number: WO 2014/109344 (17.07.2014 Gazette 2014/29)

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

Designated Extension States: **BA ME** 

(30) Priority: 10.01.2013 JP 2013002387

(71) Applicant: NEC CORPORATION Tokyo 108-8001 (JP)

(72) Inventor: SHIMA, Yoshikazu Kawasaki-shi Kanagawa 211-8666 (JP)


(74) Representative: Vossius & Partner Patentanwälte Rechtsanwälte mbB Siebertstrasse 3 81675 München (DE)

## (54) TERMINAL, UNLOCKING METHOD, AND PROGRAM

(57) A terminal comprises: speech receiving means that receives speech in a locked state; voiceprint authentication means that performs voiceprint authentication based on the speech received in the locked state and determining whether or not a user is legitimate; speech recognition means that performs speech recognition of

the speech received in the locked state; and execution means that executes an application using a result of the speech recognition. It is possible to easily unlock the terminal having the voiceprint authentication and speech recognition functions.

FIG. 1

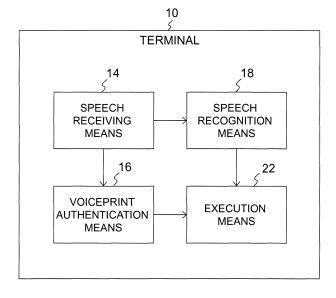

EP 2 945 090 A1

#### Description

#### **TECHNICAL FIELD**

(Cross-reference to Related Applications)

[0001] The present application claims priority from Japanese Patent Application No. 2013-002387 (filed on January 10, 2013), the content of which is hereby incorporated in its entirety by reference into this specification. The invention relates to a terminal, an unlocking method, and a program, and in particular to a terminal provided with voiceprint authentication and speech recognition functions, and an unlocking method and program for the terminal

1

#### **BACKGROUND**

**[0002]** In recent years, mobile terminals such as smart phones, tablet terminals and the like are rapidly becoming widely used. As a method of inputting to these mobile terminals, a method of operating a touch panel by a finger is generally used. On the other hand, in order to enable input to a terminal when both hands are full, model types that have a function for terminal operation by speech input are increasing.

[0003] In a mobile terminal provided with a touch panel, in order to avoid misuse, when the terminal is started up for the first time or is activated from a sleep state, an authentication screen is displayed and a confirmation is made as to whether or not the user is legitimate. Known methods of performing authentication and releasing usage restrictions include a method based on password input, or a method based on the locus of a finger on a touch panel, or the like.

**[0004]** In a case where a mobile terminal is inside a bag or a pocket, it is necessary to avoid a malfunction being caused by an unintended reaction of the touch panel. Therefore, a method is used wherein a particular operation that does not occur frequently on the touch panel is recommended to a user, and usage restrictions of the terminal are unlocked only in a case where the particular operation is accepted. The particular operation, for example, may be an operation of sliding a finger only a fixed distance on the screen, or an operation such as a double tap of a particular region.

**[0005]** Releasing usage restrictions on a terminal (that is, access restrictions to information or resources held by the terminal) based on user input to an authentication screen, a particular operation by the user, or the like, is referred to below as "unlocking."

**[0006]** As related technology, Patent Literature 1 discloses an individual authentication device that uses biometric information such as fingerprint, voiceprint, face, or iris.

**[0007]** Patent Literature 2 discloses a method of unlocking a mobile telephone based on a result of comparing a stored user voiceprint and speech uttered by a user.

**[0008]** Patent Literature 3 discloses a speech recognition system in which an individual is authenticated based on voiceprint information extracted from inputted speech, and when authenticated speech is determined, commands from the speech in question are recognized, and a device is remotely operated by the recognized commands.

**[0009]** Patent Literature 4 discloses a mobile terminal device in which voiceprint authentication is performed based on speech generated by a user, and depending on the authentication result, prescribed processing is executed or halted in accordance with the speech.

CITATION LIST

### PATENT LITERATURE

#### [0010]

15

20

25

30

35

45

PTL 1:

Japanese Patent Kokai Publication No.JP2002-236666A

PTL 2:

Japanese Patent Kokai Publication No.JP2004-180254A

PTL 3:

Japanese Patent Kokai Publication No.JP2007-140048A

PTL 4:

Japanese Patent Kokai Publication No.JP2011-087110A

40 SUMMARY

## **TECHNICAL PROBLEM**

**[0011]** The entire disclosed content of the abovementioned patent literature is incorporated herein by reference thereto. The following analysis is given according to the present inventor.

**[0012]** Normally, to display an authentication screen in order to perform unlocking, it is necessary to perform startup or activation from a sleep state. In performing activation from a sleep state based on an operation on a software key or a touch panel, sensing of the touch panel has to be continuously performed, which is not preferable from the viewpoint of power consumption. Therefore, in activation from a sleep state, generally an operation on a hardware key is necessary, and the unlocking is performed by user input to an authentication screen displayed by the relevant operation. This series of oper-

ations is troublesome for a user who wishes to use functions of the terminal immediately.

**[0013]** Patent Literature 1 discloses an individual authentication device that uses a voiceprint as biometric information. According to this device, it is not necessary for the user to perform an operation by a finger. Furthermore, an unlocking method is known whereby a registered fixed phrase read out by the user himself is the password. However, there is a risk that the security level will drop due to another person hearing the fixed phrase being read.

**[0014]** In order to overcome the technical problem described in Patent Literature 1, it is possible to use, for example, an unlocking method using voiceprint authentication described in Patent Literature 2. However, since it is easier to perform an input operation to a screen by a finger than to expressly make an utterance for the purpose of unlocking a smart phone or tablet, there is a problem in that user convenience is not improved.

**[0015]** On the other hand, smart phones and tablet terminals that have a speech recognition function, such as conversation-type terminal operations and speech input search, are becoming popular. However, in using a speech recognition function in these terminals, as described above, it is necessary to perform startup by an operation on a hardware key, to perform unlocking based on input to an authentication screen, and in addition, to perform selection of an icon for speech input from a menu, with the result that operability is poor.

[0016] According to technology described in Patent Literature 3 and 4, a terminal in a locked state is not capable of speech reception; a user cannot immediately use a function of the terminal in a locked state; and a cumbersome operation is required in order to unlock the terminal. [0017] Therefore, there is a demand to be able to easily unlock a terminal having voiceprint authentication and speech recognition functions. It is an object of the present

invention to provide a terminal, an unlocking method and a program that can respond to this demand.

#### SOLUTION TO PROBLEM

**[0018]** According a first aspect of the present invention, there is provided a terminal, comprising: speech receiving means that receives speech in a locked state; voice-print authentication means that performs voiceprint authentication based on the speech received in the locked state and determining whether or not a user is legitimate; speech recognition means that performs speech recognition of the speech received in the locked state; and execution means that executes an application using a result of the speech recognition.

**[0019]** According a second aspect of the present invention, there is provided an unlocking method, comprising: by a terminal, receiving speech in a locked state; performing voiceprint authentication based on the speech received in the locked state and determining whether or not a user is legitimate; performing speech

recognition of the speech received in the locked state; and executing an application using a result of the speech recognition.

**[0020]** According a third aspect of the present invention, there is provided a program, causing a computer provided in a terminal to execute: receiving speech in a locked state; performing voiceprint authentication based on the speech received in the locked state and determining whether or not a user is legitimate; performing speech recognition of the speech received in the locked state; and executing an application using a result of the speech recognition. It is to be noted that this program may be provided as a program product recorded on a non-transitory computer-readable storage medium.

#### ADVANTAGEOUS EFFECTS OF INVENTION

**[0021]** According to the terminal, the unlocking method, and the program, in accordance with the present invention, it is possible to easily unlock a terminal provided with voiceprint authentication and speech recognition functions.

### BRIEF DESCRIPTION OF DRAWINGS

### [0022]

25

30

35

40

45

[Fig. 1] FIG. 1 is a block diagram showing an example of a configuration of a terminal according to a first exemplary embodiment.

[Fig. 2] FIG. 2 is a block diagram showing an example of operations of the terminal according to the first exemplary embodiment.

[Fig. 3] FIG. 3 is a block diagram showing an example of a configuration of a terminal according to a second exemplary embodiment.

[Fig. 4] FIG. 4 is a block diagram showing an example of operations of the terminal according to the second exemplary embodiment.

[Fig. 5] FIG. 5 is a block diagram showing an example of a configuration of a terminal according to third and fourth exemplary embodiments.

[Fig. 6] FIG. 6 is a diagram exemplifying operations of the terminal in an example.

### **DESCRIPTION OF EMBODIMENTS**

**[0023]** First, a description is given concerning an outline of an exemplary embodiment. It is to be noted that reference symbols in the drawings attached to this outline are examples for the purpose of aiding understanding, and are not intended to limit the present invention to modes illustrated in the drawings.

**[0024]** Referring to FIG. 1, a terminal (10) is provided with: speech receiving means (14) that receives speech with the terminal (10) in a locked state; voiceprint authentication means (16) that performs voiceprint authentication based on the speech received in the locked state

20

25

40

45

and determining whether or not the user is legitimate; speech recognition means (18) that performs speech recognition (for example, converting the speech into text data) of the speech received in the locked state; and execution means (22) that executes an application using a result of the speech recognition (for example, text data). [0025] With the terminal (10), by uttering the content of text (for example, a command, a keyword, or the like) for executing an application, a terminal user can unlock the terminal and execute the application. Therefore, the user of the terminal (10) need not make an utterance for the purpose only of unlocking the terminal. Consequently, with the terminal (10), it is possible to easily unlock a terminal having voiceprint authentication and speech recognition functions.

**[0026]** Referring to FIG. 3, a terminal (20) may be further provided with power activation means (12) that activates a power supply to the terminal (20) if a prescribed operation is detected. At this time, the speech receiving means (14) begins receiving the speech in a locked state if the power supply to the terminal (20) is activated in response to the prescribed operation.

**[0027]** According to the terminal (20) in question, with the terminal in a locked state, there is no necessity to continuously run a speech receiving operation by the speech receiving means (14), and it is possible to start the speech receiving operation by the speech receiving means (14) with an operation on the power activation means (12) as a trigger. Therefore, according to the terminal (20), it is possible to reduce power consumption in the locked state.

[0028] Referring to FIG. 5, a terminal (30) may be provided with sensor means (34) that measures a prescribed physical amount. At this time, the speech receiving means (14) begins receiving speech in the locked state if the physical amount (for example, vibration, heat) measured by the sensor means (34) is a prescribed value.

**[0029]** According to the terminal (30) in question, with the terminal in a locked state, there is no necessity to continuously run a speech receiving operation by the speech receiving means (14), and it is possible to start the speech receiving operation by the speech receiving means (14) with measurement of a prescribed physical amount by the sensor means (34) as a trigger. According to the terminal (30), by making the sensor means (34) operate with lower power consumption than the speech receiving means (14), it is possible to reduce power consumption in the locked state.

**[0030]** If the voiceprint authentication determines that the user is legitimate, the execution means (22) may execute an application using the result of the speech recognition, while allowing access to protected information stored in the terminal (10). On the other hand, if the voiceprint authentication does not determine that the user is legitimate, the execution means (22) may execute an application using the result of the speech recognition, while forbidding access to protected information stored in the

terminal (10).

**[0031]** According to the terminal (10) in question, even in a case where it is not recognized by voiceprint authentication that the user is legitimate, it is possible to execute an application based on speech uttered by the user, while appropriately protecting information stored in the terminal (10). Therefore, according to the terminal (10), in a case of failure in recognizing by voiceprint authentication that the user is legitimate, it is possible to avoid a wasted utterance by the user.

[0032] A detailed description is given below concerning the terminal according to exemplary embodiments, making reference to the drawings. It is to be noted that the terminal is not limited to a mobile telephone, smart phone etc., but may also be another electronic device such as a game console, a tablet terminal, a notebook PC (Personal Computer), a personal data assistant (PDA), a digital camera, a digital video camera, or the like. Applications operating using result(s) (for example, text data) of the speech recognition are not limited to applications such as speech recognition search (for example, web search), voice calls and the like, and may be other applications (for example, car navigation software, music reproduction software and the like) based on a speech recognition function. In the following exemplary embodiments a description is given of a case where a result of speech recognition is text data, but the result of the speech recognition is not limited to text data.

(First Exemplary Embodiment)

[0033] A description is given concerning a terminal according to a first exemplary embodiment, making reference to the drawings. FIG. 1 is a block diagram showing an example of a configuration of the terminal according to the present exemplary embodiment. Referring to FIG. 1, the terminal 10 is provided with speech receiving means 14, voiceprint authentication means 16, speech recognition means 18, and execution means 22.

[0034] The speech receiving means 14 receives speech with the terminal 10 in a locked state. The voice-print authentication means 16 performs voiceprint authentication based on the speech received in the locked state and determines whether or not the user is legitimate. The speech recognition means 18 converts the speech received in the locked state to text data by speech recognition. The execution means 22 executes an application using the text data.

[0035] FIG. 2 is a block diagram showing an example of operations of the terminal 10 according to the present exemplary embodiment. Referring to FIG. 2, a description is given concerning operations of the terminal 10.
[0036] First, the speech receiving means 14 receives speech with the terminal 10 in a locked state (step A1).
[0037] Next, the voiceprint authentication means 16 performs voiceprint authentication based on the speech received in the locked state and determines whether or not the user is legitimate (step A2). The speech recog-

nition means 18 converts the speech received in the locked state to text data by speech recognition (step A3). It is to be noted that the order of the voiceprint authentication and the speech recognition is not limited to the order shown in FIG. 2. Furthermore, the voiceprint authentication and the speech recognition may be executed at the same time.

[0038] Next, the execution means 22 executes an application using the text data (step A4).

**[0039]** According to the terminal 10, by uttering text so as to execute an application, a user of the terminal 10 can unlock the terminal 10 and execute the application. Therefore, the user of the terminal need not make an utterance for the purpose only of unlocking the terminal. Consequently, according to the terminal 10, it is possible to easily unlock a terminal having voiceprint authentication and speech recognition functions.

#### (Second Exemplary Embodiment)

**[0040]** A description is given concerning a terminal according to a second exemplary embodiment, making reference to the drawings. FIG. 3 is a block diagram showing an example of a configuration of the terminal according to the present exemplary embodiment. Referring to FIG. 3, the terminal 20 is provided with power activation means 12, speech receiving means 14, voiceprint authentication means 16, speech recognition means 18, execution means 22, touch panel means 24, display means 26, voiceprint storage means 28, and application storage means 32.

**[0041]** The voiceprint storage means 28 is provided in advance with voiceprint information of a user of the terminal 20, in order to perform voiceprint authentication.

**[0042]** The application storage means 32 holds an application that operates using text data (for example, a command, a keyword, or the like) extracted from speech by a speech recognition function, or an application activated based on the text data in question. As an application (also referred to simply as "app"), a voice search application that performs web search and the like based on a search keyword given by a user, a voice call application that makes a call based on a telephone number of another party given by the user, or the like, may be envisaged. However, applications are not limited to thereto.

**[0043]** The power activation means 12 activates a power supply to the terminal 20 when a prescribed operation, such as a hardware key being pressed by the user, is detected.

**[0044]** The speech receiving means 14 receives speech with the terminal 20 in a locked state. The speech receiving means 14 begins receiving the speech in a locked state, in a case where the power supply to the terminal 20 is activated in response to the abovementioned prescribed operation.

**[0045]** The voiceprint authentication means compares the speech received in the locked state and the voiceprint

information stored in the voiceprint storage means 28 to perform voiceprint authentication, and determines whether or not the user is legitimate.

**[0046]** The speech recognition means 18 converts the speech received in the locked state to text data by speech recognition.

**[0047]** The execution means 22 uses the text data obtained by the speech recognition means 18 to execute (or start up) an application stored in the application storage means 32.

[0048] In a case of determining by voiceprint authentication that the user is legitimate, the execution means 22 executes an application using the text data obtained by the speech recognition, while allowing access to protected information stored in the terminal 20. For example, in a case where the application is a voice search application, when it is recognized that the user of the terminal 20 is legitimate, the execution means 22 may perform a search using cookie information stored in the terminal 20. On the other hand, in a case where it is not determined by voiceprint authentication that the user is legitimate, the execution means 22 executes an application using the text data, while forbidding access to protected information stored in the terminal 20.

**[0049]** It is to be noted that in a case where an application cannot be executed without using protected information stored in the terminal 20, when it is not determined by voiceprint authentication that the user is legitimate, the execution means 22 need not execute or start up an application.

**[0050]** In a case of determining by voiceprint authentication that the user is legitimate, the execution means 22 extracts applications related to word(s) included in the text data and displays the extracted application list on the display means 26 of the terminal 20.

**[0051]** The touch panel means 24 receives input based on a touch operation by the user. It is to be noted that the touch panel means 24 and the display means 26 may have a configuration where they are mutually superimposed (for example, stuck together).

**[0052]** FIG. 4 is a block diagram showing an example of operations of the terminal 20 (FIG. 3). Referring to FIG. 4, a description is given concerning operations of the terminal 20.

[0053] In order to enable operation of the terminal 20 that is in a sleep state, for example, when the user gives a short push to a power button or the like, the power activation means 12 activates the power supply to the terminal 20 (step B1). Then the speech receiving means 14 starts receiving speech in the locked state (step B2). [0054] The voiceprint authentication means 16 compares the speech received by the speech receiving means 14 with the terminal 20 in the locked state, and

means 14 with the terminal 20 in the locked state, and the voiceprint information stored in the voiceprint storage means 28, to determine whether or not the user is legitimate (step B3).

[0055] The speech recognition means 18 converts the speech received by the speech receiving means 14 with

40

20

25

the terminal 20 in the locked state, to text data by speech recognition (step B4).

[0056] The execution means 22 executes an application stored in the application storage means 32 using the text data obtained by the speech recognition means 18. In a case of determining, by the voiceprint authentication means 16, that the user is legitimate (Yes in step B5), the execution means 22 executes an application using the text data, while allowing access (that is, normal mode) to protected information held by the terminal 20. For example, in a case where the application is an Internet search application based on speech recognition, the execution means 22 performs an Internet search using the text data and outputs result(s) of the Internet search to the display means 26.

**[0057]** Next, the execution means 22 extracts an application associated with the text data obtained by the speech recognition means 18 from the application storage means 32, to be displayed as a list on the display means 26 of the terminal 20 (step B7).

[0058] For example, when the text data includes a keyword (application name, telephone, camera, mail, player, etc.) that represents an application, a keyword (geographical name, telephone number, mail address, musical composition name, etc.) that represents data used by an application, or a keyword (start of a telephone call, photographing, mail transmission, reproduction, etc.) that represents an operation of an application, the execution means 22 extracts applications associated with these keywords as a list of candidates to be started up, and displays the list on the display means 26.

**[0059]** From the above, execution result(s) (step B6) of applications associated with content vocally inputted by the user and the list (step B7) of the applications in question are displayed on the display means 26 of the terminal 20. When the user selects a desired application by a touch operation from the list of applications displayed on the display means 26, the touch panel means 24 receives this (step B8).

**[0060]** Next, the execution means 22 starts up the application selected by the user (step B9).

[0061] On the other hand, in a case where the voiceprint authentication means 16 does not determine that the user is legitimate (No in step B5), the execution means 22 executes an application using the text data, while forbidding access (that is, restricted mode) to protected information held by the terminal 20 (step B10). It is to be noted that in a case where an application cannot be executed without using protected information stored in the terminal 20, when it is not determined by voiceprint authentication that the user is legitimate, the execution means 22 need not execute (or start up) an application. [0062] When performing the voiceprint authentication (step B3), a fixed amount of voice information is necessary. Therefore, where information for voiceprint authentication is lacking in step B3, means may be provided in the terminal 20 that recommends to the user the input of additional voice information. According to the terminal in

question, it is possible to improve the accuracy of the voiceprint authentication. When there is no additional speech input, the terminal 20 may be operated in a mode (restricted mode) the same as the case where the voiceprint authentication does not match.

**[0063]** With regard to the speech uttered while the user is pushing a prescribed button (for example, a software key on the screen) voiceprint authentication only may be used, without using speech recognition.

[0064] According to the terminal 20 of the present exemplary embodiment, unlocking is performed by the user only speaking to the authentication screen (lock screen), without unlocking the terminal by a finger, and it is possible to obtain result(s) of an Internet voice search and of voice commands or the like. According to the terminal 20, since it is possible to perform authentication regarding whether the user is legitimate by voiceprint authentication, it is possible to prevent fraudulent use of the terminal.

**[0065]** In terminals in related technology, normally if user authentication is not completed, it is completely impossible to use the functions of the terminal. According to such terminals, in a case where authentication based on voiceprint fails, keywords for performing speech input search or keywords for speech recognition conversation, inputted by a user by speech, are discarded.

[0066] However, according to the terminal 20 of the present exemplary embodiment, even in a case where it could not be determined that the user is legitimate, by voiceprint authentication (No in step B5), text data extracted from inputted speech is used in applications (for example, Internet search). Therefore, it is possible to prevent voice information inputted by a user being discarded and wasted when voiceprint authentication fails, and it is possible to dispense with the need for the user to repeat a speech utterance of the same content.

## (Third Exemplary Embodiment)

[0067] A description is given concerning a terminal according to a third exemplary embodiment, making reference to the drawings. FIG. 5 is a block diagram showing an example of a configuration of the terminal according to the present exemplary embodiment. Referring to FIG. 5, the terminal 30 is provided with sensor means 34, instead of power activation means 12 as in the terminal 20 (FIG. 3) according to the second exemplary embodiment. [0068] The sensor means 34 is a sensor that measures a prescribed physical amount (for example, acceleration, temperature, static electricity, or the like). In the present exemplary embodiment, in a case where the physical amount measured by the sensor means 34 is a prescribed value, speech receiving means 14 begins receiving speech in a locked state.

**[0069]** In the terminal 20 (FIG. 3) according to the second exemplary embodiment, speech reception by the speech receiving means 14 is started with activation of power supply by an operation on a power button or the

45

50

25

40

45

50

like, as a trigger. On the other hand, in the present exemplary embodiment, speech reception by the speech receiving means 14 is started with measurement by the sensor means 34 as a trigger. An accelerometer or a gyro sensor, for example, may be used as the sensor means 34, to detect shaking of the terminal 20. A sensor that detects heat or static electricity on a surface of the terminal 20 may also be used. By providing these sensors, it is possible to recognize that a user has touched the sensor 20, and to start speech reception by the speech receiving means 14.

**[0070]** According to the present exemplary embodiment, by only a user lifting up the terminal 20 and speaking to the terminal 20 as it is, for example, the terminal is unlocked, and it is possible to obtain result(s) of executing an application based on a speech recognition function. Since speech reception is not started until the prescribed physical amount is measured by the sensor 34, it is possible to reduce power when in standby.

## (Fourth Exemplary Embodiment)

**[0071]** A description is given concerning a terminal according to a fourth exemplary embodiment, making reference to the drawings. FIG. 5 is a block diagram showing an example of a configuration of the terminal 30 according to the present exemplary embodiment.

[0072] In the present exemplary embodiment, as the state of the terminal 30, sensor means 34 detects orientation (for example, vertical, horizontal, inclined), or a connection state of the terminal 30 with respect to peripheral equipment, or the like. As an example of the state of the terminal 30, the sensor means 34 detects a state where the terminal is held in a vertical orientation in the hand of the user, a state where the terminal is held in a horizontal orientation in the hand of the user, a state where the terminal is arranged on a charging stand (cradle), a state where the terminal is arranged in a car cradle (that is, a cradle attached to the car dashboard or similar), or the like.

[0073] The terminal 30 of the present exemplary embodiment operates, for example, as follows. In a case where the terminal 30 is vertically positioned, operations may be the same as in the third exemplary embodiment. [0074] On the other hand, in a case where the sensor means 34 detects that the terminal 30 is placed in a car cradle, speech receiving means 14 continuously performs a speech receiving operation. In a case where it is determined by speech recognition means 18 that the inputted speech is that of the owner, execution means 22 executes an application using the text data obtained by the speech recognition. At this time, the execution means 22 may start up a car navigation application associated with driving a car, a map application, an application providing traffic information, or the like, and may display the result(s) of an information search with a

[0075] In a case where it is determined by the sensor

means 34 that the terminal 30 is placed in a charging cradle, the execution means 22 may display a clock application, a movie display, or the result(s) of an information search with a browser.

**[0076]** In addition, in a case where the sensor means 34 detects that the terminal 30 is being held in a horizontal orientation by the user, the execution means 22 may extract a television application, a camera application, or the like, and may display an icon for starting up these applications at the top of a list display.

[0077] According to the terminal 30 of the present exemplary embodiment, it is possible to appropriately select an application to be executed using the result(s) of speech recognition in accordance with the state in which the terminal is positioned, and to display content as anticipated by a user, as an execution result of an application. According to the terminal 30, it is possible to display a list of icons of applications anticipated by the user. Therefore, according to the terminal 30 of the present exemplary embodiment, the user can obtain desired result(s) as application execution result(s), and furthermore, can easily start up a desired application.

(First Example)

[0078] Based on a first example, a specific description is given concerning operations of the terminal 20 (FIG. 3) according to the second exemplary embodiment. FIG. 6 shows an example of content displayed in the display means 26 of the terminal 20 in the present example. The example assumes that an application using text data in which a user's speech is recognized is an Internet search application.

[0079] FIG. 6 (a) shows display content before the user operates a power button. In this state, the speech receiving means 14 of the terminal 20 is not receiving speech. [0080] When a push operation of a hardware key or a power button is detected, the power activation means 12 activates the power supply to the terminal 20 (step B1 in FIG. 4). Then the speech receiving means 14 starts an operation of receiving speech with the terminal 20 in a locked state (step B2). FIG. 6(b) shows an example of a screen in a locked state.

**[0081]** When the speech receiving means 14 receives speech, the voiceprint authentication means 16 performs voiceprint authentication based on the speech received in the locked state (step B3). The speech recognition means 18 converts the speech received in the locked state to text data by speech recognition. FIG. 6 (c) shows a situation where the voiceprint authentication means 16 and the speech recognition means 18 are operating.

**[0082]** As shown in FIG. 6 (a) to (c), when a hardware key is operated, for example, the terminal 20 starts speech reception in a locked state, and performs voice-print authentication and speech recognition. Therefore, the user need not expressly make an utterance in order to perform unlocking, and may utter a keyword to be searched by an Internet search, directed to the terminal

20 in the locked state. In the following, as an example, content uttered by the user is "Venue for tomorrow's Sumida River fireworks display."

**[0083]** The voiceprint authentication means 16 compares the voiceprint of speech uttered by the user and the voiceprint of the legitimate user as recorded in the voiceprint storage means 28, and determines whether or not the user is legitimate (step B3).

**[0084]** The speech recognition means 18 performs speech recognition of speech uttered by the user, and converts it to "Venue for tomorrow's Sumida River fireworks display" (step B4).

[0085] In a case of determining, by voiceprint authentication by the speech recognition means 18, that the person who spoke is the legitimate user of the terminal 20 (Yes in step B5), the execution means 22 performs an Internet search using the keywords of "Venue for tomorrow's Sumida River fireworks display," while allowing access to protected information (for example, cookie information) stored in the terminal 20, and outputs a search result to the display means 26. The lower part of FIG. 6 (d) shows Internet search result(s) 42 according to the keywords in question.

**[0086]** Furthermore, the execution means 22 extracts applications related to words included in the text data of "Venue for tomorrow's Sumida River fireworks display," and displays icons for starting up the extracted applications on the display means 26 (step B7). It is to be noted that in a case where an application related to words included in the text data is clear, the execution means may execute an application using the text data, and show execution result(s) on the display means 26.

[0087] In the upper part of FIG. 6 (d), a result 44 is displayed, where a map application, which is an application related to the keyword "venue," is executed with the keywords of "Venue for tomorrow's Sumida River fireworks display." Furthermore, in the middle part of FIG. 6 (b), as applications related to words included in the text data of "Venue for tomorrow's Sumida River fireworks display," an icon 46 for starting up a camera application, an icon 47 for starting up a public transport transfer information application, and an icon 48 for starting up a social media application are displayed.

[0088] On the other hand, in a case where it is not determined by voiceprint authentication by the speech recognition means 18 that the user of the terminal 20 is legitimate (No in step B5), the terminal 20 starts operations in a restricted mode (for example, guest mode). In the case of the restricted mode, the execution means 22 performs only Internet search, and does not read identification number or protected information that is stored in the terminal 20. At this time, a browser does not disclose any information of the terminal 20, and operates in a mode (secret mode) that discards cookie information. The execution means 22 performs an Internet search with text data obtained by speech recognition: "Venue for tomorrow's Sumida River fireworks display" as keywords (step B10), obtains search result(s) as a list, and

displays the list on the display means 26. FIG. 6(e) shows result(s) 52 of the Internet search at this time. Thereafter, the execution means 22 performs browsing in a secure mode browser.

**[0089]** According to the present exemplary embodiment, by uttering keyword(s) for an Internet search to a terminal in a locked state, the user of the terminal 20 can unlock the terminal and obtain Internet search result(s).

## (Second Example)

**[0090]** Based on a second example, a specific description is given concerning operations of the terminal 20 (FIG. 3) according to the second exemplary embodiment. The present example assumes an application using text data in which a user's voice is recognized to be a telephone calling application. In the following, a description is given concerning differences from the first example.

**[0091]** In the present example, a user utters the telephone number of another party, for example, to the terminal 20 that is in a locked state. Here, as an example, the content uttered by the user is assumed to be "01234567890."

**[0092]** The speech recognition means 18 performs speech recognition of speech uttered by the user, and converts it to "01234567890" (step B4).

**[0093]** In a case of determining, by voiceprint authentication by the speech recognition means 18, that the person who spoke is the legitimate user of the terminal 20 (Yes in step B5), the execution means 22 makes a call to the other party's telephone number "01234567890," using a telephone number assigned to the terminal 20, for example, as protected information that is stored in the terminal 20. In this way, a voice call with the other party is possible.

**[0094]** On the other hand, in a case where it is not determined by voiceprint authentication by the speech recognition means 18 that the user of the terminal 20 is legitimate (No in step B5), the terminal 20 starts operations in a restricted mode (for example, a guest mode). In the case of the restricted mode, the execution means 22 cannot read information (for example, the telephone number assigned to the terminal 20) stored in the terminal 20, and waits for call processing to be performed.

45 [0095] According to the present example, by only uttering the telephone number of the other party to the terminal that is in a locked state, the user of the terminal 20 can unlock the terminal and can start a voice call with the other party.

[0096] It is to be noted that the various disclosures of the abovementioned Patent Literature are incorporated herein by reference thereto. Modifications and adjustments of exemplary embodiments and examples may be made within the bounds of the entire disclosure (including the scope of the claims) of the present invention, and also based on fundamental technological concepts thereof. Furthermore, various combinations and selections of various disclosed elements (including respective

elements of the respective claims, respective elements of the respective exemplary embodiments and examples, respective elements of the respective drawings, and the like) are possible within the scope of the claims of the present invention. That is, the present invention clearly includes every type of transformation and modification that a person skilled in the art can realize according to the entire disclosure including the scope of the claims and to technological concepts thereof. In particular, with regard to numerical ranges described herein, arbitrary numerical values and small ranges included in the relevant ranges should be interpreted to be specifically described even where there is no particular description thereof

**[0097]** It is to be noted that the following modes are possible in the present invention.

(First Mode)

**[0098]** A terminal may be the terminal according to the first aspect described above.

(Second Mode)

**[0099]** The terminal may comprise power activation means that activates a power supply to the terminal if a prescribed operation is detected, wherein the speech receiving means may start receiving speech in the locked state if the power supply to the terminal is activated in response to the prescribed operation.

(Third Mode)

**[0100]** The terminal may comprise sensor means that measures a prescribed physical amount, wherein the speech receiving means may start receiving speech in the locked state if the physical amount measured by the sensor means is a prescribed value.

(Fourth Mode)

**[0101]** In the terminal, the execution means may execute the application using the result of the speech recognition while allowing access to protected information stored in the terminal if the voiceprint authentication determined that the user is legitimate.

(Fifth Mode)

**[0102]** In the terminal, the execution means may execute the application using the result of the speech recognition, while forbidding access to protected information stored in the terminal if the voiceprint authentication does not determine that the user is legitimate.

(Sixth Mode)

[0103] In the terminal, the execution means may ex-

tract an application(s) related to word(s) included in the result of the speech recognition and display a list of the extracted application(s) on a screen of the terminal if the voiceprint authentication determines that the user is legitimate.

(Seventh Mode)

**[0104]** In the terminal, the execution means may extract an application(s) according to orientation of the terminal or type of a peripheral device to which the terminal is connected and display a list of the extracted application(s) on a screen of the terminal if the voiceprint authentication determines that the user is legitimate.

(Eighth Mode)

**[0105]** An unlocking method may be the unlocking method according to the second aspect described above.

(Ninth Mode)

**[0106]** The unlocking method may comprise: by the terminal, activating a power supply to the terminal if a prescribed operation is detected by the terminal, wherein speech reception in the locked state is started if a power supply to the terminal is activated in response to the prescribed operation.

(Tenth Mode)

**[0107]** The unlocking method may comprise: by the terminal, measuring a prescribed physical amount by the terminal, wherein speech reception in the locked state is started if the measured physical amount is a prescribed value.

(Eleventh Mode)

[0108] In the unlocking method, the terminal may execute the application using the result of the speech recognition while allowing access to protected information stored in the terminal if the voiceprint authentication determines that a user is legitimate.

(Twelfth Mode)

45

**[0109]** In the unlocking method, the terminal may execute the application using the result of the speech recognition while forbidding access to protected information stored in the terminal if the voiceprint authentication does not determine that the user is legitimate.

(Thirteenth Mode)

**[0110]** The unlocking method may comprise: by the terminal, extracting an application(s) related to word(s) included in the result of the speech recognition if the

15

20

voiceprint authentication determines that the user is legitimate; and displaying a list of the extracted application(s) on a screen of the terminal.

(Fourteenth Mode)

**[0111]** The unlocking method may comprise: by the terminal, extracting an application(s) according to orientation of the terminal, or type of a peripheral device to which the terminal is connected if the voiceprint authentication determines that the user is legitimate; and displaying a list of the extracted application(s) on a screen of the terminal.

(Fifteenth Mode)

**[0112]** A program may be the program according to the third aspect described above.

(Sixteenth Mode)

**[0113]** The program may cause the computer to execute: activating a power supply to the terminal if a prescribed operation is detected; and starting speech reception in the locked state if the power supply to the terminal is activated in response to the prescribed operation.

(Seventeenth Mode)

**[0114]** The program may cause the computer to execute: measuring a prescribed physical amount; and starting speech reception in the locked state if the measured physical amount is a prescribed value.

(Eighteenth Mode)

**[0115]** The program may cause the computer to execute: executing the application using the result of the speech recognition, while allowing access to protected information stored in the terminal if the voiceprint authentication determines that the user is legitimate.

(Nineteenth Mode)

**[0116]** The program may cause the computer to execute: executing the application using the result of the speech recognition while forbidding access to protected information stored in the terminal if the voiceprint authentication does not determine that the user is legitimate.

(Twentieth Mode)

**[0117]** The program may cause the computer to execute: extracting an application(s) related to word(s) included in the result of the speech recognition if the voice-print authentication determines that the user is legitimate; and displaying a list of the extracted application(s) on a screen of the terminal.

(Twenty-first Mode)

**[0118]** The program may cause the computer to execute: extracting an application(s) according to orientation of the terminal, or type of a peripheral device to which the terminal is connected if the voiceprint authentication determines that the user is legitimate; and displaying a list of the extracted application(s) on a screen of the terminal.

#### REFERENCE SIGNS LIST

## [0119]

10, 20, 30 terminal

12 power activation means

14 speech receiving means

16 voiceprint authentication means

18 speech recognition means

22 execution means

24 touch panel means

26 display means

28 voiceprint storage means

32 application storage means

34 sensor means

42, 44, 52 result(s)

46-48 icon

#### O Claims

35

40

45

50

**1.** A terminal, comprising:

speech receiving means that receives speech in a locked state;

voiceprint authentication means that performs voiceprint authentication based on the speech received in the locked state and determining whether or not a user is legitimate;

speech recognition means that performs speech recognition of the speech received in the locked state; and

execution means that executes an application using a result of the speech recognition.

**2.** The terminal according to claim 1, comprising:

power activation means that activates a power supply to the terminal if a prescribed operation is detected, wherein

the speech receiving means starts receiving speech in the locked state if the power supply to the terminal is activated in response to the prescribed operation.

3. The terminal according to claim 1, comprising:

sensor means that measures a prescribed phys-

15

30

40

45

50

ical amount, wherein

the speech receiving means starts receiving speech in the locked state if the physical amount measured by the sensor means is a prescribed value.

The terminal according to any one of claims 1 to 3, wherein

the execution means executes the application using the result of the speech recognition while allowing access to protected information stored in the terminal if the voiceprint authentication determined that the user is legitimate.

The terminal according to any one of claims 1 to 4, wherein

the execution means executes the application using the result of the speech recognition, while forbidding access to protected information stored in the terminal if the voiceprint authentication does not determine that the user is legitimate.

- 6. The terminal according to any one of claims 1 to 5, wherein the execution means extracts an application(s) related to word(s) included in the result of the speech recognition and displays a list of the extracted application(s) on a screen of the terminal if the voiceprint authentication determines that the user is legitimate.
- The terminal according to any one of claims 1 to 5, wherein

the execution means extracts an application(s) according to orientation of the terminal or type of a peripheral device to which the terminal is connected and displays a list of the extracted application(s) on a screen of the terminal if the voiceprint authentication determines that the user is legitimate.

8. An unlocking method, comprising:

by a terminal, receiving speech in a locked state; performing voiceprint authentication based on the speech received in the locked state and determining whether or not a user is legitimate; performing speech recognition of the speech received in the locked state; and executing an application using a result of the speech recognition.

**9.** The unlocking method according to claim 8, comprising:

by the terminal, activating a power supply to the terminal if a prescribed operation is detected by the terminal, wherein

speech reception in the locked state is started if a power supply to the terminal is activated in

response to the prescribed operation.

**10.** The unlocking method according to claim 8, comprising:

by the terminal, measuring a prescribed physical amount by the terminal, wherein speech reception in the locked state is started if the measured physical amount is a prescribed value

**11.** The unlocking method according to any one of claims 8 to 10, wherein

the terminal executes the application using the result of the speech recognition while allowing access to protected information stored in the terminal if the voiceprint authentication determines that a user is legitimate.

12. The unlocking method according to any one of claims 8 to 11, wherein

the terminal executes the application using the result of the speech recognition while forbidding access to protected information stored in the terminal if the voiceprint authentication does not determine that the user is legitimate.

**13.** The unlocking method according to any one of claims 8 to 12, comprising:

by the terminal, extracting an application(s) related to word(s) included in the result of the speech recognition if the voiceprint authentication determines that the user is legitimate; and displaying a list of the extracted application(s) on a screen of the terminal.

**14.** The unlocking method according to any one of claims 8 to 12, comprising:

by the terminal, extracting an application(s) according to orientation of the terminal, or type of a peripheral device to which the terminal is connected if the voiceprint authentication determines that the user is legitimate; and displaying a list of the extracted application(s) on a screen of the terminal.

**15.** A program, causing a computer provided in a terminal to execute:

receiving speech in a locked state; performing voiceprint authentication based on the speech received in the locked state and determining whether or not a user is legitimate; performing speech recognition of the speech received in the locked state; and executing an application using a result of the speech recognition.

16. The program according to claim 15, causing the computer to execute:

> activating a power supply to the terminal if a prescribed operation is detected; and starting speech reception in the locked state if the power supply to the terminal is activated in response to the prescribed operation.

17. The program according to claim 15, causing the computer to execute:

> measuring a prescribed physical amount; and starting speech reception in the locked state if the measured physical amount is a prescribed value.

18. The program according to any one of claims 15 to 17, causing the computer to execute:

> executing the application using the result of the speech recognition, while allowing access to protected information stored in the terminal if the voiceprint authentication determines that the user is legitimate.

19. The program according to any one of claims 15 to 18, causing the computer to execute:

> executing the application using the result of the speech recognition while forbidding access to protected information stored in the terminal if the voiceprint authentication does not determine that the user is legitimate.

20. The program according to any one of claims 15 to 19, causing the computer to execute:

> extracting an application(s) related to word(s) included in the result of the speech recognition if the voiceprint authentication determines that the user is legitimate; and displaying a list of the extracted application(s) on a screen of the terminal.

21. The program according to any one of claims 15 to 19, causing the computer to execute:

> extracting an application(s) according to orientation of the terminal, or type of a peripheral device to which the terminal is connected if the voiceprint authentication determines that the user is legitimate; and displaying a list of the extracted application(s) on a screen of the terminal.

5

10

15


30

40

12

55

FIG. 1

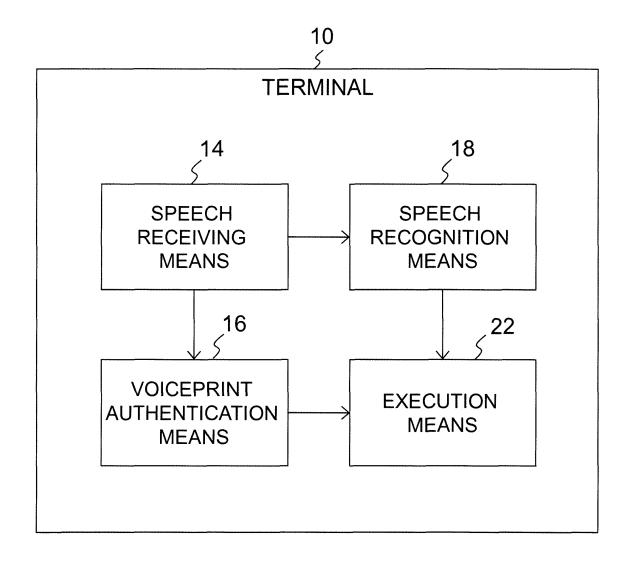

# FIG. 2

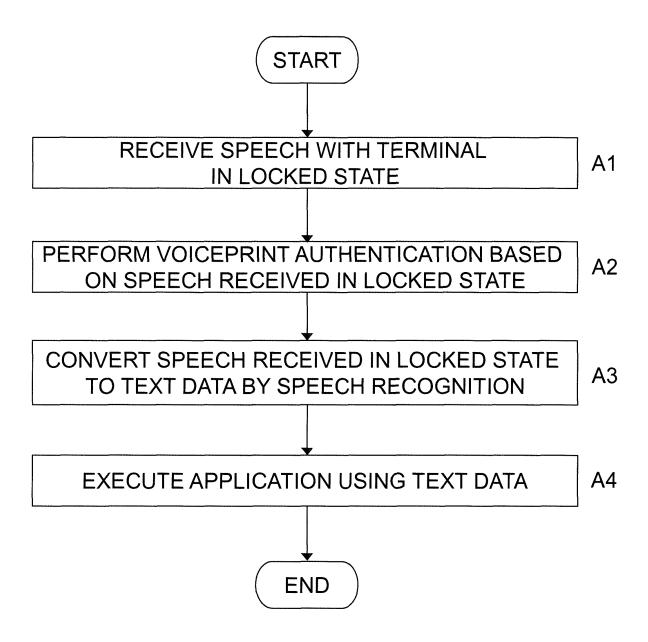
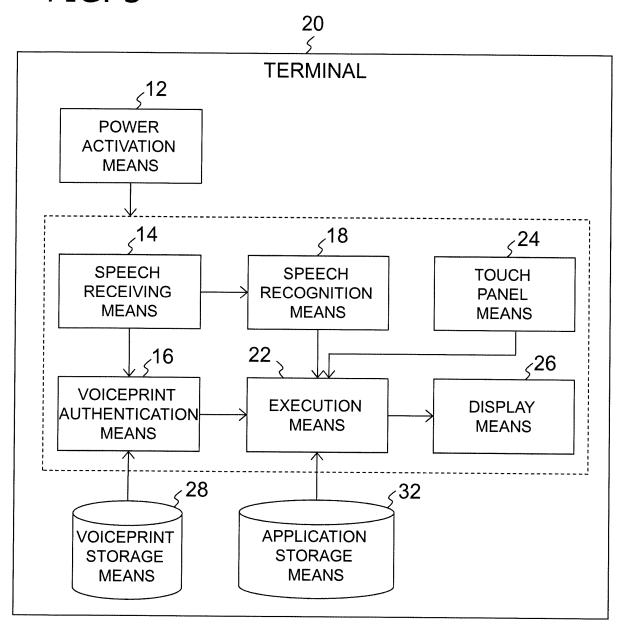


FIG. 3





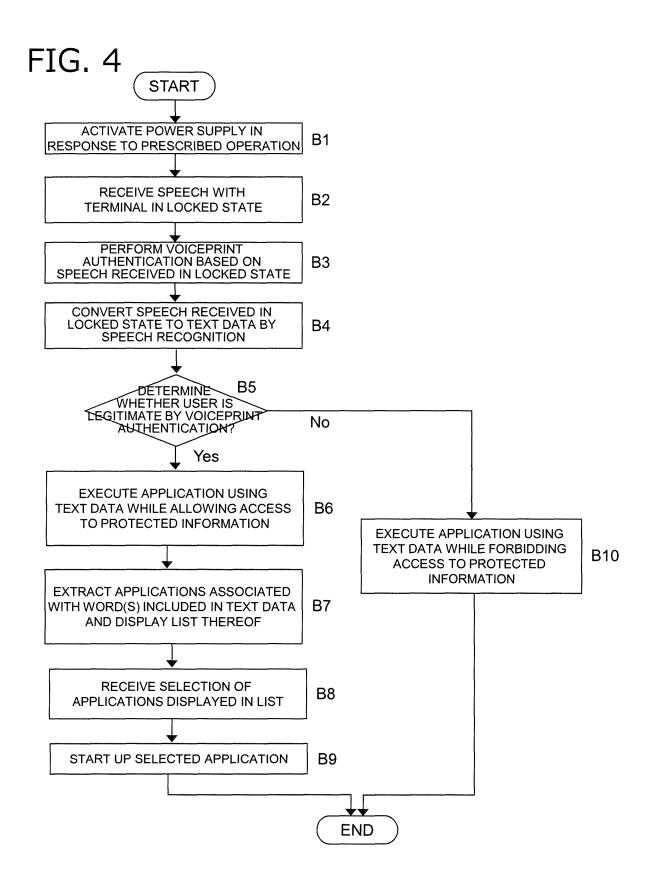


FIG. 5

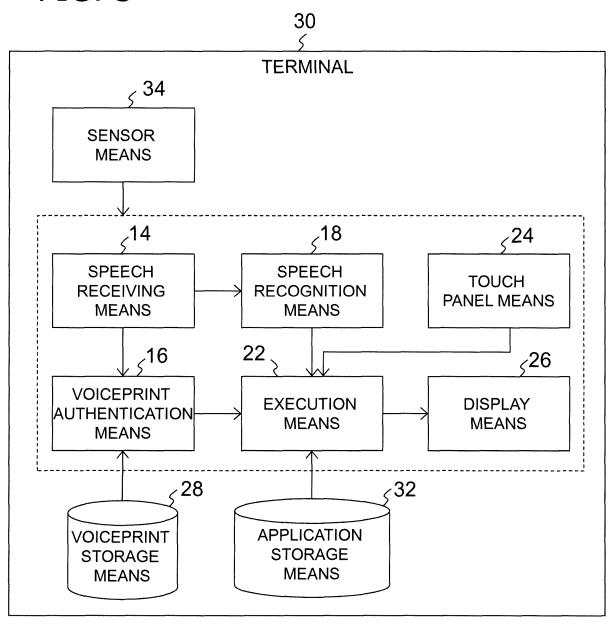

## FIG. 6

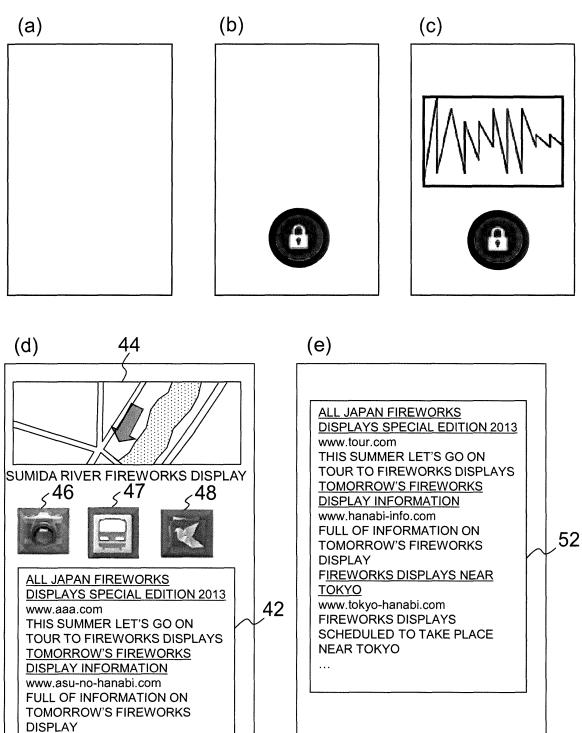

#### EP 2 945 090 A1

#### INTERNATIONAL SEARCH REPORT International application No. PCT/JP2014/050180 5 A. CLASSIFICATION OF SUBJECT MATTER G06F21/32(2013.01)i, G10L15/00(2013.01)i, G10L17/00(2013.01)i According to International Patent Classification (IPC) or to both national classification and IPC 10 FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) G06F21/32, G10L15/00, G10L17/00 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched 15 Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2014 Toroku Jitsuyo Shinan Koho Kokai Jitsuyo Shinan Koho 1971-2014 1994-2014 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) 20 C. DOCUMENTS CONSIDERED TO BE RELEVANT Category\* Citation of document, with indication, where appropriate, of the relevant passages Relevant to claim No. "au DIGNO S", [online], Kyocera Corp., 2012.10, 1-4,6,8-11, Υ [retrieval date 03 April 2014 (03.04.2014)], 13,15-18,20 25 Internet <URL:http://www.kyocera.co.jp/prdct/</pre> 5,7,12,14, Α telecom/consumer/kyl21/catalog/pdf/dignos 19,21 catalog.pdf> "au KYL21 DIGNO S 4G LTE Toriatsukai 1-4,6,8-11, Υ Setsumeisho Shosaiban", [online], 1st edition, Kyocera Corp., 2012.10, pages 31, 41, 113, 150 13,15-18,20 30 Α 5,7,12,14, to 151, [retrieval date 03 April 2014 (03.04. 19,21 2014)], Internet <URL:http://media.kddi.com/app /publish/torisetsu/pdf/kyl21 torisetsu shousai. pdf> 35 × Further documents are listed in the continuation of Box C. See patent family annex. 40 Special categories of cited documents: later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention document defining the general state of the art which is not considered to "E" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone earlier application or patent but published on or after the international filing document which may throw doubts on priority claim(s) or which is 45 cited to establish the publication date of another citation or other special reason (as specified) document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the document member of the same patent family priority date claimed Date of mailing of the international search report Date of the actual completion of the international search 50 04 April, 2014 (04.04.14) 15 April, 2014 (15.04.14) Name and mailing address of the ISA/ Authorized officer Japanese Patent Office Telephone No. 55 Form PCT/ISA/210 (second sheet) (July 2009)

## EP 2 945 090 A1

# INTERNATIONAL SEARCH REPORT International application No. PCT/JP2014/050180

5		PCT/JP2014/050180		
	C (Continuation	C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
	Category*			Relevant to claim No.
10	Y A	Suzumari, "'DIGNO S KYL21' Kaihatsusha Interview Daiyoryo Battery to 'Sugu' ni Kodawatta Sosasei", [online], Impress Wat Corp., 13 November 2012 (13.11.2012), [retrieval date 03 April 2014 (03.04.2014) Internet <url:http: k-tai.impress.co.jp,<br="">interview/20121113_571709.html&gt;</url:http:>	4)],	1-4,6,8-11, 13,15-18,20 5,7,12,14, 19,21
15	Y A	JP 2003-345390 A (Matsushita Electric Industrial Co., Ltd.), 03 December 2003 (03.12.2003), paragraphs [0009] to [0030]; fig. 1, 4 (Family: none)		3,10,17 5,7,12,14, 19,21
20	А	US 2012/0166365 A1 (Gokhan TUR), 28 June 2012 (28.06.2012), paragraphs [0013] to [0064] & WO 2011/028842 A2 & WO 2011/028844 & US 2012/0173464 A1 & EP 2473916 A	A2	1-21
25	A	JP 2000-224663 A (NEC Saitama, Ltd.), 11 August 2000 (11.08.2000), paragraphs [0015] to [0021]; fig. 1 to 2 (Family: none)		1-21
30	А	JP 2002-312318 A (NEC Corp.), 25 October 2002 (25.10.2002), paragraphs [0020] to [0069]; fig. 2, 4 & US 2002/0152070 A1 & GB 2378297 A & CN 1382005 A		1-21
35				
40				
45				
50				

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

## EP 2 945 090 A1

### REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

## Patent documents cited in the description

- JP 2013002387 A [0001]
- JP 2002236666 A **[0010]**
- JP 2004180254 A **[0010]**

- JP 2007140048 A **[0010]**
- JP 2011087110 A **[0010]**