(11) **EP 1 437 800 A1**

(12)

EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(43) Date of publication: 14.07.2004 Bulletin 2004/29

(21) Application number: 01972499.6

(22) Date of filing: 26.09.2001

(51) Int Cl.⁷: **H01R 12/24**, H01R 12/08, H01R 12/38

(86) International application number: **PCT/JP2001/008363**

(87) International publication number: WO 2003/032444 (17.04.2003 Gazette 2003/16)

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

(71) Applicants:

 JAPAN AVIATION ELECTRONICS INDUSTRY, LIMITED Shibuya-ku, Tokyo 150-0043 (JP)

 NEC Corporation Minato-ku, Tokyo 108-8001 (JP) (72) Inventors:

 SATO, Kazuomi, Japan Aviation Electronics Ind.,Ltd Tokyo 150-0043 (JP)

 YAMAUCHI, Masahiro, c/o NEC Corporation Tokyo 108-8001 (JP)

(74) Representative: Brookhuis, Hendrik Jan Arnold
 Exter Polak & Charlouis B.V.
 P.O. Box 3241
 2280 GE Rijswijk (NL)

(54) CONNECTOR FOR FLAT CABLE

(57) Having conductive contacts (4), a first insulator (1) retaining the contacts, and a cable-side insulator, attachable/detachable relative to the first insulator, for retaining a flat cable (6). The cable-side insulator includes a second insulator (2) for receiving the flat cable, a third insulator (3) disposed so as to confront the second insulator via the flat cable, and a clamp (7) interposed be-

tween the flat cable and the third insulator. When the cable-side insulator is mounted to the first insulator, the second and third insulators are engaged with the first insulator to approach each other so that the flat cable is sandwiched between the clamp and the second insulator. In this state, the flat cable is connected to the contacts.

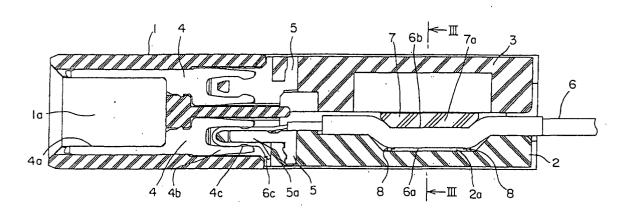


FIG. 2

Description

Technical Field

[0001] The present invention relates to a connector used for connecting a flat cable and, in particular, relates to a structure for retaining the flat cable by the connector.

Background Art

[0002] A connector used for connecting a flat cable is disclosed in, for example, Japanese Patent Publication (JP-B) No. H3-45511. This connector comprises a contact-side insulator retaining conductive contacts, and a cable-side insulator retaining a flat cable. The cable-side insulator is attachable/detachable relative to the contact-side insulator. When the cable-side insulator is attached to the contact-side insulator, wires of the flat cable are brought into pressure contact with the contacts. In this manner, the flat cable is connected to the connector.

[0003] In the connector of this type, it is necessary that the contacts and the flat cable are securely fixed/retained relative to the contact-side insulator and the cable-side insulator, respectively. The contacts can be retained relatively easily by providing mutual engagement structures between the contact-side insulator and the contacts. For example, by optionally contriving a shape of contacts, it is possible to engage the contacts with the contact-side insulator.

[0004] On the other hand, since the flat cable has a standardized simple shape as is well known, it is relatively difficult to retain it relative to the cable-side insulator. Movement of the flat cable relative to the cable-side insulator impedes the pressure-contact contention between the wires of the flat cable and the contacts, and thus should be avoided. To this end, for example, an attempt has been made to stick a flat cable onto a cable-side insulator using adhesives, or to form a curved portion on a flat cable in advance and engage a cable-side insulator with the curved portion.

[0005] According to those conventional techniques, however, the retention of the flat cable relative to the cable-side insulator is insufficient. Further, complicated facilities are required for automating assembly of the connector, which thus raises a problem also in terms of economics.

[0006] It is therefore an object of the present invention to provide a connector for a flat cable, which can securely retain the flat cable and economically cope with automation of assembly.

Disclosure of the Invention

[0007] According to the present invention, there is obtained a connector including conductive contacts, a first insulator retaining the contacts, and a cable-side insulator, attachable/detachable relative to the first insulator,

for retaining a flat cable, wherein when the cable-side insulator is mounted to the first insulator, the flat cable is connected to the contacts, the connector characterized in that the cable-side insulator comprises a second insulator for receiving the flat cable, a third insulator disposed so as to confront the second insulator via the flat cable, and a clamp interposed between the flat cable and the third insulator and, when the cable-side insulator is mounted to the first insulator, the second and third insulators are engaged with the first insulator to approach each other so that the flat cable is sandwiched between the clamp and the second insulator.

[0008] The third insulator may comprise a rib that pushes the clamp toward the flat cable.

[0009] The first insulator may have a guide groove for guiding the cable-side insulator to be attached/detached, and the second and third insulators may have convex portions, respectively, which are inserted into the guide groove.

[0010] The second insulator may have a concave portion confronting the clamp, and the flat cable may be pushed into the concave portion by the clamp.

[0011] The flat cable may comprise a plurality of cable elements, and the second insulator and the clamp may have a function of conjointly arraying the cable elements.

[0012] The third insulator may be an integral body.

[0013] The third insulator may comprise an additional insulator having the same shape and size as the second insulator, and an additional clamp interposed between the additional insulator and the clamp and, when the cable-side insulator is mounted to the first insulator, the additional insulator along with the second insulator may be engaged with the first insulator to cause the additional clamp to approach the second insulator so that the foregoing clamp may be pushed toward the second insulator by the additional clamp.

[0014] The additional insulator may directly contact with the additional clamp.

[0015] Additional conductive contacts retained by the first insulator and connected with an additional flat cable may be included, and the additional flat cable may be sandwiched between the additional insulator and the additional clamp.

[0016] Further, according to the present invention, there is obtained a flat cable connector capable of connecting one or two flat cables based on selection thereof, the flat cable connector characterized in that the connector comprises contacts to be connected with wires of the flat cable, a first insulator retaining the contacts, a second insulator for arraying the wires of the flat cable and formed with a concave portion for receiving the flat cable, a clamp for sandwiching the flat cable conjointly with the second insulator, and a third insulator formed with a rib to be brought into contact with the clamp and, when connecting the two flat cables, a plurality of the second insulators, two in number, and a plurality of the clamps, two in number, are used such that the two

20

clamps are caused to confront each other, and the first insulator and the two second insulators are fixed together, and when connecting the one flat cable, the one second insulator, the one clamp, and the third insulator are used such that the clamp and the rib of the third insulator are brought into contact with each other, and the first insulator, the second insulator, and the third insulator are fixed together.

[0017] The flat cable may be formed with a generally crank-shaped convex portion, and the convex portion may be received in the concave portion of the second insulator.

Brief Description of the Drawings

[0018]

Fig. 1 shows a connector according to a first embodiment of the present invention, wherein (a) shows a bottom view, (b) shows a left side view (a diagram seen from a fitting side with a counterpart connector), (c) shows a front view, (d) shows a right side view, and (e) shows a rear view, respectively. Fig. 2 is a sectional view taken along line II-II in Fig. 1(c).

Fig. 3 is a sectional view taken along line III-III in Fig. 2.

Fig. 4 is a sectional view, like Fig. 2, of a connector according to a second embodiment of the present invention.

Fig. 5 is a sectional view, like Fig. 2, of a connector according to a third embodiment of the present invention.

Fig. 6 is a sectional view taken along line VI-VI in Fig. 5.

Best Mode for Embodying the Invention

[0019] Referring to Figs. 1 to 3, description will be made of a connector according to a first embodiment of the present invention.

[0020] The connector of Figs. 1 to 3 is used for connecting one flat cable 6 such as a flat ribbon cable, and comprises a first insulator 1, a second insulator 2, and a third insulator 3. In Figs. 1(a) and 2, the first insulator 1 is disposed on the left side, the second insulator 2 is disposed roughly on the lower right side, and the third insulator 3 is disposed roughly on the upper right side. These insulators 1, 2, and 3 are fitted together according to a later-described structure to form an insulator portion of the connector.

[0021] The first insulator 1 fixedly retains first conductive contacts 4 divided into an upper side and a lower side and confronting each other in a vertical direction. The first contacts 4 are arrayed in large numbers on the upper side and the lower side, respectively.

[0022] Each of the first contacts 4 comprises a contact portion 4a for obtaining electrical connection to a coun-

terpart connector, and a generally U-shaped tuning fork portion 4b. Inside the tuning fork portion 4b, connecting portions 4c are projectingly formed. The contact portions 4a of the first contacts 4 are arranged in an opening portion 1a of the first insulator 1 so as to confront each other in the vertical direction. The first insulator 1 forms a contact-side insulator.

[0023] The second insulator 2 fixedly retains second conductive contacts 5. The second contacts 5 are arrayed corresponding to the first contacts 4 on the lower side. The second insulator 2 is formed with a concave portion 2a having a generally trapezoidal shape in section and confronting the third insulator 3. The concave portion 2a is formed with two confronting portions 8.

[0024] The flat cable 6 is disposed between the second and third insulators 2 and 3. Thereupon, a generally crank-shaped portion defined by a convex portion 6a and a concave portion 6b formed in the flat cable 6 is disposed in the concave portion 2a of the second insulator 2.

[0025] The connector of Figs. 1 to 3 further comprises an insulating clamp 7 interposed between the third insulator 3 and the flat cable 6. The clamp 7 has a portion 7a having a generally trapezoidal shape in section and confronting the concave portion 2a of the second insulator 2. The generally crank-shaped portion of the flat cable 6 is sandwiched between the portion 7a having the generally trapezoidal shape in section and the confronting portions 8. The second and third insulators 2 and 3 conjointly form a cable-side insulator.

[0026] Projecting portions 7c are formed on both left and right sides of the clamp 7. Holes 2b are formed at both left and right side portions of the second insulator 2. Rails 2c are formed on both left and right side surfaces of the second insulator 2. The third insulator 3 is formed with several ribs 3a. Rails 3b are formed on both left and right side surfaces of the third insulator 3. The first insulator 1 is formed with grooves 1 b. Incidentally, wires 6c are each bent into a shape approximate to a predetermined U-shape in advance.

[0027] The projecting portions 7c of the clamp 7 are inserted into the holes 2b of the second insulator 2 in the state where the flat cable 6 is sandwiched as described above. The ribs 3a of the third insulator 3 and the rails 3b of the third insulator 3 are mounted on an upper surface of the clamp 7 and upper surfaces of the rails 2c of the second insulator 2.

[0028] Further, each rail 2c of the second insulator 2 and each rail 3b of the third insulator 3 are fitted into the groove 1b of the first insulator 1, then the first insulator 1 is slided relative to the second and third insulators 2 and 3. Then, by fitting between the rails 2c and 3b and the grooves 1b, the second and third insulators 2 and 3 are engaged with the first insulator 1 in the vertical direction so as to approach each other. As a result, the flat cable 6 is firmly sandwiched between the second insulator 2 and the clamp 7.

[0029] Further, when the first insulator 1 is slided rel-

ative to the second and third insulators 2 and 3, the wires 6c at the tip of the flat cable 6 are each sandwiched between the tuning fork portion 4b and a tip portion 5a of the second contact 5 so as to be reformed into the predetermined U-shape. As a result, the wires 6c of the flat cable 6 and the connecting portions 4c of the first contacts 4 suitably contact with each other to be electrically connected. Incidentally, as shown in Fig. 1, the first insulator 1, the second insulator 2, and the third insulator 3 are fixed together by inserting anti-release pins 9 into through holes that are formed at upper and lower two portions, respectively.

5

[0030] In Fig. 2, when the flat cable 6 is pulled rightward, the clamp 7 is pushed by the concave portion 6b of the flat cable 6 so as to attempt to move upward. However, as shown in Fig. 3, the several ribs 3a of the third insulator 3 prevent upward movement (rise) of the clamp 7. Therefore, the flat cable 6 is firmly retained by the connector so that pulling-out thereof is prevented.

[0031] Referring to Fig. 4, description will be made of a connector according to a second embodiment of the present invention. Like portions are assigned the same reference symbols so that description thereof may be omitted. Those portions of which description is omitted have the same structures as the connector of Figs. 1 to 3.

[0032] The connector of Fig. 4 employs, instead of the third insulator 3 in the connector of Figs. 1 to 3, an additional insulator 2' having the same shape and size as the second insulator 2, and an insulating additional clamp 7', as a filling member, interposed between the additional insulator 2' and the clamp 7. The additional clamp 7' has a portion 7a' having a generally trapezoidal shape in section and fitted in a concave portion 2a' of the additional insulator 2', and is formed sufficiently larger than the concave portion 2a of the second insulator 2. [0033] When the second insulator 2 and the additional insulator 2' are mounted to the first insulator 1, the additional insulator 2' along with the second insulator 2 is engaged with the first insulator 1 in the vertical direction to cause the additional clamp 7' to approach the second insulator 2, according to the structure like the connector of Figs. 1 to 3. Consequently, the foregoing clamp 7 is pushed toward the second insulator 2 by the additional clamp 7'. In this event, the additional insulator 2' directly contacts with the additional clamp 7'. As a result, the flat cable 6 is firmly sandwiched between the second insulator 2 and the clamp 7.

[0034] Referring to Figs. 5 and 6, description will be made of a connector according to a third embodiment of the present invention. Like portions are assigned the same reference symbols so that description thereof may be omitted. Those portions of which description is omitted have the same structures as the connector of Figs. 1 to 3.

[0035] The connector of Figs. 5 and 6 is used when connecting two flat cables 6 one over the other. In this case, instead of the additional clamp 7' in the connector

of Fig. 4, use is made of an insulating additional clamp 7" having the same shape and size as the clamp 7 in the connector of Figs. 1 to 3. That is, use is made of two insulators and two clamps that are the same as the second insulator 2 and the clamp 7 in the connector of Figs. 1 to 3. Therefore, the additional clamp 7" also has a portion 7a" having a generally trapezoidal shape in section and fitted in a concave portion 2a' of an additional insulator 2'.

[0036] The additional insulator 2' also fixedly retains second contacts 5. The second contacts 5 of the additional insulator 2' are arrayed corresponding to the first contacts 4 on the upper side. The additional insulator 2' is formed with the concave portion 2a' having a generally trapezoidal shape in section. The concave portion 2a' is formed with confronting portions 8'.

[0037] Projecting portions 7c" are formed on both left and right sides of the additional clamp 7". Holes 2b' are formed at both left and right side portions of the additional insulator 2'. Rails 2c' are formed on both left and right side surfaces of the additional insulator 2'.

[0038] The flat cable is disposed between the second insulator 2 and the clamp 7 like in the connector of Fig. 4, and besides, the flat cable 6 is disposed also between the additional insulator 2' and the additional clamp 7". Thereupon, a generally crank-shaped portion defined by a convex portion 6a and a concave portion 6b formed in the flat cable 6 is disposed in the concave portion 2a' of the additional insulator 2'.

[0039] When the second insulator 2 and the additional insulator 2' are mounted to the first insulator 1 following fitting between the rails 2c and 2c' and the grooves 1b, the additional insulator 2' along with the second insulator 2 is engaged with the first insulator 1 in the vertical direction to approach each other, according to the structure like the connector of Figs. 1 to 3. As a result, the flat cable 6 is firmly sandwiched between the second insulator 2 and the clamp 7, and besides, the flat cable 6 is firmly sandwiched also between the additional insulator 2' and the additional clamp 7".

[0040] Incidentally, when connecting one flat cable in the connector of Figs. 5 and 6, the additional clamp 7" may be replaced with the additional clamp 7' in the connector of Fig. 4, or the additional insulator 2' and the additional clamp 7" may be replaced with the third insulator 3 in the connector of Figs. 1 to 3. In this manner, it is possible to easily carry out connection of one flat cable or connection of two flat cables by exchanging the components.

Industrial Applicability

[0041] The connector for a flat cable of the present invention is suitable as a connection device for a flat cable used in a computer, a portable telephone, or the like.

50

20

30

40

Claims

- 1. A connector including conductive contacts, a first insulator retaining said contacts, and a cable-side insulator, attachable/detachable relative to said first insulator, for retaining a flat cable, wherein when said cable-side insulator is mounted to said first insulator, said flat cable is connected to said contacts, said connector characterized in that said cableside insulator comprises a second insulator for receiving said flat cable, a third insulator disposed so as to confront said second insulator via said flat cable, and a clamp interposed between said flat cable and said third insulator and, when said cable-side insulator is mounted to said first insulator, said second and third insulators are engaged with said first insulator to approach each other so that said flat cable is sandwiched between said clamp and said second insulator.
- 2. A connector according to claim 1, wherein said third insulator comprises a rib that pushes said clamp toward said flat cable.
- 3. A connector according to claim 1, wherein said first 25 insulator has a guide groove for guiding said cableside insulator to be attached/detached, and said second and third insulators have convex portions, respectively, which are inserted into said guide groove.
- 4. A connector according to claim 1, wherein said second insulator has a concave portion confronting said clamp, and said flat cable is pushed into said concave portion by said clamp.
- 5. A connector according to claim 1, wherein said flat cable comprises a plurality of cable elements, and said second insulator and said clamp have a function of conjointly arraying said cable elements.
- 6. A connector according to claim 1, wherein said third insulator is an integral body.
- 7. A connector according to claim 1, wherein said third insulator comprises an additional insulator having the same shape and size as said second insulator, and an additional clamp interposed between said additional insulator and said clamp and, when said cable-side insulator is mounted to said first insulator, said additional insulator along with said second insulator is engaged with said first insulator to cause said additional clamp to approach said second insulator so that the foregoing clamp is pushed toward said second insulator by said additional 55 clamp.
- 8. A connector according to claim 7, wherein said ad-

ditional insulator directly contacts with said additional clamp.

- A connector according to claim 7, further comprising additional conductive contacts retained by said first insulator and connected with an additional flat cable, wherein said additional flat cable is sandwiched between said additional insulator and said additional clamp.
- **10.** A flat cable connector capable of connecting one or two flat cables based on selection thereof, said flat cable connector characterized in that


said connector comprises contacts to be connected with wires of said flat cable, a first insulator retaining said contacts, a second insulator for arraying the wires of said flat cable and formed with a concave portion for receiving said flat cable, a clamp for sandwiching said flat cable conjointly with said second insulator, and a third insulator formed with a rib to be brought into contact with said clamp,


when connecting said two flat cables, a plurlaity of said second insulators, two in number, and a plurality of said clamps, two in number, are used such that said two clamps are caused to confront each other, and said first insulator and said two second insulators are fixed together, and

when connecting said one flat cable, said one second insulator, said one clamp, and said third insulator are used such that said clamp and said rib of the third insulator are brought into contact with each other, and said first insulator, said second insulator, and said third insulator are fixed together.

11. A flat cable connector according to claim 10, characterized in that said flat cable is formed with a generally crank-shaped convex portion, and said convex portion is received in said concave portion of the second insulator.

5

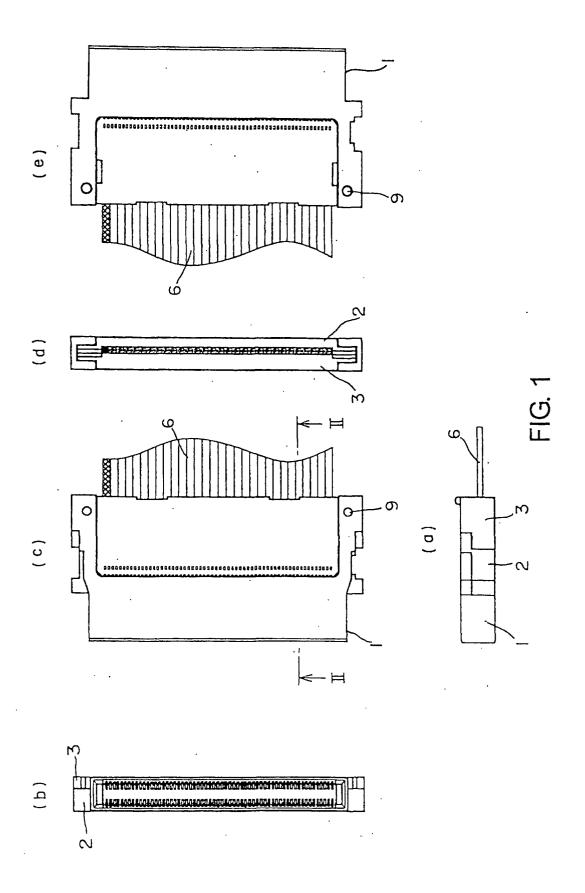

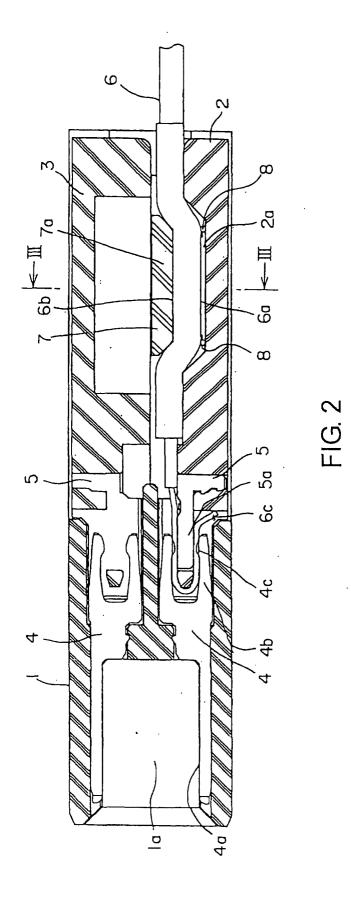




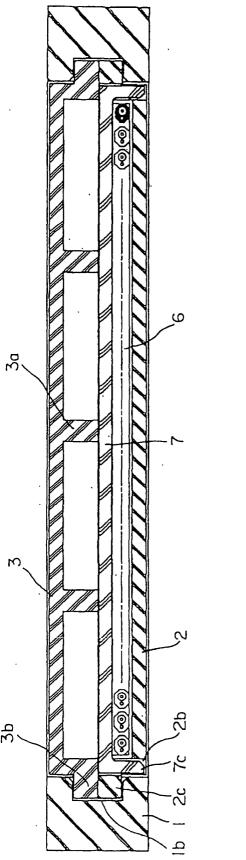


FIG. 3

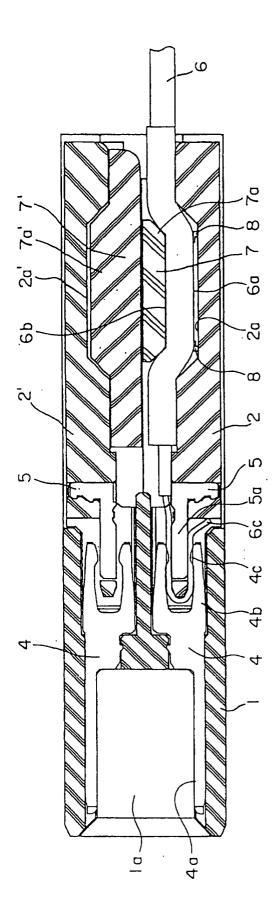

F1G. 4

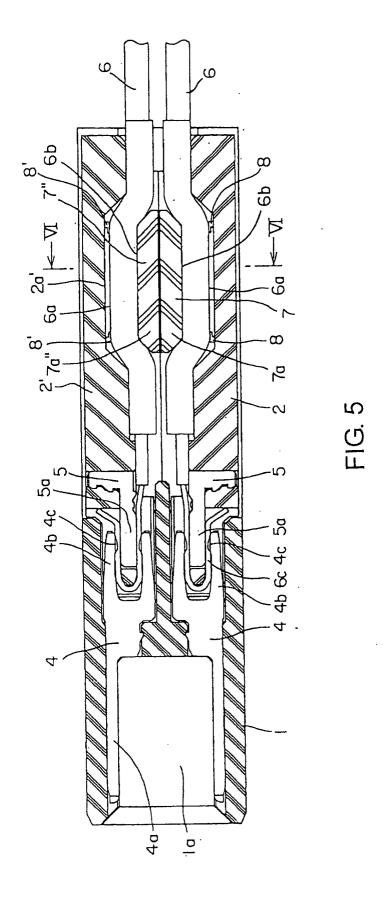

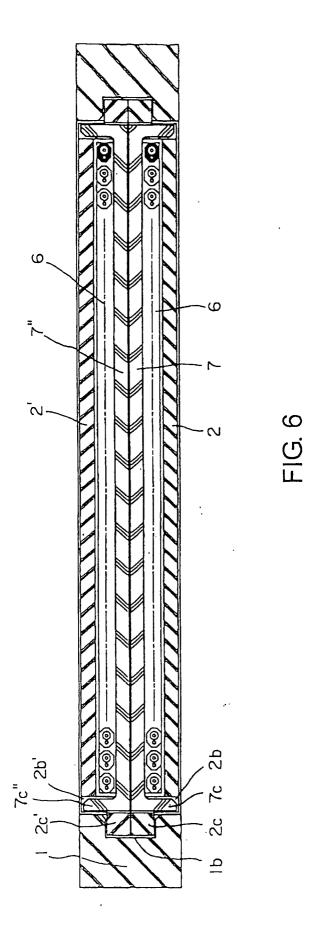

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/08363

A. CLASSIFICATION OF SUBJECT MATTER Int.Cl ⁷ H01R 23/66, 9/07					
According to International Patent Classification (IPC) or to both national classification and IPC					
B. FIELDS SEARCHED					
	ocumentation searched (classification system followed C1 H01R 23/66, 9/07, 23/68	by classification symbols)			
1110.	C1 110210 20, 00, 0, 01, 00, 00				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1926-1996 Toroku Jitsuyo Shinan Koho 1994-2001					
Kokai Jitsuyo Shinan Koho 1971-2001 Jitsuyo Shinan Toroku Koho 1996-2001					
Electronic d	ata base consulted during the international search (nam	ne of data base and, where practicable, sea	rch terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT					
Category*	Citation of document, with indication, where an	anropriate of the relevant passages	Relevant to claim No.		
Category	EP 1003245 A1 (JAPAN AVIATION		Relevant to claim No.		
	LIMITED, NEC CORPORATION),				
х	24 May, 2000 (24.05.00), Full text; Figs. 1 to 10		1,4-6		
Y	Full text; Figs. 1 to 10		2,3		
A	Full text; Figs. 1 to 10 & US 6165007 A & JP 2000-	150030 A	7,8,10,11		
	US 4415216 A1 (Yhomas & Betts (15 November, 1983 (15.11.83),	Corporation),			
Y	Full text; Figs. 1 to 6		2		
A	Full text; Figs. 1 to 6 & DE 82005718 U & JP 57-15	7472 7	1,3-8,10,11		
	& DE 82005/18 0	/4/2 A			
	JP 2000-223189 A (Ryosei Denso	K.K.),			
Y	11 August, 2000 (11.08.00), Full text; Figs. 1 to 15		3		
A	Full text; Figs. 1 to 15		1,2,4-8,10,11		
	(Family: none)				
D Euroba	a documents are listed in the continuation of Poy C	Saa matant family annay			
Further documents are listed in the continuation of Box C. See patent family annex. * Special categories of cited documents: "T" later document published after the inte		mational filing date or			
"A" docume	tategories or the documents. Int defining the general state of the art which is not red to be of particular relevance.	priority date and not in conflict with th	e application but cited to		
"E" earlier o	document but published on or after the international filing	understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be			
	nt which may throw doubts on priority claim(s) or which is	considered novel or cannot be considered to involve an inventive step when the document is taken alone			
cited to establish the publication date of another citation or other special reason (as specified)		"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is			
means	ent referring to an oral disclosure, use, exhibition or other	combined with one or more other such combination being obvious to a person	skilled in the art		
"P" document published prior to the international filing date but later "&" document member of than the priority date claimed					
	ctual completion of the international search	Date of mailing of the international search			
02 November, 2001 (02.11.01) 13 November, 2001 (13.11.01)					
Name and mailing address of the ISA/		Authorized officer			
Japanese Patent Office					
Facsimile No.		Telephone No.			

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/08363

			F01/00303
C (Continua	tion). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages		Relevant to claim No.
А	EP 1041682 A1 (JAPAN AVIATION ELECTRONIC LIMITE, NEC CORPORATIOND), 04 October, 2000 (04.10.00), Full text; Figs. 1 to 14 & US 6217344 B & JP 2000-277190 A	CSINDUSTRY,	1-11
А	JP 3-8277 A (Hirose Denki K.K., NEC Corpora 16 January, 1991 (16.01.91), Full text; Figs. 1 to 20 (Family: none)	tion),	1-11

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/08363

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)
This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:
Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:
2. Claims Nos.: 9 because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically: "An add-on flat cable" and "an add-on contact" described in claim 9 are not found in the description nor in the drawings, therefore a general concept of a connector described in claim 9 is absolutely beyond our recognition.
3. Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).
Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)
This International Searching Authority found multiple inventions in this international application, as follows:
As all required additional search fees were timely paid by the applicant, this international search report covers all searchable
As an required additional search fees were finitely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
Remark on Protest The additional search fees were accompanied by the applicant's protest. No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet (1)) (July 1992)