

(19)



(11)

EP 1 444 374 B9

(12)

CORRECTED NEW EUROPEAN PATENT SPECIFICATION

(15) Correction information:

Corrected version no 1 (W1 B2)
Corrections, see
Description Paragraph(s) 169

(51) Int Cl.:

C22C 38/00 *(2006.01)* **C21D 8/00** *(2006.01)*

(86) International application number:

PCT/JP2002/010386

(48) Corrigendum issued on:

18.02.2015 Bulletin 2015/08

(87) International publication number:

WO 2003/031669 (17.04.2003 Gazette 2003/16)

(45) Date of publication and mention
of the opposition decision:

26.09.2012 Bulletin 2012/39

(45) Mention of the grant of the patent:

09.01.2008 Bulletin 2008/02

(21) Application number: **02800781.3**

(22) Date of filing: **04.10.2002**

(54) **HIGH-STRENGTH THIN STEEL SHEET DRAWABLE AND EXCELLENT IN SHAPE FIXATION
PROPERTY AND METHOD OF PRODUCING THE SAME**

ZIEHBARES HOCHFESTES DÜNNES STAHLBLECH MIT HERVORRAGENDER
FORMFIXIERUNGSEIGENSCHAFT UND HERSTELLUNGSVERFAHREN DAFÜR

TOLE D'ACIER MINCE HAUTEMENT RESISTANTE POUVANT ETRE EMBOUTIE ET PRESENTANT
D'EXCELLENTE PROPRIETES DE MEMOIRE DE FORME ET PROCEDE DE PRODUCTION
ASSOCIE

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**

(30) Priority: **04.10.2001 JP 2001308285**

26.11.2001 JP 2001360084

(43) Date of publication of application:

11.08.2004 Bulletin 2004/33

(73) Proprietor: **Nippon Steel Corporation**

Tokyo 100-8071 (JP)

(72) Inventors:

- **YOKOI, Tatsuo**
c/o NIPPON STEEL CORPORATION OITA
WORKS
Oita-shi, Oita 870-8566 (JP)
- **HAYASHIDA, Teruki.**
c/o NIPPON STEEL CORP. OITA WORKS
Oita-shi, Oita 870-8566 (JP)
- **SUGIURA Natsuko**
c/o NIPPON STEEL CORP.
Futtsu-shi, Chiba 293-8511 (JP)

• **NAKAMURA, Takaaki**

c/o NIPPON STEEL CORP. OITA Works
Oita-shi, Oita 870-8566 (JP)

• **NAKAMOTO, Takehiro**

c/o NIPPON STEEL CORP. OITA WORKS
Oita-shi, Oita 870-8566 (JP)

(74) Representative: **Vossius & Partner**

**Siebertstrasse 3
81675 München (DE)**

(56) References cited:

EP-A- 1 026 278 EP-A- 1 201 780
EP-A- 1 362 930 WO-A-97/39152
DE-A1- 3 007 560 DE-A1- 3 401 406
FR-A- 2 477 178 US-A- 4 572 748

- **PATENT ABSTRACTS OF JAPAN** vol. 1996, no.
05, 31 May 1996 (1996-05-31) -& JP 08 003679 A
(NIPPON STEEL CORP), 9 January 1996
(1996-01-09)
- **R.D.K. Misra and J. P. Anderson**, "Transformation
textures in new ultrahigh strength hot rolled
microalloyed steel", **Materials Science and
Technology**, Jan. 2001, Vol. 17, pages 116 - 118

EP 1 444 374 B9

Description

[0001] The present invention relates to a high-strength thin steel sheet drawable and excellent in a shape fixation property, and a method of producing the steel sheet. By this invention, it is particularly possible to obtain a good drawability even with a steel sheet having a texture disadvantageous for drawing work.

[0002] The application of aluminum alloys and other light metals and high-strength steel sheets to automobile members has expanded recently for the purpose of reducing automobile weight and thereby reducing fuel consumption and other related advantages. However, while light metals such as aluminum alloys have an advantage of high specific strength, their application is limited to special uses because they are far more costly than steel. To further reduce automobile weight, therefore, a wider application of low cost, high-strength steel sheets is strongly required.

[0003] However, when bending deformation is applied to a work piece of a high-strength steel sheet, because of the high strength, its shape after the work tends to deviate from the shape of the forming jig and return to the original shape. The phenomenon of the shape after working of a work piece returning to the original shape is called spring back. When spring back occurs, an envisaged shape is not obtained in a work piece. For this reason, high-strength steel sheets used for conventional automobile bodies have mostly been limited to those having a strength up to 440 MPa.

[0004] Although it is necessary to further reduce the weight of a car body by the use of a high-strength steel sheet having a high strength of 490 MPa or more, a high-strength steel sheet showing small spring back and having a good shape fixation property has not been made available to date. Needless to say, to enhance the shape fixation property after the working of a high-strength steel sheet having a strength up to 440 MPa or a sheet of a mild steel is extremely important for improving the shape accuracy of products such as automobiles and electric home appliances.

[0005] Japanese Unexamined Patent Publication No. H10-72644 discloses a cold-rolled austenitic stainless steel sheet having a small amount of spring back (referred to as dimensional accuracy in the present invention) characterized in that the convergence of a {200} texture in a plane parallel to the rolled surfaces is 1.5 or more. However, the publication does not include any description related to a technology of reducing the phenomena of the spring back and/or the wall warping of a ferritic steel sheet.

[0006] Besides the above, as a technology for reducing the amount of spring back of a ferritic stainless steel sheet, Japanese Unexamined Patent Publication No. 2001-32050 discloses an invention wherein the reflected x-ray strength ratio of a {100} plane parallel to the sheet surfaces is controlled to 2 or more in the texture at the center of the sheet thickness. However, the invention neither refers to the reduction of wall warping nor includes any specification regarding the orientation component group of {100}<011> to {223}<110> and the orientation component {112}<110>, which is an important orientation component for reducing the wall warping.

[0007] Further, WO No. 00/06791 discloses a ferritic thin steel sheet wherein the ratio of reflected X-ray strength of a {100} plane to that of a {111} plane is controlled to 1 or more for the purpose of improving the shape fixation property. However, unlike the present invention, this invention does not refer to the ratios of the X-ray strength in the orientation component group of {100}<011> to {223}<110> to the random X-ray diffraction strength and those in the orientation components of {554}<225>, {111}<112> and {111}<110> to the random X-ray diffraction strength, and, in addition, there is no disclosure on the technology of improving drawability.

[0008] Japanese Unexamined Patent Publication No. 2001-64750 discloses a cold-rolled steel sheet wherein, as a technology for reducing the amount of spring back, the reflected X-ray strength ratio of a {100} plane parallel to sheet surfaces is controlled to 3 or more. However, this invention is characterized by specifying the reflected X-ray strength ratio of a {100} plane on a very surface of a steel sheet, and the position of X-ray measurement is different from the position specified in the present invention, where the average X-ray strength ratio in the orientation component group of {100}<011> to {223}<110> is measured at the center of the thickness of a steel sheet. Besides, this invention neither refers to the orientation components of {554}<225>, {111}<112> and {111}<110>, nor discloses any technology of improving drawability.

[0009] Further, as a steel sheet excellent in a shape fixation property, Japanese Unexamined Patent Publication No. 2000-297349 discloses a hot-rolled steel sheet wherein the absolute value of the in-plane anisotropy of r-value Δr is controlled to 0.2 or less. However, this invention is characterized by improving a shape fixation property by lowering a yield ratio, and it does not include any description regarding the control of a texture aiming at improving a shape fixation property based on the philosophy described in the present invention.

[0010] In such a situation, the present invention relates to a high-strength thin steel sheet drawable and excellent in a shape fixation property for obtaining a good drawability even with a steel sheet having a texture disadvantageous for drawing work, and a method of producing the same. In other words, the object of the present invention is to provide a high-strength thin steel sheet excellent in a shape fixation property and drawability, and a method of producing said steel sheet economically and stably.

[0011] The inventors of the present invention, in consideration of the production processes of high-strength thin steel sheets presently produced on an industrial scale using generally employed production facilities, earnestly studied how to obtain a high-strength thin steel sheet having both a good shape fixation property and a high drawability simultaneously.

[0012] As a result, the present invention has been established based on a new discovery that the following conditions are very effective for securing both a good shape fixation property and a high drawability at the same time: at least on a plane at the center of the thickness of a steel sheet, the average ratio of the X-ray strength in the orientation component group of $\{100\}\langle 011 \rangle$ to $\{223\}\langle 110 \rangle$ to random X-ray diffraction strength is 3.0 or more and the average ratio of the X-ray strength in the three orientation components of $\{554\}\langle 225 \rangle$, $\{111\}\langle 112 \rangle$ and $\{111\}\langle 110 \rangle$ to random X-ray diffraction strength is 3.5 or less; a composition having a lubricating effect is Applied to a steel sheet wherein an arithmetic average of roughness Ra of at least one of the surfaces is 1 to 3.5 μm ; and the friction coefficient of the steel sheet surfaces at 0 to 200°C is 0.05 to 0.2.

[0013] The present invention is defined by the features of the claims.

Fig. 1 is a schematic illustration showing the sectional shape of a sample having undergone a bending test.

Fig. 2 is an illustration explaining a friction coefficient-measuring apparatus.

[0014] The present invention according to the claims will be explained in detail.

[0015] For realizing an excellent shape fixation property, it is necessary that the average of the ratio of the X-ray strength in the orientation component group of $\{100\}\langle 011 \rangle$ to $\{223\}\langle 110 \rangle$ to random X-ray diffraction strength on a plane at the center of the thickness of a steel sheet be 3 or more. If it is below 3, the shape fixation property becomes poor.

[0016] Here, the average ratio of the X-ray strength in the orientation component group of $\{100\}\langle 011 \rangle$ to $\{223\}\langle 110 \rangle$ to random X-ray diffraction strength is obtained from the three-dimensional texture obtained by calculating the X-ray diffraction strengths in the principal orientation components included in the orientation component group, namely $\{100\}\langle 011 \rangle$, $\{116\}\langle 110 \rangle$, $\{114\}\langle 110 \rangle$, $\{113\}\langle 110 \rangle$, $\{112\}\langle 110 \rangle$, $\{335\}\langle 110 \rangle$ and $\{223\}\langle 110 \rangle$, either by the vector method based on the pole figure of $\{110\}$, or by the series expansion method using two or more (desirably, three or more) pole figures out of the pole figures of $\{110\}$, $\{100\}$, $\{211\}$ and $\{310\}$.

[0017] For example, as the ratio of the X-ray strength in the above crystal orientation components to random X-ray diffraction strength calculated by the latter method, the strengths of $(001)[1-10]$, $(116)[1-10]$, $(114)[1-10]$, $(113)[1-10]$, $(112)[1-10]$, $(335)[1-10]$ and $(223)[1-10]$ at a $\phi 2 = 45^\circ$ cross section in a three-dimensional texture can be used without modification. Note that the average ratio of the X-ray strength in the orientation component group of $\{100\}\langle 011 \rangle$ to $\{223\}\langle 110 \rangle$ to random X-ray diffraction strength is the arithmetic average ratio of all the above orientation components. When it is impossible to obtain the strengths in all these orientation components, the arithmetic average of the strengths in the orientation components of $\{100\}\langle 011 \rangle$, $\{116\}\langle 110 \rangle$, $\{114\}\langle 110 \rangle$, $\{112\}\langle 110 \rangle$ and $\{223\}\langle 110 \rangle$ may be used as a substitute.

[0018] In addition to the above, it is necessary that the average ratio of the X-ray strength in the following three orientation components, namely $\{554\}\langle 225 \rangle$, $\{111\}\langle 112 \rangle$ and $\{111\}\langle 110 \rangle$, to random X-ray diffraction strength be below 2.5. When it is not below 2.5, even if the average ratio of the X-ray strength in the orientation component group of $\{100\}\langle 011 \rangle$ to $\{223\}\langle 110 \rangle$ to random X-ray diffraction strength is within the appropriate range, a good shape fixation property is not obtained. Here, the average ratio of the X-ray strength in the three orientation components of $\{554\}\langle 225 \rangle$, $\{111\}\langle 112 \rangle$ and $\{111\}\langle 110 \rangle$ to random X-ray diffraction strength can be calculated from the three-dimensional texture obtained in the same manner as explained above. It is preferable in the present invention that the average ratio of the X-ray strength in the orientation component group of $\{100\}\langle 011 \rangle$ to $\{223\}\langle 110 \rangle$ to random X-ray diffraction strength be 4 or more.

[0019] The reason why the X-ray strengths in the crystal orientation components are important for a shape fixation property in bending work is not altogether clear, but it is estimated that the sliding behavior of crystals during bending deformation has some connection.

[0020] A specimen for an X-ray diffraction measurement is prepared by cutting out a test piece 30 mm in diameter from a position of 1/4 or 3/4 of the width of a steel sheet, grinding the surfaces up to the three-triangle grade finish (the second finest finish) and, then, removing strain by chemical polishing or electrolytic polishing. Note that a crystal orientation component expressed as $\{hkl\}\langle uvw \rangle$ means that the direction of a normal to the plane of a steel sheet is parallel to $\langle hkl \rangle$ and the rolling direction of the steel sheet is parallel to $\langle uvw \rangle$. The measurement of a crystal orientation with X-ray is conducted, for example, in accordance with the method described in pages 274 to 296 of the Japanese translation of Elements of X-ray Diffraction by B. D. Cullity (published in 1986 from AGNE Gijutsu Center, translated by Gentaro Matsumura).

[0021] Next, the surface conditions of a steel sheet, which are important in the present invention for securing good drawability, are explained. In the present invention, the arithmetic average of roughness Ra of at least one of the surfaces of a steel sheet before the steel sheet is coated with a composition having a lubricating effect is determined to be from 1 to 3.5 μm . When the arithmetic average of roughness Ra is below 1 μm , it becomes difficult to retain on the steel sheet surface a composition having a lubricating effect to be applied later. When the arithmetic average of roughness Ra exceeds 3.5 μm , on the other hand, a sufficient lubricating effect cannot be obtained even after a composition having a lubricating effect is applied. For this reason, the arithmetic average of roughness Ra of at least one of the surfaces of

a steel sheet is determined to be from 1 to 3.5 μm . A preferable range is from 1 to 3 μm . Here, the arithmetic average of roughness R_a is an arithmetic average of roughness R_a specified in Japanese Industrial Standard (JIS) B 0601-1994.

[0022] In addition to the above, in the present invention, the friction coefficient of a steel sheet after the application of a composition having a lubricating effect is determined to be 0.05 to 0.2 at 0 to 200°C in the direction of rolling and/or in the direction perpendicular to the rolling direction. When a friction coefficient is below 0.05, even if blank holding force (BHF) is increased during press forming for improving a shape fixation property, a steel sheet is not held at its brim and the material flows into a die, deteriorating the shape fixation property. When a friction coefficient exceeds 0.2, on the other hand, the flow of a steel sheet into a die is decreased even if the BHF is lowered within a practical tolerance, probably leading to the deterioration of drawing workability. For this reason, the friction coefficient of at least one of the directions must be 0.05 to 0.2.

[0023] As for the temperature range in which the value of a friction coefficient is prescribed, if a friction coefficient is measured at below 0°C, an adequate evaluation is impossible because of frost and so on forming on a steel sheet surface. If the temperature is above 200°C, a composition having a lubricating effect applied to the surfaces of a steel sheet may become unstable. For this reason, the temperature range in which the value of a friction coefficient is prescribed is determined to be from 0 to 200°C.

[0024] Here, a friction coefficient is defined as the ratio (f/F) of a drawing force (f) to a pressing force (F) in the following test procedures: a composition having a lubricating effect is applied to the surfaces of a subject steel sheet to be evaluated; the steel sheet is placed between two flat plates having a Vickers hardness of Hv600 or more at the surfaces; a force (F) perpendicular to the surfaces of the subject steel sheet is imposed so that the contact stress is 1.5 to 2 kgf/mm²; and the force (f) required for pulling out the subject steel sheet from between the flat plates is measured.

[0025] Then, an index of drawability of a steel sheet is defined as the quotient (D/d) obtained by dividing the maximum diameter (D) in which drawing has been successful by the diameter (d) of a cylindrical punch when a steel sheet is formed into a disc-shape and subjected to drawing work using the cylindrical punch. In this test, steel sheets are formed into various disc-shapes 300 to 400 mm in diameter and a cylindrical punch 175 mm in diameter having a shoulder 10 mm in radius around the bottom face and a die having a shoulder 15 mm in radius are used in the evaluation of drawability.

[0026] The microstructure of a steel sheet according to the present invention is explained hereafter.

[0027] In the present invention, it is not necessary to specify the microstructure of a steel sheet for the purpose of improving a shape fixation property; the effect of the present invention on improving a shape fixation property is obtained as far as a texture falling within the range of the present invention (the ratios of the x-ray strength in specific orientation components to random X-ray diffraction strength within the ranges of the present invention) is obtained in the structures of ferrite, bainite, pearlite and/or martensite formed in commonly used steel materials. Further, stretch formability and other press forming properties can be enhanced, when a specific microstructure, for example, a compound structure containing retained austenite by 5 to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite, a compound structure containing ferrite as the phase accounting for the largest volume percentage and martensite mainly as the second phase, or the like, is formed.

[0028] Note that, when a structure which is not a bcc crystal structure, such as retained austenite, is included in a compound structure composed of two or more phases, such a compound structure does not pose any problem insofar as the ratios of the X-ray strength in the orientation components and orientation component groups to random X-ray diffraction strength converted by the volume percentage of the other structures are within the respective ranges of the present invention.

[0029] Besides, pearlite containing coarse carbides may act as a starting point of a fatigue crack, remarkably deteriorating fatigue strength, and, for this reason, it is desirable that the volume percentage of the pearlite containing coarse carbides be 15% or less. When yet better fatigue properties are required, it is desirable that the volume percentage of the pearlite containing coarse carbides be 5% or less.

[0030] Here, the volume percentage of ferrite, bainite, pearlite, martensite or retained austenite is defined as the area percentage in a microstructure at a position in the depth of 1/4 of the steel sheet thickness, obtained by: polishing a test piece, which is cut out from a position of 1/4 or 3/4 of the width of a steel sheet, along the section surface in the rolling direction; etching the section surface with nital reagent and/or the reagent disclosed in Japanese Unexamined Patent Publication No. H5-163590; and then observing the etched surface with a light-optical microscope under a magnification of 200 to 500. Since it is sometimes difficult to identify retained austenite by the etching with the above reagents, the volume percentage may be calculated in the following manner.

[0031] Because the crystal structure of austenite is different from that of ferrite, they can be easily distinguished crystallographically. Therefore, the volume percentage of retained austenite can be obtained by the X-ray diffraction method too, namely by the simplified method of calculating the volume percentage by the following equation based on the difference between austenite and ferrite in the reflection intensity of their lattice planes using the $K\alpha$ ray of Mo:

$$V_{\gamma} = (2/3)\{100/(0.7 \times \alpha(211)/\gamma(220) + 1)\} + (1/3)\{100/(0.78 \times \alpha(211)/\gamma(311) + 1)\},$$

5

where, $\alpha(211)$, $\gamma(220)$ and $\gamma(311)$ are the X-ray reflection intensity values of the indicated lattice planes of ferrite (α) and austenite (γ), respectively.

10 **[0032]** In order to obtain a low yield ratio for realizing a better shape fixation property than the once improved shape fixation property in the present invention, it is necessary that the microstructure of a steel sheet is a compound structure containing ferrite as the phase accounting for the largest volume percentage and martensite mainly as the second phase. Here, the present invention allows containing unavoidably included bainite, retained austenite and pearlite if their total percentage is below 5%. Note that, for securing a low yield ratio of 70% or less, it is desirable that the volume percentage of ferrite be 50% or more.

15 **[0033]** In order to obtain a good ductility, in addition to improving a shape fixation property, in the present invention, it is necessary that the microstructure of a steel sheet is a compound structure containing retained austenite by 5% to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite. Here, the present invention allows containing unavoidably included martensite and pearlite if their total percentage is below 5%.

20 **[0034]** Further, in order to obtain a good burring workability, in addition to improving a shape fixation property, in the present invention, it is necessary that the microstructure of a steel sheet is a compound structure containing bainite or ferrite and bainite as the phase accounting for the largest volume percentage. Here, the present invention allows containing unavoidably included martensite, retained austenite and pearlite. In order to obtain a good burring workability (a hole expansion ratio), it is desirable that the total volume percentage of hard retained austenite and martensite be below 5%. It is also desirable that the volume percentage of bainite be 30% or more. Further, for realizing a good ductility, it is desirable that the volume percentage of bainite be 70% or less.

25 **[0035]** In order to obtain a better burring workability, in addition to improving a shape fixation property, in the present invention, it is desirable that the microstructure of a steel sheet consists of a single phase of ferrite for securing a good burring workability (a hole expansibility). Here, the present invention allows some amount of bainite to be contained as occasion demands. Further, in order to secure a yet better burring workability, it is desirable that the volume percentage of bainite be 10% or less. Here, the present invention allows containing unavoidably included martensite, retained austenite and pearlite. The ferrite mentioned here includes bainitic ferrite and acicular ferrite structures. Further, in order to secure good fatigue properties, it is desirable that the volume percentage of pearlite containing coarse carbides be 5% or less. Additionally, in order to secure a good burring workability (a hole expansibility), it is desirable that the total volume percentage of retained austenite and martensite be below 5%.

35 **[0036]** Next, the reasons why the chemical components are limited in the present invention are explained.

[0037] The present invention according to the claims is explained in detail.

40 **[0038]** C is an indispensable element for obtaining a desired microstructure. When C content exceeds 0.3%, however, workability is deteriorated and, for this reason, the content is set at 0.3% or less. Additionally, when C content exceeds 0.2%, weldability is deteriorated and, for this reason, it is desirable that the content be 0.2% or less. On the other hand, when the content of C is below 0.01%, steel strength decreases and, therefore, the content is set at 0.01% or more. Further, in order to obtain retained austenite stably in an amount sufficient for realizing a good ductility, it is desirable that the content be 0.05% or more.

45 **[0039]** In addition, when the content of C exceeds 0.1%, workability and weldability are deteriorated, and, therefore, the content is set at 0.1% or less. When the content is below 0.01%, steel strength is lowered and, for this reason, its content is set at 0.01% or more.

[0040] Si is a solute strengthening element and, as such, it is effective for enhancing strength. Its content has to be 0.01% or more for obtaining a desired strength but, when it is contained in excess of 2%, workability is deteriorated. The Si content, therefore, is determined to be from 0.01 to 2%.

50 **[0041]** Mn is a solute strengthening element and, as such, it is effective for enhancing strength. Its content has to be 0.05% or more for obtaining a desired strength. In the case where elements such as Ti, which suppress the occurrence of hot cracking induced by S, are not added in a sufficient amount in addition to Mn, it is desirable to add Mn so that the expression $Mn/S \geq 20$ is satisfied in terms of mass percentage. Further, Mn is an element to stabilize austenite and, therefore, in order to stably obtain a sufficient amount of retained austenite for realizing a good ductility, it is desirable that its addition amount be 0.1% or more. When Mn is added in excess of 3%, on the other hand, cracks occur to slabs. Thus, the content is set at 3% or less.

[0042] P is an undesirable impurity, and the lower its content the better. When the content exceeds 0.1%, workability and weldability are adversely affected, and so are fatigue properties. Therefore, P content is set at 0.1% or less.

[0043] S causes cracks to occur during hot rolling when contained too much and, therefore, the content must be

controlled as low as possible, but the content up to 0.03% is permissible. S is also an impurity and the lower its content the better. When S content is too large, the A type inclusions detrimental to local ductility and burring workability are formed and, for this reason, the content has to be minimized. A desirable content of S is, therefore, 0.01% or less.

[0044] Al is required to be added by 0.005% or more for deoxidizing molten steel, but its upper limit is set at 1.0% for avoiding cost increase. Al increases the formation of non-metallic inclusions and deteriorates elongation when added excessively and, for this reason, a desirable content of Al is 0.5% or less.

[0045] N combines with Ti and Nb and forms precipitates at a temperature higher than C does, and, by so doing, decreases the amounts of Ti and Nb which are effective for fixing C. For this reason, N content must be minimized. A permissible content of N is 0.005% or less.

[0046] Ti contributes to the increase of the strength of a steel sheet through precipitation strengthening. When the content is below 0.05%, however, the effect is insufficient and, when the content exceeds 0.5%, not only the effect is saturated but also the cost of alloy addition is increased. For this reason, the content of Ti is determined to be from 0.05 to 0.5%.

[0047] In addition, Ti is one of the most important elements in the present invention. That is, in order to precipitate and fix C, which forms carbides such as cementite detrimental to burring workability, and thereby contribute to the improvement of burring workability, it is necessary that the condition, $Ti - (48/12)C - (48/14)N - (48/32)S \geq 0\%$, be satisfied.

[0048] Here, since S and N combine with Ti to form precipitates at a temperature comparatively higher than C does, in order to satisfy the expression $Ti \geq 48/12C$, the condition, $Ti - (48/12)C - (48/14)N - (48/32)S \geq 0\%$, must be satisfied inevitably.

[0049] Nb contributes to the improvement of the strength of a steel sheet through precipitation strengthening, like Ti does. It also has an effect to improve burring workability by making crystal grains fine. When the content is below 0.01%, however, the effects do not show up sufficiently and, if the content exceeds 0.5%, not only the effects are saturated but also the cost of alloy addition is increased. For this reason, the content of Nb is determined to be from 0.01 to 0.5%.

[0050] In order to precipitate and fix C, which forms carbides such as cementite detrimental to burring workability, and thereby contribute to the improvement of burring workability, it is necessary that the condition, $Ti + (48/93)Nb - (48/12)C - (48/14)N - (48/32)S \geq 0\%$, be satisfied.

[0051] Here, since Nb forms carbides at a temperature comparatively lower than Ti does, in order to satisfy the expression $Ti + 48/93Nb \geq 48/12C$, the condition, $Ti + (48/93)Nb - (48/12)C - (48/14)N - (48/32)S \geq 0\%$, must be satisfied inevitably.

[0052] Cu is added as occasion demands, since it has an effect to improve fatigue properties when it is in the state of solid solution. However, a tangible effect is not obtained when the addition amount is below 0.2%, but the effect is saturated when the content exceeds 2%. Thus, the range of the Cu content is determined to be from 0.2 to 2%. It has to be noted that, when the coiling temperature is 450°C or higher, if Cu is contained in excess of 1.2%, it may precipitate after coiling, drastically deteriorating workability. For this reason, it is desirable that the content of Cu be limited to 1.2% or less.

[0053] B is added as occasion demands, since it has an effect to raise fatigue limit when added in combination with Cu. Further B is added as occasion demands, since it has an effect to raise fatigue limit by suppressing the intergranular embrittlement caused by P, which is considered to result from a decrease in the amount of solute C. An addition of B by below 0.0002% is not enough for obtaining the effects but, when B is added in excess of 0.002%, cracks occur to a slab. For this reason, the addition amount of B is determined to be from 0.0002 to 0.002%.

[0054] Ni is added as occasion demands for preventing hot shortness caused by containing Cu. An addition amount of below 0.1% is not enough for obtaining the effect but, when Ni is added in excess of 1%, the effect is saturated. For this reason, the content is determined to be from 0.1 to 1%. Note that, when the content of Cu is 1.2% or less, it is desirable that the content of Ni be 0.6% or less.

[0055] Ca and REM are elements to modify the shape of non-metallic inclusions, which serve as starting points of fractures and/or deteriorate workability, and to render them harmless. But a tangible effect is not obtained when either of them is added by below 0.0005%. When Ca is added in excess of 0.002% or REM in excess of 0.02%, the effect is saturated. Thus, it is desirable to add Ca by 0.0005 to 0.002% and REM by 0.0005 to 0.02%.

[0056] Additionally, one or more of precipitation strengthening elements and solute strengthening elements, namely Mo, V, Cr and Zr, may be added for enhancing strength. However, when they are added by below 0.05%, 0.02%, 0.01% and 0.02%, respectively, no tangible effects show up and, when they are added in excess of 1%, 0.2%, 1% and 0.2%, respectively, the effects are saturated.

[0057] Sn, Co, Zn, W and/or Mg may be added by 1% or less in total to a steel mainly consisting of the components explained above, but, since Sn may cause surface defects during hot rolling, it is preferable to limit the content of Sn to 0.05% or less.

[0058] Now, the reasons for limiting the conditions of the production method according to the present invention are hereafter described in detail.

[0059] A steel sheet according to the present invention can be produced through the processes of: casting; hot rolling

and cooling, or hot rolling, cooling, pickling and cold rolling; then, heat treatment or heat treatment of a hot-rolled or cold-rolled steel sheet in a hot dip plating line; and further surface treatment applied to a steel sheet thus produced separately as occasion demands.

[0060] The-present invention does not particularly specify the production methods prior to hot rolling. That is: a steel may be melted and refined by a blast furnace, an electric arc furnace or the like; then the chemical components may be adjusted so as to contain desired amounts of the components in one or more of various secondary refining processes; and then the steel may be cast into a slab through a casting process such as an ordinary continuous casting process, an ingot casting process and a thin slab casting process. Steel scraps may be used as a raw material. Further, in the case of a slab cast through a continuous casting process, the slab may be fed to a hot-rolling mill directly while it is hot, or after cooling it to the room temperature and then heating it in a reheating furnace.

[0061] No specific limit is particularly set to the temperature of reheating, but it is desirable that a reheating temperature be below 1,400°C since, when it is 1,400°C or higher, the amount of scale off becomes large and the product yield is lowered. It is also desirable that a reheating temperature be 1,000°C or higher since a reheating temperature of below 1,000°C remarkably lowers the operation efficiency of the mill in the rolling schedule.

[0062] It is desirable that a reheating temperature be 1,100°C or higher, because, when the reheating temperature is below 1,100°C, not only precipitates containing Ti and/or Nb coarsen without remelting in a slab and thus their precipitation strengthening capacity is lost, but also precipitates containing Ti and/or Nb having a size and a distribution desirable for improving burring workability do not precipitate.

[0063] In a hot rolling process, a slab undergoes finish rolling after completing rough rolling. When descaling is applied after completing rough rolling, it is desirable that the following condition be satisfied:

$$P \text{ (MPa)} \times L \text{ (1/cm}^2\text{)} \geq 0.0025,$$

where P (MPa) is an impact pressure of high-pressure water on a steel sheet surface, and L (1/cm²) is a flow rate of descaling water.

[0064] An impact pressure P of high-pressure water on a steel sheet surface is expressed as follows (see Tetsu-to-Hagane, 1991, Vol. 77, No. 9, p.1450):

$$P \text{ (MPa)} = 5.64 \times P_0 \times V \times H^2,$$

where, P₀ (MPa) is a pressure of liquid, V (1/min.) is a liquid flow rate of a nozzle, and H (cm) is a distance between a nozzle and the surface of a steel sheet.

[0065] The flow rate L (1/cm²) is expressed as follows:

$$L \text{ (1/cm}^2\text{)} = V / (W \times v)$$

where, V (1/min.) is a liquid flow rate of a nozzle, W (cm) is the width where the liquid blown from a nozzle hits a steel sheet surface, and v (cm/min.) is a travelling speed of a steel sheet.

[0066] For obtaining the effects of the present invention, it is not necessary to particularly set an upper limit to the product of the impact pressure P and the flow rate L, but it is preferable that the product be 0.02 or less because, when the liquid flow rate of a nozzle is raised, troubles such as the increased wear of the nozzle occur.

[0067] It is preferable, further, that the maximum roughness height R_y of a steel sheet after finish rolling be 15 μm (we define as 15 μmR_y, this is a result when the standard length l is 2.5 mm and the length of evaluation l_n is 12.5 mm applied to the method described in p5 - p7 of JIS B 0601-1994.) or less. The reason for this is clear from the fact that the fatigue strength of a steel sheet as hot-rolled or as pickled correlates with the maximum roughness height R_y of the steel sheet surface, as stated in page 84 of Metal Material Fatigue Design Handbook edited by the Society of Materials Science, Japan, for example. Further, it is preferable that the finish hot rolling be done within 5 sec. after high pressure descaling, in order to prevent scales from forming again.

[0068] In addition, in order to realize an effect to lower a friction coefficient by applying a composition having a lubricating effect, it is desirable that the arithmetic average of roughness R_a of the surface of a steel sheet after finish rolling be 3.5 or less, unless the steel sheet is subjected to skin pass rolling or cold rolling after hot rolling or pickling.

[0069] Besides the above, the finish rolling may be conducted continuously by welding sheet bars together after rough

rolling or the subsequent descaling. In this case, the rough-rolled sheet bars may be welded together after being coiled temporarily, held inside a cover having a heat retention function, as occasion demands, and then uncoiled.

[0070] When a hot-rolled steel sheet is used as a final product, it is necessary that the finish rolling be done at a total reduction ratio of 25% or more in the temperature range of the Ar_3 transformation temperature + 100°C or lower during the latter half of the finish rolling. Here, the Ar_3 transformation temperature can be expressed in relation to the steel chemical components, in a simplified manner, by the following equation, for instance:

$$Ar_3 = 910 - 310 \times \%C + 25 \times \%Si - 80 \times \%Mn.$$

[0071] When the total reduction ratio in the temperature range of the Ar_3 transformation temperature + 100°C or lower is less than 25%, the rolled austenite texture does not develop sufficiently and, as a result, the effects of the present invention are not obtained, no matter how the steel sheet is cooled thereafter. For obtaining a sharper texture, it is desirable that the total reduction ratio in the temperature range of the Ar_3 transformation temperature + 100°C or lower be 35% or more.

[0072] The present invention does not particularly specify a lower limit of the temperature range when the rolling of a total reduction ratio of 25% or more is carried out. However, when the rolling is done at a temperature below the Ar_3 transformation temperature, a work-induced structure remains in ferrite having precipitated during the rolling, and, as a result, ductility is lowered and workability is deteriorated. For this reason, it is desirable that the lower limit of the temperature range when the rolling of a total reduction ratio of 25% or more is carried out be equal to or higher than the Ar_3 transformation temperature. However, if recovery or recrystallization is to be advanced to some extent during the subsequent coiling process or a heat treatment after the coiling process, a temperature below the Ar_3 transformation temperature is acceptable.

[0073] The present invention does not particularly specify an upper limit of the total reduction ratio in the temperature range of the Ar_3 transformation temperature + 100°C or lower. However, when the total reduction ratio exceeds 97.5%, the rolling load becomes too high and it becomes necessary to increase the rigidity of the mill excessively, resulting in economical disadvantage. For this reason, the total reduction ratio is, desirably, 97.5% or less.

[0074] Here, when the friction between a hot-rolling roll and a steel sheet is large during hot rolling in the temperature range of the Ar_3 transformation temperature + 100°C or lower, crystal orientations mainly composed of {110} develop at planes near the surfaces of a steel sheet, causing the deterioration of a shape fixation property. As a countermeasure, lubrication is applied, as occasion demands, for reducing the friction between a hot-rolling roll and a steel sheet.

[0075] The present invention does not particularly specify an upper limit of the friction coefficient between a hot-rolling roll and a steel sheet. However, when it exceeds 0.2, crystal orientations mainly composed of {110} develop conspicuously, deteriorating a shape fixation property. For this reason, it is desirable to control the friction coefficient between a hot-rolling roll and a steel sheet to 0.2 or less at least at one of the passes of the hot rolling in the temperature range of the Ar_3 transformation temperature + 100°C or lower. It is preferable yet to control the friction coefficient between a hot-rolling roll and a steel sheet to 0.15 or less at all the passes of the hot rolling in the temperature range of the Ar_3 transformation temperature + 100°C or lower. Here, the friction coefficient between a hot-rolling roll and a steel sheet is the value calculated from a forward slip ratio, a rolling load, a rolling torque and so on based on the rolling theory.

[0076] According to the present invention it is necessary that the temperature at the final pass (FT) of a finish rolling be equal to or above the Ar_3 transformation temperature. This is because, if the rolling temperature falls below the Ar_3 transformation temperature during hot rolling, a work-induced structure remains in ferrite having precipitated before or during the rolling, and, as a result, ductility is lowered and workability is deteriorated. However, when a heat treatment for recovery or recrystallization is to be applied during or after the subsequent coiling process, the temperature at the final pass (FT) of the finish rolling is allowed to be below the Ar_3 transformation temperature.

[0077] The present invention does not particularly specify an upper limit of a finishing temperature, but, if a finishing temperature exceeds the Ar_3 transformation temperature + 100°C, it becomes substantially impossible to carry out rolling at a total reduction ratio of 25% or more in the temperature range of the Ar_3 transformation temperature + 100°C or lower. For this reason, it is desirable that the upper limit of a finishing temperature be the Ar_3 transformation temperature + 100°C or lower.

[0078] In the present invention, it is not necessary to particularly specify the microstructure of a steel sheet for the purpose of improving a shape fixation property and, thus, no specific limitation is set forth regarding the cooling process after the completion of finish rolling until the coiling at a prescribed coiling temperature. Nevertheless, a steel sheet is cooled, as occasion demands; for the purpose of securing a prescribed coiling temperature or controlling a microstructure.

[0079] The present invention does not particularly specify an upper limit of a cooling rate, but, since thermal strain may cause the warping of a steel sheet, it is desirable to control the cooling rate to 300°C/sec. or less. In addition, when a cooling rate is too high, it becomes impossible to accurately control the cooling end temperature and an over-cooling

may happen as a result of overshooting to a temperature below a prescribed coiling temperature. For this reason, the cooling rate here is, desirably, 150°C/sec. or less. No lower limit of the cooling rate is set forth specifically, either. For reference, the cooling rate in the case where a steel sheet is left to cool naturally in room temperature without any intentional cooling is 5°C/sec. or more.

[0080] In order to obtain a low yield ratio for realizing a better shape fixation property than the once improved shape fixation property in the present invention, it is necessary that the microstructure of a steel sheet is a compound structure containing ferrite as the phase accounting for the largest volume percentage and martensite mainly as the second phase.

[0081] To do so, a hot-rolled steel sheet has to be retained for 1 to 20 sec. in the temperature range from the Ar_3 transformation temperature to the Ar_1 transformation temperature (the ferrite-austenite two-phase zone) in the first place after completing finish rolling. Here, the retention of a hot-rolled steel sheet is carried out for accelerating ferrite transformation in the two-phase zone. If the retention time is less than 1 sec., the ferrite transformation in the two-phase zone is insufficient, and a sufficient ductility is not obtained, but, if it exceeds 20 sec., pearlite forms and the envisaged compound structure containing ferrite as the phase accounting for the largest volume percentage and martensite mainly as the second phase is not obtained.

[0082] In addition, in order to easily accelerate the ferrite transformation, it is desirable that the temperature range in which a steel sheet is retained for 1 to 20 sec. be from the Ar_1 transformation temperature to 800°C. Further, in order not to lower productivity drastically, it is desirable that the retention time, which has been defined earlier as from 1 to 20 sec., be 1 to 10 sec.

[0083] For satisfying all these conditions, it is necessary to reach the temperature range rapidly at a cooling rate of 20°C/sec. or more after completing finish rolling. The upper limit of a cooling rate is not particularly specified, but, in consideration of the capacity of cooling equipment, a reasonable cooling rate is 300°C/sec. or less. In addition, when a cooling rate is too high, it becomes impossible to accurately control the cooling end temperature and over-cooling may happen as a result of overshooting to the Ar_1 transformation temperature or below. For this reason, the cooling rate here is, desirably, 150°C/sec. or less.

[0084] Subsequently, a steel sheet is cooled at a cooling rate of 20°C/sec. or more from the above temperature range to a coiling temperature (CT). At a cooling rate below 20°C/sec., pearlite or bainite forms and a sufficient amount of martensite is not obtained and, as a result, the envisaged microstructure containing ferrite as the phase accounting for the largest volume percentage and martensite as the second phase is not obtained. The effects of the present invention can be enjoyed without bothering to particularly specify an upper limit of the cooling rate down to the coiling temperature but, for avoiding warping caused by thermal strain, it is preferable to control the cooling rate to 300°C/sec. or less.

[0085] In order to obtain a good ductility, in addition to improving the shape fixation property, in the present invention, it is necessary that the microstructure of a steel sheet is a compound structure containing retained austenite by 5% to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite. To do so, a hot-rolled steel sheet has to be retained for 1 to 20 sec. in the temperature range from the Ar_3 transformation temperature to the Ar_1 transformation temperature (the ferrite-austenite two-phase zone) in the first place after completing finish rolling. Here, the retention of a hot-rolled steel sheet is carried out for accelerating ferrite transformation in the two-phase zone. If the retention time is less than 1 sec., the ferrite transformation in the two-phase zone is insufficient and a sufficient ductility is not obtained, but, if it exceeds 20 sec., pearlite forms and the envisaged microstructure containing retained austenite by 5% to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite is not obtained. In addition, in order to easily accelerate the ferrite transformation, it is desirable that the temperature range in which a steel sheet is retained for 1 to 20 sec. be from the Ar_1 transformation temperature to 800°C. Further, in order not to lower productivity drastically, it is desirable that the retention time, which has been defined earlier as from 1 to 20 sec., be 1 to 10 sec.

[0086] For satisfying all these conditions, it is necessary to reach said temperature range rapidly at a cooling rate of 20°C/sec. or more after completing finish rolling. The upper limit of a cooling rate is not particularly specified, but, in consideration of the capacity of cooling equipment, a reasonable cooling rate is 300°C/sec. or less. In addition, when a cooling rate is too high, it becomes impossible to accurately control the cooling end temperature and over-cooling may happen as a result of overshooting to the Ar_1 transformation temperature or below. For this reason, the cooling rate here is, desirably, 150°C/sec. or less.

[0087] Subsequently, a steel sheet is cooled at a cooling rate of 20°C/sec. or more from the above temperature range to a coiling temperature (CT). At a cooling rate below 20°C/sec., pearlite or bainite containing carbides forms and a sufficient amount of retained austenite is not obtained and, as a result, the envisaged microstructure containing retained austenite by 5% to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite is not obtained. The effects of the present invention can be enjoyed without bothering to particularly specify an upper limit of the cooling rate down to the coiling temperature but, for avoiding warping caused by thermal strain, it is preferable to control the cooling rate to 300°C/sec. or less.

[0088] In order to obtain a good burring workability, in addition to improving a shape fixation property, in the present invention, it is necessary that the microstructure is a compound structure containing bainite or ferrite and bainite as the

phase accounting for the largest volume percentage. To do so, the present invention does not particularly specify the process conditions after the completion of finish rolling until coiling at a prescribed coiling temperature, except for the cooling rate applied during the process. However, in case where a steel sheet is required to have both a good burring workability and a high ductility without sacrificing the burring workability too much, it is acceptable to retain a hot-rolled steel sheet for 1 to 20 sec. in the temperature range from the Ar_3 transformation temperature to the Ar_1 transformation temperature (the ferrite-austenite two-phase zone).

[0089] Here, the retention of a hot-rolled steel sheet is carried out for accelerating ferrite transformation in the two-phase zone. If the retention time is less than 1 sec., the ferrite transformation in the two-phase zone is insufficient, and a sufficient ductility is not obtained, but, if it exceeds 20 sec., pearlite forms and the envisaged microstructure of a compound structure containing bainite or ferrite and bainite as the phase accounting for the largest volume percentage is not obtained. In addition, in order to easily accelerate the ferrite transformation, it is desirable that the temperature range in which a steel sheet is retained for 1 to 20 sec. be from the Ar_1 transformation temperature to 800°C. Further, in order not to lower productivity drastically, it is desirable that the retention time, which has been defined earlier as from 1 to 20 sec., be 1 to 10 sec.

[0090] For satisfying all these conditions, it is necessary to reach said temperature range rapidly at a cooling rate of 20°C/sec. or more after completing the finish rolling. The upper limit of a cooling rate is not particularly specified, but, in consideration of the capacity of cooling equipment, a reasonable cooling rate is 300°C/sec. or less. In addition, when a cooling rate is too high, it becomes impossible to accurately control the cooling end temperature and over-cooling may happen as a result of overshooting to the Ar_1 transformation temperature or below, losing the effect of improving ductility. For this reason, the cooling rate here is, desirably, 150°C/sec. or less.

[0091] Subsequently, a steel sheet is cooled at a cooling rate of 20°C/sec. or more from the above temperature range to a coiling temperature (CT). At a cooling rate below 20°C/sec., pearlite or bainite containing carbides forms and the envisaged microstructure of a compound structure containing bainite or ferrite and bainite as the phase accounting for the largest volume percentage is not obtained. The effects of the present invention can be enjoyed without bothering to particularly specify an upper limit of the cooling rate down to the coiling temperature but, for avoiding warping caused by thermal strain, it is preferable to control the cooling rate to 300°C/sec. or less.

[0092] The present invention does not particularly specify the process conditions after the completion of finish rolling until coiling at a prescribed coiling temperature (CT). However, in case where a steel sheet is required to have both a good burring workability and a high ductility without sacrificing the burring workability too much, it is acceptable to retain a hot-rolled steel sheet for 1 to 20 sec. in the temperature range from the Ar_3 transformation temperature to the Ar_1 transformation temperature (the ferrite-austenite two-phase zone). Here, the retention of a hot-rolled steel sheet is carried out for accelerating ferrite transformation in the two-phase zone. If the retention time is less than 1 sec., the ferrite transformation in the two-phase zone is insufficient, and a sufficient ductility is not obtained, but, if it exceeds 20 sec., the size of precipitates containing Ti and/or Nb becomes coarse and there arises a probability that they do not contribute to the increase of steel strength caused by precipitation strengthening. In addition, in order to easily accelerate the ferrite transformation, it is desirable that the temperature range in which a steel sheet is retained for 1 to 20 sec. be from the Ar_1 transformation temperature to 860°C. Further, in order not to lower productivity drastically, it is desirable that the retention time, which has been defined earlier as from 1 to 20 sec., be 1 to 10 sec.

[0093] For satisfying all these conditions, it is necessary to reach the temperature range rapidly at a cooling rate of 20°C/sec. or more after completing finish rolling. The upper limit of a cooling rate is not particularly specified, but, in consideration of the capacity of cooling equipment, a reasonable cooling rate is 300°C/sec. or less. In addition, when a cooling rate is too high, it becomes impossible to accurately control the cooling end temperature and over-cooling may happen as a result of overshooting to the Ar_1 transformation temperature or below, losing the effect of improving ductility. For this reason, the cooling rate here is, desirably, 150°C/sec. or less.

[0094] Subsequently, a steel sheet is cooled from the above temperature range to a prescribed coiling temperature (CT), but it is not necessary to particularly specify a cooling rate for obtaining the effects of the present invention. However, when a cooling rate is too low, the size of precipitates containing Ti and/or Nb becomes coarse and there arises a probability that they do not contribute to the enhancement of steel strength caused by precipitation strengthening. For this reason, it is desirable that the lower limit of the cooling rate be 20°C/sec. or more. The effects of the present invention can be enjoyed without bothering to particularly specify an upper limit of the cooling rate down to the coiling temperature but, for avoiding warping caused by thermal strain, it is preferable to control the cooling rate to 300°C/sec. or less.

[0095] In the present invention, it is not necessary to particularly specify the microstructure of a steel sheet for the purpose of improving a shape fixation property and, thus, the present invention does not particularly specify an upper limit of a coiling temperature. However, in order to carry over the texture of austenite obtained by a finish rolling at a total reduction ratio of 25% or more in the temperature range of the Ar_3 transformation temperature + 100°C or lower, it is desirable to coil a steel sheet at the coiling temperature T_0 shown below or lower. Note that it is unnecessary to set the temperature T_0 equal to or below the room temperature. The temperature T_0 is a temperature defined thermodynamically as a temperature at which austenite and ferrite having the same chemical components as the austenite have

the same free energy. It can be calculated in a simplified manner by the following equation, taking the influences of components other than C into consideration:

$$T_0 = -650.4 \times \%C + B,$$

where, B is determined as follows:

$$B = -50.6 \times M_{\text{neq}} + 894.3,$$

where, M_{neq} is determined from the mass percentages of the component elements as shown below:

$$M_{\text{neq}} = \%Mn + 0.24 \times \%Ni + 0.13 \times \%Si + 0.38 \times \%Mo + 0.55 \times \%Cr + 0.16 \times \%Cu - 0.50 \times \%Al - 0.45 \times \%Co + 0.90 \times \%V.$$

[0096] Note that the influences on T_0 of the mass percentages of the other components specified in the present invention than those included in the above equation are not significant, and are negligible here.

[0097] Since it is not necessary to particularly specify the microstructure of a steel sheet for the purpose of improving a shape fixation property, it is not necessary to particularly specify a lower limit of a coiling temperature. However, for avoiding poor appearance caused by rust when a coil is kept wet with water for a long period of time, it is desirable that a coiling temperature be 50°C or above.

[0098] In order to obtain a low yield ratio, in addition to improving a shape fixation property, in the present invention, it is necessary that the microstructure is a compound structure containing ferrite as the phase accounting for the largest volume percentage and martensite mainly as the second phase. To do so, it is necessary that a coiling temperature be 350°C or less. The reason is because, when a coiling temperature exceeds 350°C, bainite forms and a sufficient amount of martensite is not obtained and, as a result, the envisaged microstructure containing ferrite as the phase accounting for the largest volume percentage and martensite as the second phase is not obtained. It is not necessary to particularly set forth a lower limit of a coiling temperature but, for avoiding poor appearance caused by rust when a coil is kept wet with water for a long period of time, it is desirable that a coiling temperature be 50°C or above.

[0099] In order to obtain a good ductility, in addition to improving a shape fixation property, in the present invention, it is necessary that the microstructure is a compound structure containing retained austenite by 5 to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite. To do so, a coiling temperature must be restricted to below 450°C. This is because, when a coiling temperature is 450°C or higher, bainite containing carbides forms and a sufficient amount of retained austenite is not obtained and, as a result, the envisaged microstructure containing retained austenite by 5 to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite is not obtained. When a coiling temperature is 350°C or lower, on the other hand, a great amount of martensite forms and a sufficient amount of retained austenite is not obtained and, as a result, the envisaged microstructure containing retained austenite by 5 to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite is not obtained. For this reason, the coiling temperature is limited to over 350°C.

[0100] Further, while the present invention does not particularly specify a cooling rate to be applied after coiling, when Cu is added by 1% or more, Cu precipitates after coiling and not only workability is deteriorated but also solute Cu effective for improving fatigue properties may be lost. For this reason, it is desirable that the cooling rate after coiling be 30°C/sec. or more up to the temperature of 200°C.

[0101] In order to obtain a good burring workability, in addition to improving the shape fixation property, in the present invention, it is necessary that the microstructure is a compound structure containing bainite or of ferrite and bainite as the phase accounting for the largest volume percentage. To do so, a coiling temperature has to be restricted to 450°C or more. This is because, when a coiling temperature is below 450°C, retained austenite or martensite considered detrimental to burring workability may form in a great amount and, as a consequence, the envisaged microstructure of a compound structure containing bainite or ferrite and bainite as the phase accounting for the largest volume percentage is not obtained. Further, while the present invention does not particularly specify a cooling rate to be applied after coiling, when Cu is added by 1.2% or more, Cu precipitates after coiling and not only workability is deteriorated but also solute

Cu effective for improving fatigue properties may be lost. For this reason, it is desirable that the cooling rate after coiling be 30°C/sec. or more up to the temperature of 200°C.

[0102] The present invention does not particularly specify a coiling temperature (CT) for the purpose of obtaining a steel sheet according to the claims. However, in order to carry over the texture of austenite obtained by a finish rolling at a total reduction ratio of 25% or more in the temperature range of the Ar_3 transformation temperature + 100°C or lower, it is desirable to coil a steel sheet at the coiling temperature T_0 shown below or lower. The temperature T_0 is a temperature defined thermodynamically as a temperature at which austenite and ferrite having the same chemical components as the austenite have the same free energy. It can be calculated in a simplified manner by the following equation, taking the influences of components other than C into consideration:

$$T_0 = -650.4 \times \%C + B,$$

where, B is determined as follows:

$$B = -50.6 \times M_{neq} + 894.3,$$

where, M_{neq} is determined from the mass percentages of the component elements as shown below:

$$M_{neq} = \%Mn + 0.24 \times \%Ni + 0.13 \times \%Si + 0.38 \times \%Mo + 0.55 \times \%Cr + 0.16 \times \%Cu - 0.50 \times \%Al - 0.45 \times \%Co + 0.90 \times \%V.$$

[0103] Note that the influences on T_0 of the mass percentages of the other components specified in the present invention than those included in the above equation are not significant, and are negligible here.

[0104] As for the lower limit of a coiling temperature (CT), on the other hand, it is desirable to coil a steel sheet at a temperature above 350°C, because, at 350°C or below, the precipitates containing Ti and/or Nb do not form in a sufficient amount and solute C remains in the steel, probably deteriorating workability. Further, while the present invention does not particularly specify a cooling rate to be applied after coiling, when Cu is added by 1% or more and if the coiling temperature (CT) exceeds 450°C, Cu precipitates after coiling, and not only workability is deteriorated but also solute Cu effective for improving fatigue properties may be lost. For this reason, when a coiling temperature (CT) exceeds 450°C, it is desirable that the cooling rate after coiling be 30°C/sec. or more up to the temperature of 200°C.

[0105] After completing a hot rolling process, a steel sheet may undergo pickling, as occasion demands, and then skin pass rolling at a reduction ratio of 10% or less or cold rolling at a reduction ratio up to 40% or so, either in-line or off-line. However, in this case, in order to obtain the effect to reduce a friction coefficient by applying a composition having a lubricating effect, it is necessary to control the reduction ratio of the skin pass rolling so that the arithmetic average of roughness R_a of at least one of the surfaces of a steel sheet becomes 1 to 3.5 μm after the skin pass rolling.

[0106] Next, in the case where a cold-rolled steel sheet is used as a final product, the present invention does not particularly specify the conditions of finish hot rolling. However, for obtaining a better shape fixation property, it is desirable to apply a total reduction ratio of 25% or more in the temperature range of the Ar_3 transformation temperature + 100°C or lower. Further, while it is acceptable that the temperature at the final pass (FT) of a finish rolling be below the Ar_3 transformation temperature, in such a case, since an intensively work-induced structure remains in ferrite having precipitated before or during the rolling, it is desirable that the work-induced structure be recovered and recrystallized by a subsequent coiling process or heat treatment.

[0107] The total reduction ratio at a cold rolling subsequent to pickling is set at less than 80%. This is because, when the total reduction ratio at a cold rolling is 80% or more, the ratio of integrated X-ray diffraction strength in {111} and {554} crystal planes parallel to the plane of a steel sheet, which constitute a recrystallization texture usually obtained by cold rolling, tends to be large. A preferable total reduction ratio at a cold rolling is 70% or less. The effects of the present invention can be enjoyed without particularly specifying a lower limit of a cold reduction ratio, but, for controlling the X-ray diffraction strengths in the crystal orientation components within appropriate ranges, it is desirable to set the lower limit of a cold reduction ratio at 3% or more.

[0108] The discussion here is based on the assumption that the heat treatment of a cold-rolled steel sheet is carried

out in a continuous annealing process.

[0109] In the first place, a steel sheet is heat-treated for 5 to 150 sec. in the temperature range of the Ac_3 transformation temperature + 100°C or lower. If the upper limit of a heat treatment temperature exceeds the Ac_3 transformation temperature + 100°C, ferrite having formed through recrystallization transforms into austenite, the texture formed by the growth of austenite grains is randomized, and the texture of ferrite finally obtained is also randomized. For this reason, the upper limit of a heat treatment temperature is determined to be the Ac_3 transformation temperature + 100°C or lower. The Ac_1 and Ac_3 transformation temperatures mentioned here can be expressed in relation to steel chemical components using, for example, the expressions according to p. 273 of the Japanese translation of The Physical Metallurgy of Steels by W. C. Leslie (published from Maruzen in 1985, translated by Hiroshi Kumai and Tatsuhiko Noda). It is acceptable if the lower limit of a heat treatment temperature is equal to or above the recovery temperature, because it is not necessary to particularly specify the microstructure of a steel sheet for the purpose of improving a shape fixation property. When a heat treatment temperature is below the recovery temperature, however, a work-induced structure is retained and formability is significantly deteriorated. For this reason, the lower limit of a heat treatment temperature is determined to be equal to or above the recovery temperature. For obtaining yet better ductility, it is desirable that a heat treatment temperature be equal to or above the recrystallization temperature of a steel.

[0110] Further, with regard to a retention time in the above temperature range, if the retention time is shorter than 5 sec., it is insufficient for having cementite completely dissolve again, but, if the retention time exceeds 150 sec., the effect of the heat treatment is saturated and, what is more, productivity is lowered. For this reason, the retention time is determined to be in the range from 5 to 150 sec.

[0111] In particular, the retention time is determined to be in the range from 5 to 150 sec. too, because, if the retention time in the temperature range is shorter than 5 sec., it is insufficient for carbonitrides of Ti and Nb to completely dissolve again, but, if the retention time exceeds 150 sec., the effect of the heat treatment is saturated and, what is more, productivity is lowered.

[0112] The present invention does not particularly specify the conditions of cooling after a heat treatment. However, for the purpose of controlling a microstructure, a mere cooling process or the combination of a retention process at a certain temperature with a cooling process may be employed as occasion demands, as it is mentioned later.

[0113] In order to obtain a low yield ratio, in addition to improving a shape fixation property, in the present invention, it is necessary that the microstructure is a compound structure containing ferrite as the phase accounting for the largest volume percentage and martensite mainly as the second phase. To do so, a hot-rolled steel sheet is determined to be retained for 5 to 150 sec. in the temperature range from the Ac_1 transformation temperature to the Ac_3 transformation temperature + 100°C, as described earlier. In this case, if cementite has precipitated in an as hot-rolled state and if the temperature is too low even it is within said temperature range, it takes too long a time for the cementite to dissolve again. When the temperature is too high, on the other hand, the volume percentage of austenite becomes too large and the concentration of C in the austenite becomes too low, and, as a consequence, the temperature history of the steel is likely to pass through the transformation nose of bainite or pearlite containing much carbide. For this reason, it is desirable to heat the steel sheet to a temperature from 780 to 850°C.

[0114] If a cooling rate after the retention is below 20°C/sec., the temperature history of the steel is likely to pass through the transformation nose of bainite or pearlite containing much carbide, and, for this reason, the cooling rate is determined to be 20°C/sec. or more. If a cooling end temperature is above 350°C, the envisaged microstructure containing ferrite as the phase accounting for the largest volume percentage and martensite as the second phase is not obtained. For this reason, the cooling must be continued down to a temperature of 350°C or lower. The present invention does not particularly specify a lower limit of a temperature at the end of a cooling process, but, if water cooling or mist cooling is applied and a coil is kept wet with water for a long period of time, for avoiding poor appearance caused by rust, it is desirable that a temperature at the end of a cooling process be 50°C or above.

[0115] In order to obtain a good ductility, in addition to improving a shape fixation property, in the present invention, it is necessary that the microstructure is a compound structure containing retained austenite by 5 to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite.

[0116] To do so, a steel sheet is determined to be heat-treated for 5 to 150 sec. in a temperature range from the Ac_1 transformation temperature to the Ac_3 transformation temperature + 100°C, as described earlier. In this case, if cementite has precipitated in an as hot-rolled state and if the temperature is too low even within the temperature range, it takes too long a time for the cementite to dissolve again. When the temperature is too high, on the other hand, the volume percentage of austenite becomes too large and the concentration of C in the austenite becomes too low, and, as a consequence, the temperature history of the steel is likely to pass through the transformation nose of bainite or pearlite containing much carbide. For this reason, it is desirable to heat the steel sheet to a temperature from 780 to 850°C. If a cooling rate after the retention is below 20°C/sec., the temperature history of the steel is likely to pass through the transformation nose of bainite or pearlite containing much carbide, and, for this reason, the cooling rate is determined to be 20°C/sec. or more.

[0117] Next, with respect to a process to accelerate bainite transformation and stabilize a required amount of retained

austenite, if a temperature at the end of cooling is 450°C or higher, the retained austenite is decomposed into bainite or pearlite containing much carbide, and the envisaged microstructure containing retained austenite by 5 to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite is not obtained. If a cooling end temperature is below 350°C, martensite may form in a great amount and a sufficient amount of retained austenite cannot be secured and, as a result, the envisaged microstructure containing retained austenite by 5 to 25% in terms of volume percentage and the balance mainly consisting of ferrite and bainite is not obtained. For this reason, the cooling must be carried out to the temperature range of above 350°C.

[0118] Further, with respect to the retention time in the above temperature range, if the retention time is shorter than 5 sec., bainite transformation for stabilizing retained austenite is insufficient and, as a consequence, the unstable retained austenite may transform into martensite at the end of the subsequent cooling stage, and, as a result, the envisaged microstructure containing retained austenite by 5 to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite is not obtained. If the retention time exceeds 600 sec., on the other hand, bainite transformation overshoots and a required amount of stable retained austenite is not formed, and, as a result, the envisaged microstructure containing retained austenite by 5 to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite is not obtained. For this reason, the retention time in the temperature range is determined to be from 5 to 600 sec.

[0119] Finally, if a cooling rate up to the end of cooling is below 5°C/sec., there is a probability that the bainite transformation overshoots during the cooling and a required amount of stable retained austenite is not formed, and, as a consequence, the envisaged microstructure containing retained austenite by 5 to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite may not be obtained. Therefore, the cooling rate is determined to be 5°C/sec. or more. In addition, if a temperature at the end of cooling exceeds 200°C, an aging property may be deteriorated and, therefore, a cooling end temperature is determined to be 200°C or lower. The present invention does not particularly specify the lower limit of a temperature at the end of cooling, but, if water cooling or mist cooling is applied and a coil is kept wet with water for a long period of time, for avoiding poor appearance caused by rust, it is desirable that a cooling end temperature be 50°C or above.

[0120] Additionally, in order to obtain a good burring workability, in addition to improving a shape fixation property, in the present invention, it is necessary that the microstructure of a compound structure containing bainite or ferrite and bainite as the phase accounting for the largest volume percentage is obtained. To do so, the lower limit of the heat treatment temperature is determined to be the Ac_1 transformation temperature or higher. If the lower limit of the heat treatment temperature is below the Ac_1 transformation temperature, the envisaged compound structure containing bainite or of ferrite and bainite as the phase accounting for the largest volume percentage is not obtained. When it is intended to obtain both a good burring workability and a high ductility without sacrificing the burring workability too much, the heat treatment temperature is determined to be in the range from the Ac_1 transformation temperature to the Ac_3 transformation temperature (the ferrite-austenite two-phase zone) for the purpose of increasing the volume percentage of ferrite. Further, in order to obtain a yet better burring workability, it is desirable that the heat treatment temperature is in the range from the AC_3 transformation temperature to the AC_3 transformation temperature + 100°C for increasing the volume percentage of bainite.

[0121] The present invention does not particularly specify the conditions of a cooling process, but, when said heat treatment temperature is in the range from AC_1 transformation temperature to AC_3 transformation temperature, it is desirable to cool a steel sheet at a cooling rate of 20°C/sec. or more to the temperature range from over 350°C to not more than the temperature T_0 specified herein earlier. This is because, if a cooling rate is below 20°C/sec., the temperature history of the steel is likely to pass through the transformation nose of bainite or pearlite containing much carbide. Further, when a cooling end temperature is 350°C or lower, martensite, which is considered detrimental to burring properties, may form in a great amount and, as a result, the envisaged compound structure containing bainite or ferrite and bainite as the phase accounting for the largest volume percentage is not obtained. For this reason, it is desirable that a cooling end temperature be above 350°C. In addition, in order to carry over the texture obtained up to the previous process, it is desirable that the cooling end temperature be T_0 or lower.

[0122] Finally, if a cooling rate down to the temperature at the end of a cooling process is 20°C/sec. or more, there is a probability that martensite, which is considered detrimental to burring properties, forms in a great amount during the cooling and, as a result, the envisaged compound structure containing bainite or ferrite and bainite as the phase accounting for the largest volume percentage may not be obtained. Consequently, it is desirable that the cooling rate be below 20°C/sec. Besides, if a temperature at the end of a cooling process exceeds 200°C, aging properties may be deteriorated. Therefore, it is desirable that the temperature at the end of the cooling process be 200°C or lower. For avoiding poor appearance caused by rust, if water cooling or mist cooling is applied and a coil is kept wet with water for a long period of time, it is desirable that the lower limit of a temperature at the end of a cooling process be 50°C or above.

[0123] On the other hand, in the case where said heat treatment temperature is within the range from the AC_3 transformation temperature to the AC_3 transformation temperature + 100°C, it is desirable to cool a steel sheet at a cooling rate of 20°C/sec. or more to a temperature of 200°C or below. This is because, if a cooling rate is below 20°C/sec., the

temperature history of the steel is likely to pass through the transformation nose of bainite or pearlite containing much carbide. In addition, if a temperature at the end of a cooling process exceeds 200°C, aging properties may be deteriorated. Therefore, it is desirable that a temperature at the end of a cooling process be 200°C or lower. For avoiding poor appearance caused by rust, if water cooling or mist cooling is applied and a coil is kept wet with water for a long period of time, it is desirable that the lower limit of a temperature at the end of a cooling process be 50°C or above.

[0124] In addition, for the purpose of obtaining a steel sheet according to the claims in the present invention, it is not necessary to particularly specify the conditions of cooling after the heat treatment. However, it is desirable that a steel sheet is cooled at a cooling rate of 20°C/sec. or more to a temperature range from over 350°C to the temperature T₀ specified herein earlier. This is because, if a cooling rate is below 20°C/sec., it is concerned that the size of precipitates containing Ti and/or Nb becomes coarse and they do not contribute to the increase of strength through precipitation strengthening. In addition, if a cooling end temperature is 350°C or below, there is a probability that the precipitates containing Ti and/or Nb do not form in a sufficient amount, and solute C remains in steel, deteriorating workability. For this reason, it is desirable that a cooling end temperature be above 350°C. Further, if a temperature at the end of a cooling process is over 200°C, aging properties may be deteriorated and, for this reason, it is desirable that a temperature at the end of a cooling process be 200°C or lower. If water cooling or mist cooling is applied and a coil is kept wet with water for a long period of time, for avoiding poor appearance caused by rust, it is desirable that the lower limit of a temperature at the end of a cooling process be 50°C or above.

[0125] After the above-mentioned processes, a skin pass rolling is applied as occasion demands. Note that, in this case, in order to obtain the effect to lower a friction coefficient by applying a composition having a lubricating effect, the reduction ratio of a skin pass rolling has to be so controlled that the arithmetic average of roughness Ra of at least one of the surfaces of a steel sheet is 1 to 3.5 μm after the rolling.

[0126] In order to apply zinc plating to a hot-rolled steel sheet after pickling or a cold-rolled steel sheet after completing the above heat treatment for recrystallization, the steel sheet has to be dipped in a zinc plating bath. It may be subjected to an alloying process as occasion demands.

[0127] Finally, in order to secure a good drawability, a composition having a lubricating effect is applied to a steel sheet after completing the above-mentioned production processes. The method of the application is not limited specifically as far as a desired coating thickness is obtained. Electrostatic coating or a method using a roll coater is commonly employed.

Example 1

[0128] Steels A to L having the chemical components listed in Table 1 were melted and refined in a converter, cast continuously into slabs, reheated and then rolled through rough rolling and finish rolling into steel sheets 1.2 to 5.5 mm in thickness, and then coiled. Note that the chemical components in the table are expressed in terms of mass percent.

[0129] Then, Table 2 shows the details of the production conditions. In the table, "SRT" means the slab reheating temperature, "FT" the finish rolling temperature at the final pass, and "reduction ratio" the total reduction ratio in the temperature range of the A_{r3} transformation temperature + 100°C or lower. Note that, in the case where a steel sheet is cold-rolled after being hot-rolled, the restriction is not necessary to be applied and, therefore, each relevant space of "reduction ratio" is filled with a horizontal bar, meaning "not applicable." Further, "lubrication" indicates if or not lubrication is applied in the temperature range of the A_{r3} transformation temperature + 100°C or lower. In the column of "coiling", O means that a coiling temperature (CT) is T₀ or lower, and × that a coiling temperature is above T₀. Note that, since it is not necessary to restrict the coiling temperature as one of the production conditions in the case of a cold-rolled steel sheet, each relevant space is filled with a horizontal bar, meaning "not applicable." Some of the steel sheets underwent pickling, cold rolling and annealing after hot rolling. The thickness of the cold-rolled steel sheets ranged from 0.7 to 2.3 mm.

[0130] Also in the table, "cold reduction ratio" means a total cold reduction ratio, and "time" the time of annealing. In the column of "annealing", O means that the annealing temperature is within the range from the recovery temperature to the A_{r3} transformation temperature + 100°C, and × that it is outside the range. Steel L underwent a descaling under the condition of an impact pressure of 2.7 MPa and a flow rate of 0.01 l/cm² after rough rolling. Further, among the steels mentioned above, steels G and F-5 underwent zinc plating. Further, after completing the above production processes, a composition having a lubricating effect was applied using an electrostatic coating apparatus or a roll coater.

[0131] A hot-rolled steel sheet thus prepared was subjected to a tensile test by forming a specimen into a No. 5 test piece according to JIS Z 2201 and in accordance with the test method specified in JIS Z 2241. The yield strength (σ_Y), tensile strength (σ_B) and breaking elongation (E1) are shown in Tables 2-1 and 2-2.

[0132] Then, a test piece 30 mm in diameter was cut out from a position of 1/4 or 3/4 of the width of a steel sheet, the surfaces were ground up to the three-triangle grade finish (the second finest finish) and, subsequently, strain was removed by chemical polishing or electrolytic polishing. A test piece thus prepared was subjected to X-ray diffraction strength measurement in accordance with the method described in pages 274 to 296 of the Japanese translation of Elements of X-ray Diffraction by B. D. Cullity (published in 1986 from AGNE Gijutsu Center, translated by Gentaro

Matsumura).

[0133] Here, the average ratio of the X-ray strength in the orientation component group of $\{100\}<011>$ to $\{223\}<110>$ to random X-ray diffraction strength was obtained by obtaining the X-ray diffraction strengths in the principal orientation components included in the orientation component group, namely $\{100\}<011>$, $\{116\}<110>$, $\{114\}<110>$, $\{113\}<110>$, $\{112\}<110>$, $\{335\}<110>$ and $\{223\}<110>$, from the three-dimensional texture calculated by, either the vector method based on the pole figure of $\{110\}$ or the series expansion method using two or more (desirably, three or more) pole figures out of the pole figures of $\{110\}$, $\{100\}$, $\{211\}$ and $\{310\}$.

[0134] For example, as the ratio of the X-ray strength in the above crystal orientation components to random X-ray diffraction strength calculated by the latter method, the strengths of $(001)[1-10]$, $(116)[1-10]$, $(114)[1-10]$, $(113)[1-10]$, $(112)[1-10]$, $(335)[1-10]$ and $(223)[1-10]$ at a $\phi_2 = 45^\circ$ cross section in a three-dimensional texture can be used without modification. Note that the average ratio of the X-ray strength in the orientation component group of $\{100\}<011>$ to $\{223\}<110>$ to random X-ray diffraction strength is the arithmetic average ratio in all the above orientation components.

[0135] When it is impossible to obtain the strengths in all these orientation components, the arithmetic average of the strengths in the orientation components of $\{100\}<011>$, $\{116\}<110>$, $\{114\}<110>$, $\{112\}<110>$ and $\{223\}<110>$ may be used as a substitute.

[0136] In addition to the above, the average ratio of the X-ray strength in three orientation components of $\{554\}<225>$, $\{111\}<112>$ and $\{111\}<110>$ to random X-ray diffraction strength can be calculated from the three-dimensional texture obtained in the same manner as above.

[0137] In Table 2, "strength 1" under "ratios of X-ray strength to random X-ray diffraction strength" means the average ratio of the X-ray strength in the orientation component group of $\{100\}<011>$ to $\{223\}<110>$ to random X-ray diffraction strength, and "strength 2" the average ratio of the X-ray strength in the above three orientation components of $\{554\}<225>$, $\{111\}<112>$ and $\{111\}<110>$ to random X-ray diffraction strength.

[0138] Then, for the purpose of examining the shape fixation property of a steel sheet, a test piece 50 mm in width and 270 mm in length was cut out from a position of 1/4 or 3/4 of the width of the steel sheet so that the length was in the rolling direction, and it was subjected to a hat bending test using a punch 78 mm in width having shoulders 5 mm in radius, and a die having shoulders 5 mm in radius. The shape of the test piece having undergone the bending test was measured along the width centerline using a three-dimensional shape measuring apparatus. A shape fixation property was evaluated using the following indicators: dimensional accuracy evaluated by the value obtained by subtracting the width of the punch from the distance between points ⑤ as shown in Fig. 1; the amount of spring back defined by the average of the two values at the left and right portions, obtained by subtracting 90° from the angle between the straight line passing through points ① and ② and the straight line passing through points ③ and ④; and the amount of wall warping defined by the average of the inverse numbers of the curvature between points ③ and ⑤ at the left and right portions.

[0139] It has to be noted here that the amounts of spring back and wall warping vary depending on a blank holding force (BHF). The tendency of the effects of the present invention does not change even under various BHF conditions, but, in consideration of the fact that too high BHF cannot be imposed when an actual part is pressed in a production site, this time, the hat bending test is applied to various steel sheets under the BHF of 29 kN. Based on the dimensional accuracy and wall warping amount obtained by the bending test, a shape fixation property can be finally judged in terms of the dimensional accuracy (Ad). Since, as it is well known, dimensional accuracy lowers as the strength of a steel sheet increases, the value $\Delta d/\sigma B$ shown in Table 2 is used as an indicator of the shape fixation property.

[0140] An arithmetic average of roughness Ra was measured using a non-contact laser type measuring apparatus and in accordance with the method specified in JIS B 0601-1994.

[0141] A friction coefficient was defined as the ratio (f/F) of a drawing force (f) to a pressing force (F) in the following test procedures: as seen in Fig. 2, a steel sheet to be evaluated was placed between two flat plates having a Vickers hardness of Hv600 or more at the surfaces; a force (F) perpendicular to the surfaces of the subject steel sheet was imposed so that the contact stress was 1.5 to 2 kgf/mm²; and the force (f) required for pulling out the subject steel sheet from between the flat plates was measured.

[0142] In the last place, an index of drawability of a steel sheet was defined as the quotient (D/d) obtained by dividing the maximum diameter (D) in which drawing had been successful by the diameter (d) of a cylindrical punch when a steel sheet was formed into a disk-shape and subjected to drawing work using the cylindrical punch. In this test, steel sheets were formed into various disk-shapes 300 to 400 mm in diameter, and a cylindrical punch 175 mm in diameter having a shoulder 10 mm in radius around the bottom face and a die having a shoulder 15 mm in radius were used in the evaluation of drawability. with regard to a blank holding force, 5 kN was imposed in the case of steels A to D, 100 kN in the case of steels E, F-1 to F-10, G and I to L, and 150 kN in the case of steel H.

[0143] It was understood that all the steel sheets having a friction coefficient within the range of the present invention showed a higher drawability index (D/d) than a steel sheet having a friction coefficient above the range of the present invention and the drawability index of any of the former steel sheets was 1.91 or more.

[0144] The examples according to the present invention are 11 steels, namely steels A, E, F-1, F-2, F-7, G, H, I, J, K

and L. In these examples, obtained are high-strength thin steel sheets drawable and excellent in a shape fixation property :characterized in that, the steel sheets contain prescribed amounts of components, at least on a plane at the center of the thickness of any of the steel sheets, the average ratio of the X-ray strength in the orientation component group of {100}<011> to {223}<110> to random X-ray diffraction strength is 3 or more and the average ratio of the X-ray strength in three orientation components of {554}<225>, {111}<112> and {111}<110> to random X-ray diffraction strength is 3.5 or less, the arithmetic average of the roughness Ra of at least one of the surfaces is 1 to 3.5 μm , and the surfaces of the steel sheet are covered with a composition having a lubricating effect; and further characterized in that at least one of the friction coefficients in the rolling direction and in the direction perpendicular to the rolling direction at 0 to 200°C is 0.05 to 0.2. As a consequence, in the evaluations by the methods according to the present invention, the indices of the shape fixation property of these steels were superior to those of conventional steels.

[0145] All the steels in the tables other than those mentioned above were outside the ranges of the present invention for the following reasons.

[0146] In steel B, the content of C was outside the range of the present invention and, as a consequence, a sufficient strength (σB) was not obtained. In steel C, the content of P was outside the range of the present invention and, as a consequence, good fatigue properties were not obtained. In steel D, the content of S was outside the range of the present invention and, as a consequence, a sufficient elongation (E1) was not obtained. In steel F-3, since a composition having a lubricating effect was not applied, the envisaged friction coefficient was not obtained and, as a consequence, a sufficient drawability (D/d) was not obtained.

[0147] In steel F-4, since the arithmetic average of roughness Ra was outside the range specified in claim 1 of the present invention, the envisaged friction coefficient specified was not obtained and, as a consequence, a sufficient drawability (D/d) was not obtained. In steel F-5, since the total reduction ratio in the temperature range of the Ar_3 transformation temperature + 100°C or lower was outside the range of the present invention, the envisaged texture specified in claim 1 was not obtained and, as a consequence, a sufficient shape fixation property ($\Delta\text{d}/\sigma\text{B}$) was not obtained.

[0148] In steel F-6, since the finish-rolling termination temperature (FT) was outside the range of the present invention and the coiling temperature was also outside the range specified in the description of the present invention, the envisaged texture specified in claim 1 was not obtained and, as a consequence, a sufficient shape fixation property ($\Delta\text{d}/\sigma\text{B}$) was not obtained. In steel F-8, since the cold reduction ratio was outside the range of the present invention, the envisaged texture specified in claim 1 was not obtained and, as a consequence, a sufficient shape fixation property ($\Delta\text{d}/\sigma\text{B}$) was not obtained. In steel F-9, since the annealing temperature was outside the range of the present invention, the envisaged texture specified in claim 1 was not obtained and, as a consequence, a sufficient shape fixation property ($\Delta\text{d}/\sigma\text{B}$) was not obtained. In steel F-10, since the annealing time was outside the range of the present invention, the envisaged texture specified in claim 1 was not obtained and, as a consequence, a sufficient shape fixation property ($\Delta\text{d}/\sigma\text{B}$) was not obtained.

Table 1

Steel	Chemical composition (in mass %)							Remarks
	C	Si	Mn	P	S	Al	Others	
A	0.041	0.02	0.26	0.012	0.0011	0.033	REM:0.0008	Invented steel
B	<u>0.002</u>	0.01	0.11	0.011	0.0070	0.044	Ti:0.057	Comparative steel
C	0.022	0.02	0.22	<u>0.300</u>	0.0015	0.012		Comparative steel
D	0.018	0.04	0.55	0.090	<u>0.0400</u>	0.033		Comparative steel
E	0.058	0.92	1.16	0.008	0.0009	0.041	Cu:0.48, B:0.0002	Invented steel
F	0.081	0.88	1.24	0.007	0.0008	0.031		Invented steel
G	0.049	0.91	1.27	0.006	0.0011	0.025	Cu:0.78, Ni:0.33	Invented steel
H	0.094	1.89	1.87	0.008	0.0007	0.024	Ti:0.071, Nb:0.022	Invented steel
I	0.060	1.05	1.16	0.007	0.0008	0.033	Mo:0.11	Invented steel
J	0.061	0.91	1.21	0.005	0.0011	0.030	V:0.02, Cr:0.08	Invented steel
K	0.055	1.21	1.10	0.008	0.0007	0.024	Zr:0.03	Invented steel

EP 1 444 374 B9

(continued)

Steel	Chemical composition (in mass %)							Remarks
	C	Si	Mn	P	S	Al	Others	
L	0.050	1.14	1.00	0.007	0.0009	0. 031	Ca: 0.0005	Invented steel

[0149] Underlined values are outside range of the invented steel.

Table 2-1

Steel	Classifi	Production conditions						Ratios of X-ray strength to random X-ray diffraction strength			
		Hot rolling process			Cold rolling and annealing processes						
		SRT (°C)	FT (°C)	Reduction ratio (%)	Lubrication	Coiling	Cold reduction ratio (%)	Annealing	Time (S)	Strength ratio 1	Strength ratio 2
A	Hot-rolled	1250	880	42	<u>Not applied</u>	○	-	-	-	5.8	0.7
B	Hot-rolled	1250	890	30	Applied	○	-	-	-	<u>1.3</u>	<u>6.1</u>
C	Hot-rolled	1200	880	30	<u>Not applied</u>	○	-	-	-	<u>0.8</u>	1.3
D	Hot-rolled	1200	880	30	<u>Not applied</u>	○	-	-	-	<u>1.2</u>	0.9
E	Hot-rolled	1150	870	42	<u>Not applied</u>	○	-	-	-	8.1	1.8
F-1	Hot-rolled	1200	870	42	<u>Not applied</u>	○	-	-	-	7.2	2.1
F-2	Hot-rolled	1200	870	42	Applied	○	-	-	-	8.3	1.4
F-3	Hot-rolled	1200	870	42	Applied	○	-	-	-	8.1	1.5
F-4	Hot-rolled	1200	970	42	<u>Not applied</u>	○	-	-	-	8.4	1.4
F-5	Hot-rolled	1300	950	<u>0</u>	<u>Not applied</u>	○	-	-	-	<u>1.8</u>	1.5
F-6	Hot-rolled	1300	970	<u>0</u>	<u>Not applied</u>	×	-	-	-	<u>1.8</u>	1.7
F-7	Cold-rolled	1200	860	-	Applied	-	65	○	90	4.2	2.3
F-8	Cold-rolled	1200	830	-	Applied	-	80	○	90	<u>2.8</u>	4.2
F-9	Cold-rolled	1200	860	-	Applied	-	65	-	90	<u>1.7</u>	2.6
F-10	Cold-rolled	1200	860	-	Applied	-	65	○	<u>2</u>	<u>1.8</u>	2.2
G	Hot-rolled	1150	870	71	<u>Not applied</u>	○	-	-	-	8.5	0.8
H	Hot-rolled	1250	870	30	Applied	○	-	-	-	8.7	0.9
I	Hot-rolled	1200	870	42	<u>Not applied</u>	○	-	-	-	6.7	2.0
J	Hot-rolled	1200	870	71	<u>Not applied</u>	○	-	-	-	5.9	2.1
K	Hot-rolled	1200	870	71	<u>Not applied</u>	○	-	-	-	7.8	1.0
L	Hot-rolled	1150	790	71	<u>Not applied</u>	○	-	-	-	11.0.	1.4

[0150] Underlined values are outside range of the invented steel.

5

10

15

20

25

30

35

40

45

50

55

Table 2-2

Steel	Classification	Surface condition			Mechanical properties			Shape fixation property index	Drawability index	Remarks
		Ra (μm)	Lubrication coating	Friction coefficient	σ_Y (MPa)	σ_B (MPa)	El (%)			
A	Hot-rolled	2.1	Applied	0.06	221	311	47	38	2.29	Invented steel
B	Hot-rolled	1.6	Not applied	<u>0.22</u>	161	281	56	41	<u>1.86</u>	Comparative steel
C	Hot-rolled	1.9	Applied	0.14	220	369	42	40	1.91	Comparative steel
D	Hot-rolled	2.0	Applied	0.17	195	306	44	44	1.97	Comparative steel
E	Hot-rolled	2.2	Applied	0.12	422	637	29	41	2.06	Invented steel
F-1	Hot-rolled	2.3	Applied	0.09	438	668	28	43	2.09	Invented steel
F-2	Hot-rolled	1.4	Applied	0.07	423	655	29	43	2.23	Invented steel
F-3	Hot-rolled	1.5	Not applied	<u>0.23</u>	419	649	29	69	<u>1.80</u>	Comparative steel.
F-4	Hot-rolled	<u>3.7</u>	Applied	<u>0.21</u>	420	661	28	58	<u>1.83</u>	Comparative steel
F-5	Hot-rolled	2.0	Not applied	<u>0.22</u>	431	660	28	60	<u>1.83</u>	Comparative steel
F-6	Hot-rolled	2.3	Not applied	<u>0.23</u>	400	622	32	55	<u>1.77</u>	Comparative steel
F-7	Cold-rolled	0.5	Applied	0.08	418	671	28	36	2.11	Invented steel
F-8	Cold-rolled	0.6	Not applied	0.10	433	667	28	52	2.09	Comparative steel
F-9	Cold-rolled	0.6	Applied	0.07	552	721	20	55	2.17	Comparative steel
F-10	Cold-rolled	0.5	Not applied	0.11	570	710	21	61	2.09	Comparative steel
G	Hot-rolled	2.2	Applied	0.12	441	661	30	52	2.00	Invented steel

(continued)

Steel	Classification	Surface condition			Mechanical properties			Shape fixation property index	Drawability index	Remarks
		Ra (μm)	Lubrication coating	Friction coefficient	σY (MPa)	σB (MPa)	EI (%)			
H	Hot-rolled	1.8	Applied	0.15	776	986	16	43	1.97	Invented steel
I	Hot-rolled	1.9	Applied	0.16	404	638	27	35	1.91	Invented steel
J	Hot-rolled	2.1	Applied	0.11	431	623	26	36	2.03	Invented steel
K	Hot-rolled	2.4	Applied	0.13	425	627	30	33 ,	2.06	Invented steel
L	Hot-rolled	2.1	Applied	0.13	401	588	25	41	2.06	Invented steel
*:×1000										

[0151] Underlined values are outside range of the invented steel.

[0152] As has been explained in detail, the present invention relates to a high-strength thin steel sheet drawable and excellent in a shape fixation property and a method of producing the steel sheet. By using the high-strength thin steel sheet, a good drawability is realized even with a steel sheet having a texture disadvantageous for drawing work, and both a good shape fixation property and a high drawability can be realized at the same time. For this reason, the present invention is highly valuable industrially.

Example 2

[0153] Steels A to L having the chemical components listed in Table 3 were melted and refined in a converter, cast continuously into slabs, reheated at the temperatures shown in Table 4 and then rolled through rough rolling and finish rolling into steel sheets 1.2 to 5.5 mm in thickness, and then coiled. Note that the chemical components in the table are expressed in terms of mass percent. As shown in Tables 4-1, 4-2 and 4-3, some of the steels were hot-rolled with lubrication. Steel L underwent a descaling under the condition of an impact pressure of 2.7 MPa and a flow rate of 0.001 1/cm² after rough rolling. Further, some of the steel sheets underwent pickling, cold rolling and heat treatment, as shown in Table 2, after the hot rolling process. The thickness of the cold-rolled steel sheets ranged from 0.7 to 2.3 mm. In addition, among the steels mentioned above, steels G and A-8 underwent zinc plating.

[0154] Table 4 shows the production conditions in detail. In the table, "SRT" means the slab reheating temperature, "FT" the finish rolling temperature at the final pass, and "reduction ratio" the total reduction ratio in the temperature range of the Ar₃ transformation temperature + 100°C or lower. Note that, in the case where a steel sheet is cold-rolled after being hot-rolled, the restriction is not necessary to be applied and, therefore, each relevant space of "reduction ratio" is filled with a horizontal bar, meaning "not applicable." Further, "lubrication" indicates if or not lubrication is applied in the temperature range of the Ar₃ transformation temperature + 100°C or lower. "CT" means the coiling temperature. However, since it is not necessary to restrict the coiling temperature as one of the production conditions in the case of a cold-rolled steel sheet, each relevant space is filled with a horizontal bar, meaning "not applicable." Then, "cold reduction ratio" means the total cold reduction ratio, "ST" the heat treatment temperature, and "time" a heat treatment time.

[0155] After completing the above production processes, a composition having a lubricating effect was applied using an electrostatic coating apparatus or a roll coater.

[0156] A hot-rolled steel sheet thus prepared was subjected to a tensile test by forming a specimen into a No. 5 test piece according to JIS Z 2201 and in accordance with the test method specified in JIS Z 2241. The yield strength (σ_Y), tensile strength (σ_B) and breaking elongation (E1) are shown in Table 4. In the meantime, burring workability (hole expansibility) was evaluated following the hole expansion test method according to the Standard of the Japan Iron and Steel Federation JFS T 1001-1996. Table 4 shows the hole expansion ratio (λ).

[0157] An X-ray diffraction strength was measured by the same method as employed in Example 1.

[0158] A shape fixation property was evaluated also in the same manner as employed in Example 1.

[0159] Further, an arithmetic average of roughness Ra was measured also by the same method as employed in Example 1.

[0160] Likewise, a friction coefficient was measured by the same method as employed in Example 1.

[0161] Finally, a drawability index of a steel sheet was calculated in the same manner as employed in Example 1. A blank holding force of 10 kN was imposed in the case of steel B, 100 kN in the case of steel J, and 120 kN in the case of steels A, C, E, F, G, H, I and K.

[0162] It was understood that all the steel sheets having friction coefficients within the range of the present invention showed a higher drawability index (D/d) than a steel sheet having a friction coefficient above the range of the present invention and the drawability index of any of the former steel sheets was 1.91 or more.

[0163] The examples according to the present invention are 12 steels, namely steels A-1, A-3, A-4, A-8, A-10, C, E, G, H, I, J, and L. In these examples, high-strength thin steel sheets drawable and excellent in a shape fixation property and a burring property are obtained: characterized in that, the steel sheets contain prescribed amounts of components, at least on a plane at the center of the thickness of any of the steel sheets, the average ratio of the X-ray strength in the orientation component group of {100}<011> to {223}<110> to random X-ray diffraction strength is 3 or more and the average ratio of the X-ray strength in three orientation components of {S54}<225>, {111}<112> and {111}<110> to random X-ray diffraction strength is 3.5 or less, the arithmetic average of roughness Ra of at least one of its surfaces is 1 to 3.5 μm , and the surfaces of the steel sheet are covered with a composition having a lubricating effect; and further characterized in that at least one of the friction coefficients in the rolling direction and in the direction perpendicular to the rolling direction at 0 to 200°C is 0.05 to 0.2. As a consequence, in the evaluations by the methods according to the present invention, the indices of the shape fixation property of these steels were superior to those of conventional steels.

[0164] All the steel sheets in the tables other than those mentioned above were outside the ranges of the present invention for the following reasons.

[0165] In steel A-2, since the finish rolling termination temperature (FT) and the total reduction ratio in the temperature

range of the Ar_3 transformation temperature + 100°C or lower were outside their respective ranges of the present invention, the envisaged texture specified in claim 1 was not obtained and, as a consequence, a sufficient shape fixation property ($\Delta d/\sigma B$) was not obtained. In steel A-5, since a composition having a lubricating effect was not applied, the envisaged friction coefficient was not obtained and, as a consequence, a sufficient drawability (D/d) was not obtained.

5 In steel A-6, since the arithmetic average of roughness R_a was outside the range specified in claim 1 of the present invention, the envisaged friction coefficient was not obtained and, as a consequence, a sufficient drawability (D/d) was not obtained. In steel A-7, since the heat treatment temperature (ST) was outside the range of the present invention, the envisaged texture specified in claim 1 was not formed and, as a consequence, a sufficient shape fixation property ($\Delta d/\sigma B$) was not obtained. In steel A-9, since the cold reduction ratio was outside the range of the present invention, the envisaged texture was not obtained and, as a consequence, a sufficient shape fixation property ($\Delta d/\sigma B$) was not obtained.

10 **[0166]** In steel B, the content of C was outside the range of the present invention and, as a consequence, a sufficient strength (σB) was not obtained. In steel G, the content of S was outside the range of the present invention and, as a consequence, neither a sufficient hole expansion ratio (λ) nor a good elongation (E1) was obtained.

Table 3

Steel	Chemical composition (in mass %)											Remarks
	C	Si	Mn	P	S	Al	N	Ti	Nb	Ti*	Others	
A	0.035	0.95	1.35	0.005	0.0008	0.031	0.0013	0.147	-	0.001	B:0.0005, Ca:0.0012	Invented steel
B	0.002	0.61	0.41	0.084	0.0010	0.015	0.0011	0.055	-	0.042		Comparative steel
C	0.055	0.61	1.45	0.005	0.0011	0.035	0.0012	0.181	0.095	0.004	REM:0.0008	Invented steel
D	0.025	0.88	0.95	0.008	0.0007	0.024	0.0016	0.110	0.027	0.017	Cu:1.15, N1:0.48	Invented steel
E	0.033	1.61	0.42	0.007	0.0011	0.022	0.0018	0.133	0.036	0.012	Mo:0.08	Invented steel
F	0.027	0.18	2.43	0.007	0.0012	0.031	0.0015	0.126	-	0.011	Cr:0.5	Invented steel
G	0.037	0.89	1.41	0.003	0.0401	0.022	0.0022	0.121	0.031	-0.079		Comparative steel
H	0.024	0.91	0.45	0.011	0.0009	0.031	0.0019	0.125	-	0.021	Zr:0.03	Invented steel
I	0.030	0.88	0.71	0.005	0.0008	0.036	0.0021	0.119	0.045	0.014	V:0.032	Invented steel

[0167] Underlined values are outside the range of the invented steel.

5

10

15

20

25

30

35

40

45

50

55

Table 4-1

		Production conditions											
		Hot rolling process							Cold rolling and annealing processes				
		Steel	Classification	SRT (°C)	FT (°C)	Ar3+100 (°C)	Reduction ratio (%)	Lubrication	CT (°C)	TO (°C)	Cold reduction ratio (%)	ST (°C)	Ac3+10 (°C)
A-1	Hot-rolled	1230	890	915	42	Not applied	500	798	-	-	-	-	-
A-2	Hot-rolled	1230	920	915	0	Not applied	550	798	-	-	-	-	-
A-3	Hot-rolled	1230	890	915	42	Not applied	700	798	-	-	-	-	-
A-4	Hot-rolled	1230	890	915	42	Applied	500	798	-	-	-	-	-
A-5	Hot-rolled	1230	890	915	42	Applied	500	798	-	-	-	-	-
A-6	Hot-rolled	1230	890	915	42	Not applied	500	798	-	-	-	-	-
A-7	Cold-rolled	1230	890	915	42	Not applied	500	798	-	-	-	-	-
A-8	Cold-rolled	1230	880	-	-	Applied	-	-	74	820	1049	90	90
A-9	Cold-rolled	1230	880	-	-	Applied	-	-	81	820	1049	60	60
A-10	Cold-rolled	1230	880	-	-	Not applied	-	-	74	820	1049	60	60
B	Hot-rolled	1180	890	992	71	Not applied	600	869	-	-	-	-	-
C	Hot-rolled	1180	860	892	42	Not applied	600	782	-	-	-	-	-
D	Hot-rolled	1180	880	943	71	Not applied	400	810	-	-	-	-	-
E	Hot-rolled	1180	910	1006	71	Applied	650	840	-	-	-	-	-
F	Hot-rolled	1180	800	812	30	Applied	550	739	-	-	-	-	-
G	Hot-rolled	1180	860	908	42	Applied	500	794	-	-	-	-	-
H	Hot-rolled	1180	890	989	71	Applied	600	851	-	-	-	-	-
I	Hot-rolled	1180	900	966	71	Applied	650	833	-	-	-	-	-

[0168] Underlined values are outside range of the invented steel.

Table 4-2

		Ratios of X-ray strength to random X-ray diffraction strength		Surface condition		
Steel	Classification	Strength ratio 1	Strength ratio 2	Ra (μm)	Lubrication coating	Friction coefficient
A-1	Hot-rolled	6.8	1.9	2.2	Applied	0.08
A-2	Hot-rolled	1.8	1.7	2.3	Not applied	0.21
A-3	Hot-rolled	7.1	1.8	2.0	Applied	0.11
A-4	Hot-rolled	7.7	1.3	1.9	Applied	0.07
A-5	Hot-rolled	7.8	1.4	1.6	Not applied	0.21
A-6	Hot-rolled	7.8	1.3	<u>3.6</u>	Applied	0.22
A-7	Cold-rolled	<u>1.6</u>	2.5	0.5	Not applied	0.19
A-8	Cold-rolled	5.1	2.2	0.6	Applied	0.07
A-9	Cold-rolled	<u>2.7</u>	<u>4.3</u>	0.5	Applied	0.07
A-10	Cold-rolled	4.6	2.4	0.5	Applied	0.08
B	Hot-rolled	<u>1.2</u>	<u>6.6</u>	2.1	Not applied	0.23
C	Hot-rolled	5.9	2.1	2.3	Applied	0.12
D	Hot-rolled	7.2	2.1	2.0	Applied	0.08
E	Hot-rolled	8.3	1.5	1.7	Applied	0.12
F	Hot-rolled	4.4	2.2	1.6	Applied	0.09
G	Hot-rolled	<u>1.8</u>	<u>4.6</u>	1.6	Not applied	0.21
H	Hot-rolled	11.0	1.6	1.9	Applied	0.08
I	Hot-rolled	6.7	2.0	1.3	Applied	0.09

[0169] Underlined values are outside range of the invented steel.

Table 4-3

		Mechanical properties				Shape fixation property index	Drawability index	
Steel	Classification	σ_Y (MPa)	σ_B (MPa)	EI (%)	λ (%)	$\Delta d/\sigma_B^*$ (mm/MPa)	d/D	Remarks
A-1	Hot-rolled	588	779	22	94	42	2.10	Invented steel
A-2	Hot-rolled	603	811	20	106	68	1.86	Comparative steel
A-3	Hot-rolled	523	718	19	78	39	1.96	Invented steel
A-4	Hot-rolled	576	791	22	90	40	1.99	Invented steel
A-5	Hot-rolled	567	784	20	87	44	1.79	Comparative steel
A-6	Hot-rolled	581	795	21	86	42	1.82	Comparative steel

(continued)

		Mechanical properties				Shape fixation property index	Drawability index	
Steel	Classification	σ_Y (MPa)	σ_B (MPa)	El (%)	λ (%)	$\Delta d/\sigma_B^*$ (mm/MPa)	d/D	Remarks
A-7	Cold-rolled	733	840	14	35	59	1.90	Comparative steel
A-8	Cold-rolled	594	800	20	78	45	2.19	Invented steel
A-9	Cold-rolled	586	790	20	76	63	2.01	Comparative steel
A-10	Cold-rolled	559	810	19	94	44	2.15	Invented steel
B	Hot-rolled	293	427	40	138	55	1.88	Comparative steel
C	Hot-rolled	603	796	21	80	38	1.91	Invented steel
D	Hot-rolled	580	785	23	106	39	2.20	Invented steel
E	Hot-rolled	520	77.5	24	111	42	1.98	Invented steel
F	Hot-rolled	603	834	20	76	40	2.03	Invented steel
G	Hot-rolled	558	781	18	28	52	1.92	Comparative steel
H	Hot-rolled	480	634	26	134	44	2.14	Invented steel
I	Hot-rolled	477	676	25	125	45	2.06	Invented steel
*: $\times 1000$								

[0170] As has been explained in detail, the present invention relates to a high-strength thin steel drawable and excellent in a shape fixation property and a method of producing the steel sheet. By using the high-strength thin steel sheet, a good drawability is realized even with a steel sheet having a texture disadvantageous for drawing work, and both a good shape fixation property and a high drawability can be realized at the same time. For this reason, the present invention is highly valuable industrially.

Claims

1. A high-strength thin steel sheet drawable and excellent in a shape fixation property, **characterized by** containing, in mass,

C : 0.01 to 0.3%,
Si: 0.01 to 2%,
Mn: 0.05 to 3%,
P: 0. 1% or less,
S: 0.01% or less,
Al: 0.005 to 1%,

optionally containing one or two of,

Ti: 0.05 to 0.5%,
Nb: 0.01 to 0.5%,

and further optionally containing at least one or more of,

B : 0.0002 to 0.002%

Cu: 0.2 to 2%,

Ni : 0.1 to 1%,

Ca: 0.0005 to 0.002%,

REM: 0.0005 to 0.02%,

Mo: 0.05 to 1%,

V : 0.02 to 0.2%,

Cr: 0.01 , to 1%,

Zr: 0.02 to 0.2%, optionally one or more selected from Sn, Co, Zn, W and Mg by 1% or less in total and

the balance being Fe and unavoidable impurities, and at least on a plane at the center of the thickness of a steel sheet, the average ratio of the X-ray strength in the orientation component group of {100} <011> to {223} <110> to random X-ray diffraction strength is 3 or more and the average ratio of the X-ray strength in three orientation components of {554} <225>, {111} <112> and {111} <110> to random X-ray diffraction strength is below 2.5, the arithmetic average of the roughness Ra of at least one of the surfaces of the steel sheet is 1 to 3.5 μm , the surfaces of the steel sheet are covered with a composition having a lubricating effect, and the lubricated surfaces of the steel sheet have a friction coefficient at 0 to 200 °C of 0.05 to 0.2.

2. A high-strength thin steel sheet drawable and excellent in a shape fixation property, according to claim 1, wherein the steel sheet contains in mass,

C : 0.01 to 0.1%,

N : 0.005% or less,

Ti : 0.05 to 0.5%,

optionally

Nb : 0.01 to 0.5%, and satisfies the expression of;

$$\text{Ti} + (48/93)\text{Nb} - 48/12\text{C} - 48/14\text{N} - 48/32\text{S} \geq 0.4$$

3. A high-strength thin steel sheet drawable and excellent in a shape fixation property according to claim 1 or 2, **characterized in that** the microstructure of the steel sheet is a compound structure containing ferrite as the phase accounting for the largest volume percentage and martensite mainly as the second phase.
4. A high-strength thin steel sheet drawable and excellent in a shape fixation property according to claim 1 or 2, **characterized in that** the microstructure of the steel sheet is a compound structure containing retained austenite by 5 to 25% in terms of volume percentage and having the balance mainly consisting of ferrite and bainite.
5. A high-strength thin steel sheet drawable and excellent in a shape fixation property according to claim 1 or 2, **characterized in that** the microstructure of the steel sheet is a compound structure containing bainite, or ferrite and bainite as the phase accounting for the largest volume percentage.
6. A high-strength thin steel sheet drawable and excellent in a shape fixation property according to claim 1 or 2, **characterized by** having a zinc plating layer between the steel sheet and a composition having a lubricating effect.
7. A method for producing a high-strength thin steel sheet drawable and excellent in a shape fixation property, according to claim 1, **characterized by** in a hot rolling process for obtaining a high strength thin steel sheet having the chemical components, subjecting a slab having said chemical components to rough rolling and, then, to finish rolling at a total reduction ratio of 25% or more in terms of steel sheet thickness in the temperature range of the Ar_3 transformation temperature +100°C or lower with the temperature at the final pass of the finish rolling equal to or above the Ar_3 transformation temperature; retaining the hot-rolled steel sheet thus produced for 1 to 20 sec in the temperature range from Ar_1 transformation temperature to the Ar_3 transformation temperature, then, cooling it at a cooling rate of 20°C/sec or more to a coiling temperature and, coiling the hot-rolled steel sheet thus produced, and thereafter, applying a composition having a lubricating effect to the surfaces of the steel sheet.

8. A method for producing a high-strength thin steel sheet drawable and excellent in a shape fixation property according to claim 7, the method comprising the steps of,
in a hot rolling process for obtaining a high strength thin steel sheet having the chemical components, according to claim 1, subjecting a slab having said chemical components to rough rolling and, then, to finish rolling at a total reduction ratio of 25% or more in terms of steel sheet thickness in the temperature range of the Ar_3 transformation temperature + 100°C or lower with the temperature at the final pass of the finish rolling equal to or above the Ar_3 transformation temperature, retaining the hot-rolled steel sheet thus produced for 1 to 20 sec. in the temperature range from Ar_1 transformation temperature to the Ar_3 transformation temperature, then, cooling it at a cooling rate of 20°C/sec or more, and coiling it at a coiling temperature of 350°C or lower,
and thereafter, applying a composition having a lubricating effect to the surfaces of the steel sheet.

9. A method for producing a high-strength thin steel sheet drawable and excellent in a shape fixation property, according to claim 7, the method comprising the steps of
in a hot rolling process for obtaining a high strength thin steel sheet having the chemical components according to claim 1, subjecting a slab having said chemical components to rough rolling and, then, to finish rolling at a total reduction ratio of 25% or more in terms of steel sheet thickness in the temperature range of the Ar_3 transformation temperature + 100°C or lower with the temperature at the final pass of the finish rolling equal to or above the Ar_3 transformation temperature, retaining, the hot-roller steel sheet thus produced for 1 to 20 sec. in the temperature range from Ar_1 transformation temperature to the Ar_3 transformation temperature, then, cooling it at a cooling rate of 20°C/sec or more, and coiling it at a coiling temperature in the range from over 350°C to below 450°C,
and thereafter, applying a composition having a lubricating effect to the surfaces of the steel sheet.

10. A method for producing a high-strength thin steel, sheet drawable and excellent in a shape fixation property, according to claim 7, the method comprising the steps of,
in a hot rolling process for obtaining a high strength thin sheet having the chemical components, according to claim 1, subjecting a slab having said chemical components to rough rolling and, then, to finish rolling at a total reduction ratio of 25% or more in terms of steel sheet thickness in the temperature range of the Ar_3 transformation temperature + 100°C or lower with the temperature at the final pass of the finish rolling equal to or above the Ar_3 transformation temperature, retaining the hot-rolled steel sheet thus produced for 1 to 20 sec. in the temperature range from Ar_1 transformation temperature to the Ar_3 transformation temperature, then, cooling it at a cooling rate of 20°C/sec or more, and coiling it at a coiling temperature of 450°C or more,
and thereafter, applying a composition having a lubricating effect to the surfaces of the steel sheet.

11. A method for producing a high-strength thin steel sheet drawable and excellent in a shape fixation property according to any one of claims 7 to 10, **characterized by:** in a hot rolling process, applying lubrication rolling to the finish rolling after the rough rolling.

12. A method for producing a high-strength thin steel sheet drawable and excellent in a shape fixation property according to any one of claims 7 to 11, **characterized by:** in a hot rolling process, applying descaling after the completion of the rough rolling.

13. A method for producing a high-strength thin steel sheet drawable and excellent in a shape fixation property according to claim 1, the method comprising the steps of,
in producing a high-strength thin steel sheet having the chemical components according to claim 1, subjecting a slab having said chemical components to, sequentially, hot rolling, pickling, cold rolling at a reduction ratio below 80% in terms of steel sheet thickness, and then applying a heat treatment comprising the processes of retaining the cold-rolled steel sheet for 5 to 150 sec. in the temperature range from the Ac_1 transformation temperature to the Ac_3 transformation temperature + 100°C and then cooling it at a cooling rate of 20°C/sec. or more to the temperature range of 350°C or lower; and thereafter, applying a composition having a lubricating effect to the surfaces of the steel sheet.

14. A method for producing a high-strength thin steel sheet drawable and excellent in a shape fixation property according to claim 1, the method comprising the steps of,
in producing a high-strength thin steel sheet having the chemical components according to claim 1, subjecting a slab having said chemical components to, sequentially, hot rolling, pickling, cold rolling at a reduction ratio below 80% in terms of steel sheet thickness, and then
applying a heat treatment comprising the processes of retaining the cold-rolled steel sheet for 5 to 150 sec. in the temperature range from the Ac_1 transformation temperature to the Ac_3 transformation temperature + 100°C, cooling

it at a cooling rate of 20°C/sec. or more to the temperature range from above 350°C to below 450°C, retaining it again in this temperature range for 5 to 600 sec., and then cooling it again at a cooling rate of 5°C/sec. or more to the temperature range of 200°C or lower;
and, thereafter, applying a composition having a lubricating effect to the surfaces, of the steel sheet.

15. A method for producing a high-strength thin steel sheet drawable and excellent in a shape fixation property according to claim 1, the method comprising the steps of,
in producing a high-strength thin steel sheet having the chemical components according to claim 1, subjecting a slab having said chemical components to, sequentially, hot rolling, pickling, cold rolling at a reduction ratio below 80% in terms of steel sheet thickness, and then applying a heat treatment comprising the processes of retaining the cold-rolled steel sheet for 5 to 150 sec. in the temperature range from the Ac_1 transformation temperature to the Ac_3 transformation temperature + 100°C, cooling it, at a cooling rate of 20°C/sec or more to the temperature range from above 350°C not higher than a temperature TO ,
and then cooling it again at a cooling rate of below 20°C/sec to the temperature range of 200°C or lower;
and, thereafter, applying a composition having a lubricating effect to the surfaces of the steel sheet, wherein the temperature TO is specified by the equation:

$$TO = -650.4 \times \%C + B,$$

where, B is determined as follows:

$$B = -50.6 \times M_{neq} + 894.3,$$

where, M_{neq} is determined from the mass percentages of the component elements of the steel sheet:

$$M_{neq} = \%Mn + 0.24 \times \%Ni + 0.13 \times \%Si + 0.38 \times \%Mo + 0.55 \times \%Cr + 0.16 \times \%Cu - 0.50 \times \%Al - 0.45 \times \%Co + 0.90 \times \%V.$$

16. A method of producing a high-strength thin steel sheet drawable and excellent in a shape fixation property according to any one of claim 7 to 12, **characterized by:**

galvanizing the surfaces of the steel sheet by dipping the steel sheet in a zinc plating bath after hot rolling; and, thereafter, applying a composition having a lubricating effect to the surfaces of the steel sheet.

17. A method of producing a high-strength thin steel sheet drawable and excellent in a shape fixation property according to any one of claim 13 to 16, **characterized by:**

galvanizing the surfaces of the steel sheet by dipping the steel sheet in a zinc plating bath after the completion of the heat treatment processes; and, thereafter, applying a composition having a lubricating effect to the surfaces of the steel sheet.

18. A method of producing a high-strength thin steel sheet drawable and excellent in a shape fixation property, **characterized by:** subjecting a steel sheet to an alloying treatment after the galvanizing by dipping the steel sheet in a zinc plating bath according to claim 16 or 17, and, thereafter, applying a composition having a lubricating effect to the surfaces of the steel sheet.

Patentansprüche

1. Hochfestes Stahldünnsblech mit Ziehbarkeit und ausgezeichneter Formhaltigkeit, **dadurch gekennzeichnet, daß**

es massebezogen enthält:

C: 0,01 bis 0,3 %,
Si: 0,01 bis 2 %,
Mn: 0,05 bis 3 %,
P: höchstens 0,1 %,
S: höchstens 0,01 %,
Al: 0,005 bis 1 %, optional
Ti: 0,05 bis 0,5 % und/oder
Nb: 0,01 bis 0,5 %, optional

und das ferner optional enthält:

B: 0,0002 bis 0,002 %,
Cu: 0,2 bis 2 %,
Ni: 0,1 bis 1 %,
Ca: 0,0005 bis 0,002 %, SEM: 0,0005 bis 0,02 %,
Mo: 0,05 bis 1 %, V: 0,02 bis 0,2 %, Cr: 0,01 bis 1 % und/oder
Zr: 0,02 bis 0,2 %, optional

optional Sn, Co, Zn, W und/oder Mg von insgesamt 1% oder weniger und wobei der Rest Fe und unvermeidliche Verunreinigungen sind und mindestens auf einer Ebene in Dickenmitte eines Stahlblechs das mittlere Verhältnis der Röntgenintensität in der Orientierungskomponentengruppe {100}<011> bis {223}<110> zur zufälligen Röntgenbeugungsintensität mindestens 3 beträgt und das mittlere Verhältnis der Röntgenintensität in drei Orientierungskomponenten {554}<225>, {111}<112> und {111}<110> zur zufälligen Röntgenbeugungsintensität weniger als 2,5 beträgt, der arithmetische Mittenrauhwert Ra mindestens einer der Oberflächen des Stahlblechs 1 bis 3,5 µm beträgt, die Oberflächen des Stahlblechs mit einer Zusammensetzung mit Schmierwirkung bedeckt sind und die geschmierten Oberflächen des Stahlblechs einen Reibungskoeffizienten bei 0 bis 200 °C von 0,05 bis 0,2 haben.

2. Hochfestes Stahldünnblech mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 1, wobei das Stahlblech massebezogen enthält:

C: 0,01 bis 0,1 %, N: höchstens 0,005 %, Ti: 0,05 bis 0,5 % optional
Nb: 0,01 bis 0,5 % und den folgenden Ausdruck erfüllt:

$$\frac{\text{Ti}}{48} + \frac{(48/93) \text{ Nb}}{93} - \frac{48}{12} \text{ C} - \frac{48}{14} \text{ N} - \frac{48}{32} \text{ S} \geq 0 \text{ \%}$$

3. Hochfestes Stahldünnblech mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 1 oder 2, **dadurch gekennzeichnet, daß** die Mikrostruktur des Stahlblechs eine Verbundstruktur ist, die Ferrit als Phase mit dem größten Volumenprozentsatz und Martensit hauptsächlich als zweite Phase enthält.

4. Hochfestes Stahldünnblech mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 1 oder 2, **dadurch gekennzeichnet, daß** die Mikrostruktur des Stahlblechs eine Verbundstruktur ist, die Restaustenit mit 5 bis 25 Vol.-% enthält und in der der Rest hauptsächlich aus Ferrit und Bainit besteht.

5. Hochfestes Stahldünnblech mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 1 oder 2, **dadurch**

gekennzeichnet, daß die Mikrostruktur des Stahlblechs eine Verbundstruktur ist, die Bainit oder Ferrit und Bainit als Phase mit dem größten Volumenprozentsatz enthält.

6. Hochfestes Stahldünnsblech mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 1 oder 2, **dadurch gekennzeichnet, daß** es eine Zinkplattierungsschicht zwischen dem Stahlblech und einer Zusammensetzung mit Schmierwirkung hat.

7. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 1, **gekennzeichnet durch:** in einem Warmwalzverfahren zum Erhalten eines hochfesten Stahldünnsblechs mit den chemischen Komponenten erfolgendes Vorwalzen einer Bramme mit den chemischen Komponenten und anschließendes Fertigwalzen mit einem stahlblechdickenbezogenen Gesamtabnahmeverhältnis von mindestens 25 % im Temperaturbereich von höchstens der Ar_3 -Umwandlungstemperatur + 100 °C, wobei die Temperatur am letzten Durchgang des Fertigwalzens gleich oder höher als die Ar_3 -Umwandlungstemperatur ist; 1- bis 20-sekündiges Halten des so hergestellten warmgewalzten Stahlblechs im Temperaturbereich von der Ar_1 -Umwandlungstemperatur bis zur Ar_3 -Umwandlungstemperatur, gefolgt von Abkühlen mit einer Abkühlungsgeschwindigkeit von mindestens 20 °C/s auf eine Wickeltemperatur; und Wickeln des so hergestellten warmgewalzten Stahlblechs und anschließendes Auftragen einer Zusammensetzung mit Schmierwirkung auf die Oberflächen des Stahlblechs.

8. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 7, wobei das Verfahren die folgenden Schritte aufweist:

in einem Warmwalzverfahren zum Erhalten eines hochfesten Stahldünnsblechs mit den chemischen Komponenten nach Anspruch 1 erfolgendes Vorwalzen einer Bramme mit den chemischen Komponenten und anschließendes Fertigwalzen mit einem stahlblechdickenbezogenen Gesamtabnahmeverhältnis von mindestens 25 % im Temperaturbereich von höchstens der Ar_3 -Umwandlungstemperatur + 100 °C, wobei die Temperatur am letzten Durchgang des Fertigwalzens gleich oder höher als die Ar_3 -Umwandlungstemperatur ist; 1- bis 20-sekündiges Halten des so hergestellten warmgewalzten Stahlblechs im Temperaturbereich von der Ar_1 -Umwandlungstemperatur bis zur Ar_3 -Umwandlungstemperatur, gefolgt von Abkühlen mit einer Abkühlungsgeschwindigkeit von mindestens 20 °C/s und Wickeln mit einer Wickeltemperatur von höchstens 350 °C, und anschließendes Auftragen einer Zusammensetzung mit Schmierwirkung auf die Oberflächen des Stahlblechs.

9. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 7, wobei das Verfahren die folgenden Schritte aufweist:

in einem Warmwalzverfahren zum Erhalten eines hochfesten Stahldünnsblechs mit den chemischen Komponenten nach Anspruch 1 erfolgendes Vorwalzen einer Bramme mit den chemischen Komponenten und anschließendes Fertigwalzen mit einem stahlblechdickenbezogenen Gesamtabnahmeverhältnis von mindestens 25 % im Temperaturbereich von höchstens der Ar_3 -Umwandlungstemperatur + 100 °C, wobei die Temperatur am letzten Durchgang des Fertigwalzens gleich oder höher als die Ar_3 -Umwandlungstemperatur ist; 1- bis 20-sekündiges Halten des so hergestellten warmgewalzten Stahlblechs im Temperaturbereich von der Ar_1 -Umwandlungstemperatur bis zur Ar_3 -Umwandlungstemperatur, gefolgt von Abkühlen mit einer Abkühlungsgeschwindigkeit von mindestens 20 °C/s und Wickeln mit einer Wickeltemperatur im Bereich von über 350 °C bis unter 450 °C, und anschließendes Auftragen einer Zusammensetzung mit Schmierwirkung auf die Oberflächen des Stahlblechs.

10. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 7, wobei das Verfahren die folgenden Schritte aufweist:

in einem Warmwalzverfahren zum Erhalten eines hochfesten Stahldünnsblechs mit den chemischen Komponenten nach Anspruch 1 erfolgendes Vorwalzen einer Bramme mit den chemischen Komponenten und anschließendes Fertigwalzen mit einem stahlblechdickenbezogenen Gesamtabnahmeverhältnis von mindestens 25 % im Temperaturbereich von höchstens der Ar_3 -Umwandlungstemperatur + 100 °C, wobei die Temperatur am letzten Durchgang des Fertigwalzens gleich oder höher als die Ar_3 -Umwandlungstemperatur ist; 1- bis 20-sekündiges Halten des so hergestellten warmgewalzten Stahlblechs im Temperaturbereich von der Ar_1 -Umwandlungstemperatur bis zur Ar_3 -Umwandlungstemperatur, gefolgt von Abkühlen mit einer Abkühlungsgeschwindigkeit von mindestens 20 °C/s und Wickeln mit einer Wickeltemperatur von mindestens 450 °C,

und anschließendes Auftragen einer Zusammensetzung mit Schmierwirkung auf die Oberflächen des Stahlblechs.

11. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach einem der Ansprüche 7 bis 10, **gekennzeichnet durch**: in einem Warmwalzverfahren erfolgreiches Anwenden von Schmierungswalzen auf das Fertigwalzen nach dem Vorwalzen.

12. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach einem der Ansprüche 7 bis 11, **gekennzeichnet durch**: in einem Warmwalzverfahren erfolgreiches Anwenden von Entzundern nach Abschluß des Vorwalzens.

13. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 1, wobei das Verfahren die folgenden Schritte aufweist:

beim Herstellen eines hochfesten Stahldünnsblechs mit den chemischen Komponenten nach Anspruch 1 nacheinander erfolgreiches Warmwalzen einer Bramme mit den chemischen Komponenten, Beizen, Kaltwalzen mit einem stahlblechdickenbezogenen Abnahmeverhältnis unter 80 % und anschließendes Anwenden einer Wärmebehandlung mit den Verfahren des 5- bis 150-sekündigen Haltens des kaltgewalzten Stahlblechs im Temperaturbereich von der A_{c1} -Umwandlungstemperatur bis zur A_{c3} -Umwandlungstemperatur + 100 °C, gefolgt von Abkühlen mit einer Abkühlungsgeschwindigkeit von mindestens 20 °C/s auf den Temperaturbereich von höchstens 350 °C; und anschließendes Auftragen einer Zusammensetzung mit Schmierwirkung auf die Oberflächen des Stahlblechs.

14. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 1, wobei das Verfahren die folgenden Schritte aufweist:

beim Herstellen eines hochfesten Stahldünnsblechs mit den chemischen Komponenten nach Anspruch 1 nacheinander erfolgreiches Warmwalzen einer Bramme mit den chemischen Komponenten, Beizen, Kaltwalzen mit einem stahlblechdickenbezogenen Abnahmeverhältnis unter 80 % und anschließendes Anwenden einer Wärmebehandlung mit den Verfahren: 5- bis 150-sekündiges Halten des kaltgewalzten Stahlblechs im Temperaturbereich von der A_{c1} -Umwandlungstemperatur bis zur A_{c3} -Umwandlungstemperatur + 100 °C, Abkühlen mit einer Abkühlungsgeschwindigkeit von mindestens 20 °C/s auf den Temperaturbereich von über 350 °C bis unter 450 °C, erneutes 5- bis 600-sekündiges Halten in diesem Temperaturbereich, gefolgt von erneutem Abkühlen mit einer Abkühlungsgeschwindigkeit von mindestens 5 °C/s auf den Temperaturbereich von höchstens 200 °C; und anschließendes Auftragen einer Zusammensetzung mit Schmierwirkung auf die Oberflächen des Stahlblechs.

15. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach Anspruch 1, wobei das Verfahren die folgenden Schritte aufweist:

beim Herstellen eines hochfesten Stahldünnsblechs mit den chemischen Komponenten nach Anspruch 1 nacheinander erfolgreiches Warmwalzen einer Bramme mit den chemischen Komponenten, Beizen, Kaltwalzen mit einem stahlblechdickenbezogenen Abnahmeverhältnis unter 80 % und anschließendes Anwenden einer Wärmebehandlung mit den Verfahren: 5- bis 150-sekündiges Halten des kaltgewalzten Stahlblechs im Temperaturbereich von der A_{c1} -Umwandlungstemperatur bis zur A_{c3} -Umwandlungstemperatur + 100 °C, Abkühlen mit einer Abkühlungsgeschwindigkeit von mindestens 20 °C/s auf den Temperaturbereich von über 350 °C bis höchstens einer Temperatur T_0 , gefolgt von erneutem Abkühlen mit einer Abkühlungsgeschwindigkeit unter 20 °C/s auf den Temperaturbereich von höchstens 200 °C; und anschließendes Auftragen einer Zusammensetzung mit Schmierwirkung auf die Oberflächen des Stahlblechs, wobei die Temperatur T_0 durch folgende Gleichung festgelegt ist:

$$T_0 = -650,4 \times \%C + B,$$

wobei B wie folgt bestimmt wird:

$$B = -50,6 \times M_{neq} + 894,3,$$

wobei M_{neq} anhand der Masseprozentätze der Komponentenelemente des Stahlblechs bestimmt wird:

$$M_{neq} = \%Mn + 0,24 \times \%Ni + 0,13 \times \%Si + 0,38 \times \%Mo + 0,55 \times \%Cr + 0,16 \times \%Cu - 0,50 \times \%Al - 0,45 \times \%Co + 0,90 \times \%V.$$

16. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach einem der Ansprüche 7 bis 12, **gekennzeichnet durch**: Galvanisieren der Oberflächen des Stahlblechs **durch** Tauchen des Stahlblechs in ein Zinkplattierungsbad nach Warmwalzen; und anschließendes Auftragen einer Zusammensetzung mit Schmierwirkung auf die Oberflächen des Stahlblechs.
17. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit nach einem der Ansprüche 13 bis 16, **gekennzeichnet durch**: Galvanisieren der Oberflächen des Stahlblechs **durch** Tauchen des Stahlblechs in ein Zinkplattierungsbad nach Abschluß der Wärmebehandlungsverfahren; und anschließendes Auftragen einer Zusammensetzung mit Schmierwirkung auf die Oberflächen des Stahlblechs.
18. Verfahren zur Herstellung eines hochfesten Stahldünnsblechs mit Ziehbarkeit und ausgezeichneter Formhaltigkeit, **gekennzeichnet durch**: Einwirkenlassen einer Legierungsbehandlung auf ein Stahlblech nach dem Galvanisieren **durch** Tauchen des Stahlblechs in ein Zinkplattierungsbad nach Anspruch 16 oder 17 und anschließendes Auftragen einer Zusammensetzung mit Schmierwirkung auf die Oberflächen des Stahlblechs.

Revendications

1. Tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, **caractérisée en ce qu'elle** contient, en masse,
- C : 0,01 à 0,3 %,
 Si : 0,01 à 2 %,
 Mn : 0,05 à 3 %,
 P : 0,1 % ou moins,
 S : 0,01 % ou moins,
 Al : 0,005 % à 1 %, contenant facultativement un ou deux parmi Ti : 0,05 à 0,5 %, Nb : 0,01 à 0,5 %, et contenant en outre facultativement au moins un ou plusieurs parmi, B : 0,0002 à 0,002 %, Cu : 0,2 à 2 %, Ni : 0,1 à 1 %, Ca : 0,0005 à 0,002 %, REM : 0,0005 à 0,02 %, Mo : 0,05 à 1 %, V : 0,02 à 0,2 %, Cr : 0,01 à 1 %, Zr : 0,02 à 0,2 % facultativement un ou plusieurs parmi Sn, Co, Zn, W et Mg de, en total, 1% ou moins, et le reste étant du Fe et des impuretés inévitables, et au moins sur un plan au centre de l'épaisseur d'une tôle d'acier, le rapport moyen de l'intensité des rayons X dans le groupe de composante d'orientation de {100} <011> à {223} <110> sur l'intensité de diffraction aux rayons X aléatoires vaut 3 ou plus et le rapport moyen de l'intensité des rayons X dans trois composantes d'orientation de {554} <225>, {111} <112> et {111} <110> sur l'intensité de diffraction aux rayons X aléatoires est en dessous de 2,5, la moyenne arithmétique de la rugosité Ra d'au moins l'une des surfaces de la tôle d'acier est de 1 à 3,5 µm, les surfaces de la tôle d'acier sont recouvertes d'une

composition ayant un effet lubrifiant, et les surfaces lubrifiées de la tôle d'acier ont un coefficient de frottement à 0 à 200 °C de 0,05 à 0,2.

2. Tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme selon la revendication 1, dans laquelle la tôle d'acier contient, en masse,
 C : 0,01 à 0,1 %,
 N : 0,005 % ou moins,
 Ti : 0,05 à 0,5 %, facultativement
 Nb : 0,01 à 0,5 %, et satisfait à l'expression de

$$Ti + (48/93)Nb - 48/12C - 48/14N - 48/32S \geq 0 \text{ \%}.$$

3. Tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme selon la revendication 1 ou 2, **caractérisée en ce que** la microstructure de la tôle d'acier est une structure composée contenant de la ferrite en tant que phase constituant le plus grand pourcentage en volume et de la martensite principalement en tant que seconde phase.
4. Tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme selon la revendication 1 ou 2, **caractérisée en ce que** la microstructure de la tôle d'acier est une structure composée contenant de l'austénite résiduelle à hauteur de 5 à 25 % en termes de pourcentage en volume et dont le reste contient principalement de la ferrite et de la bainite.
5. Tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme selon la revendication 1 ou 2, **caractérisée en ce que** la microstructure de la tôle d'acier est une structure composée contenant de la bainite, ou de la ferrite et de la bainite, en tant que la phase constituant le plus grand pourcentage en volume.
6. Tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme selon la revendication 1 ou 2, **caractérisée en ce qu'elle a** une couche de placage de zinc entre la tôle d'acier et une composition ayant un effet lubrifiant.
7. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, selon la revendication 1, **caractérisé par** : dans un procédé de laminage à chaud destiné à obtenir une tôle mince d'acier de haute résistance mécanique ayant les composants chimiques, la soumission d'une ébauche ayant lesdits composants chimiques à un laminage grossier, puis à un laminage de finition à un rapport total de réduction de 25 % ou plus en termes d'épaisseur de tôle d'acier dans la gamme de température de la température de transformation $Ar_3 + 100$ °C ou inférieure avec la température de la passe finale du cylindre finisseur égale ou supérieure à la température de transformation Ar_3 ; le maintien de la tôle d'acier laminée à chaud ainsi produite pendant 1 à 20 s dans la gamme de température de la température de transformation Ar_1 à la température de transformation Ar_3 , puis son refroidissement à une vitesse de refroidissement de 20 °C/s ou plus jusqu'à une température de cintrage, et le cintrage de la tôle d'acier laminée à chaud ainsi produite, et, par la suite, l'application d'une composition ayant un effet lubrifiant aux surfaces de la tôle d'acier.
8. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme selon la revendication 7, le procédé comprenant les étapes consistant à, dans un procédé de laminage à chaud destiné à obtenir une tôle mince d'acier de haute résistance mécanique ayant les composants chimiques selon la revendication 1, soumettre une ébauche ayant lesdits composants chimiques à un laminage grossier, puis à un laminage de finition à un rapport total de réduction de 25 % ou plus en termes d'épaisseur de tôle d'acier dans la gamme de température de la température de transformation $Ar_3 + 100$ °C ou inférieure avec la température de la passe finale du cylindre finisseur égale ou supérieure à la température de transformation Ar_3 , retenir la tôle d'acier laminée à chaud ainsi produite pendant 1 à 20 s dans la gamme de température de la température de transformation Ar_1 , à la température de transformation Ar_3 , puis, la refroidir à une vitesse de refroidissement de 20 °C/s ou plus, et la cintrer à une température de cintrage de 350 °C ou inférieure, et par la suite, appliquer une composition ayant un effet lubrifiant aux surfaces de la tôle d'acier.

9. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, selon la revendication 7, le procédé comprenant les étapes consistant à, dans un procédé de laminage à chaud destiné à obtenir une tôle mince d'acier de haute résistance mécanique ayant les composants chimiques selon la revendication 1, soumettre une ébauche ayant lesdits composants chimiques à un laminage grossier, puis à un laminage de finition à un rapport total de réduction de 25 % ou plus en termes d'épaisseur de tôle d'acier dans la gamme de température de la température de transformation $Ar_3 + 100$ °C ou inférieure avec la température de la passe finale du cylindre finisseur égale ou supérieure à la température de transformation Ar_3 , maintenir la tôle d'acier laminée à chaud ainsi produite pendant 1 à 20 s dans la gamme de température de la température de transformation Ar_1 à la température de transformation Ar_3 , puis, la refroidir à une vitesse de refroidissement de 20 °C/s ou plus, et la cintrer à une température de cintrage dans la gamme allant de plus de 350 °C à moins de 450 °C, et par la suite, appliquer une composition ayant un effet lubrifiant aux surfaces de la tôle d'acier.
10. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, selon la revendication 7, le procédé comprenant les étapes consistant à, dans un procédé de laminage à chaud destiné à obtenir une tôle mince d'acier de haute résistance mécanique ayant les composants chimiques selon la revendication 1, soumettre une ébauche ayant lesdits composants chimiques à un laminage grossier, puis à un laminage de finition à un rapport total de réduction de 25% ou plus en termes d'épaisseur de tôle d'acier dans la gamme de température de la température de transformation $Ar_3 + 100$ °C ou inférieure avec la température de la passe finale du cylindre finisseur égale ou supérieure à la température de transformation Ar_3 , maintenir la tôle d'acier laminée à chaud ainsi produite pendant 1 à 20 s dans la gamme de température de la température de transformation Ar_1 à la température de transformation Ar_3 , puis la refroidir à une vitesse de refroidissement de 20 °C/s ou plus, et la cintrer à une température de cintrage de 450 °C ou plus, et par la suite, appliquer une composition ayant un effet lubrifiant aux surfaces de la tôle d'acier.
11. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, selon l'une quelconque des revendications 7 à 10, **caractérisé par** : dans un procédé de laminage à chaud, l'application d'un laminage sous lubrification au laminage de finition après le laminage grossier.
12. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, selon l'une quelconque des revendications 7 à 11, **caractérisé par** : dans un procédé de laminage à chaud, l'application d'un décalaminage après l'achèvement du laminage grossier.
13. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, selon la revendication 1, le procédé comprenant les étapes consistant à, dans la production d'une tôle mince d'acier de haute résistance mécanique ayant les composants chimiques selon la revendication 1, soumettre consécutivement une ébauche ayant lesdits composants chimiques à un laminage à chaud, un décapage, un laminage à froid à un rapport de réduction inférieur à 80 % en termes d'épaisseur de tôle d'acier, puis appliquer un traitement à la chaleur comprenant les procédés consistant à maintenir la tôle d'acier laminée à froid pendant 5 à 150 s dans la gamme de température de la température de transformation AC_1 à la température de transformation $AC_3 + 100$ °C, puis à la refroidir à une vitesse de refroidissement de 20 °C/s ou plus jusqu'à la gamme de température de 350 °C ou inférieure ; et par la suite, appliquer une composition ayant un effet lubrifiant aux surfaces de la tôle d'acier.
14. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, selon la revendication 1, le procédé comprenant les étapes consistant à, dans la production d'une tôle mince d'acier de haute résistance mécanique ayant les composants chimiques selon la revendication 1, soumettre consécutivement une ébauche ayant lesdits composants chimiques à un laminage à chaud, un décapage, un laminage à froid à un rapport de réduction inférieur à 80 % en termes d'épaisseur de tôle d'acier, puis appliquer un traitement à la chaleur comprenant les procédés consistant à maintenir la tôle d'acier laminée à froid pendant 5 à 150 s dans la gamme de température de la température de transformation AC_1 à la température de transformation $AC_3 + 100$ °C, à la refroidir à une vitesse de refroidissement de 20 °C/s ou plus jusqu'à la gamme de température allant de plus de 350 °C à moins de 450 °C, à la maintenir à nouveau dans cette gamme de température pendant 5 à 600 s, puis à la refroidir à nouveau à une vitesse de refroidissement de 5 °C/s ou plus jusqu'à la gamme de température de 200 °C ou inférieure ; et, par la suite, appliquer une composition ayant un effet lubrifiant aux surfaces de la tôle d'acier.

15. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, selon la revendication 1, le procédé comprenant les étapes consistant à, dans la production d'une tôle mince d'acier de haute résistance mécanique ayant les composants chimiques selon la revendication 1, soumettre consécutivement une ébauche ayant lesdits composants chimiques à un laminage à chaud, un décapage, un laminage à froid à un rapport de réduction inférieur à 80 % en termes d'épaisseur de tôle d'acier, puis appliquer un traitement à la chaleur comprenant les procédés consistant à maintenir la tôle d'acier laminée à froid pendant 5 à 150 s dans la gamme de température de la température de transformation AC_1 à la température de transformation $AC_3 + 100\text{ °C}$, à la refroidir à une vitesse de refroidissement de 20 °C/s ou plus jusqu'à la gamme de température allant de plus de 350 °C à pas plus d'une température T_0 , puis la refroidir à nouveau à une vitesse de refroidissement en dessous de 20 °C/s jusqu'à la gamme de température de 200 °C ou inférieure ; et, par la suite, appliquer une composition ayant un effet lubrifiant aux surfaces de la tôle d'acier, dans lequel la température T_0 est spécifiée par l'équation

$$T_0 = -650,4 \times \% \text{ de C} + B,$$

où B est déterminé comme suit :

$$B = -50,6 \times M_{neq} + 894,3,$$

où M_{neq} est déterminé à partir des pourcentages en masse des éléments composants de la tôle d'acier :

$$\begin{aligned} M_{neq} = & \% \text{ de Mn} + 0,24 \times \% \text{ de Ni} + 0,13 \times \% \text{ de Si} + \\ & 0,38 \times \% \text{ de Mo} + 0,55 \times \% \text{ de Cr} + 0,16 \times \% \text{ de Cu} - \\ & 0,50 \times \% \text{ de Al} - 0,45 \times \% \text{ de Co} + 0,90 \times \% \text{ de V}. \end{aligned}$$

16. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, selon l'une quelconque des revendications 7 à 12, **caractérisé par** : la galvanisation des surfaces de la tôle d'acier en immergeant la tôle d'acier dans un bain de placage de zinc après laminage à chaud ; et, par la suite, l'application d'une composition ayant un effet lubrifiant aux surfaces de la tôle d'acier.
17. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, selon l'une quelconque des revendications 13 à 16, **caractérisé par** : la galvanisation des surfaces de la tôle d'acier en immergeant la tôle d'acier dans un bain de placage de zinc après l'achèvement des procédés de traitement à la chaleur ; et, par la suite, l'application d'une composition ayant un effet lubrifiant aux surfaces de la tôle d'acier.
18. Procédé de production d'une tôle mince d'acier de haute résistance mécanique pouvant être emboutie et présentant une excellente propriété de mémoire de forme, **caractérisé par** : la soumission d'une tôle d'acier à un traitement d'alliage après la galvanisation en immergeant la tôle d'acier dans un bain de placage de zinc selon la revendication 16 ou 17, et, par la suite, l'application d'une composition ayant un effet lubrifiant aux surfaces de la tôle d'acier.

Fig.1


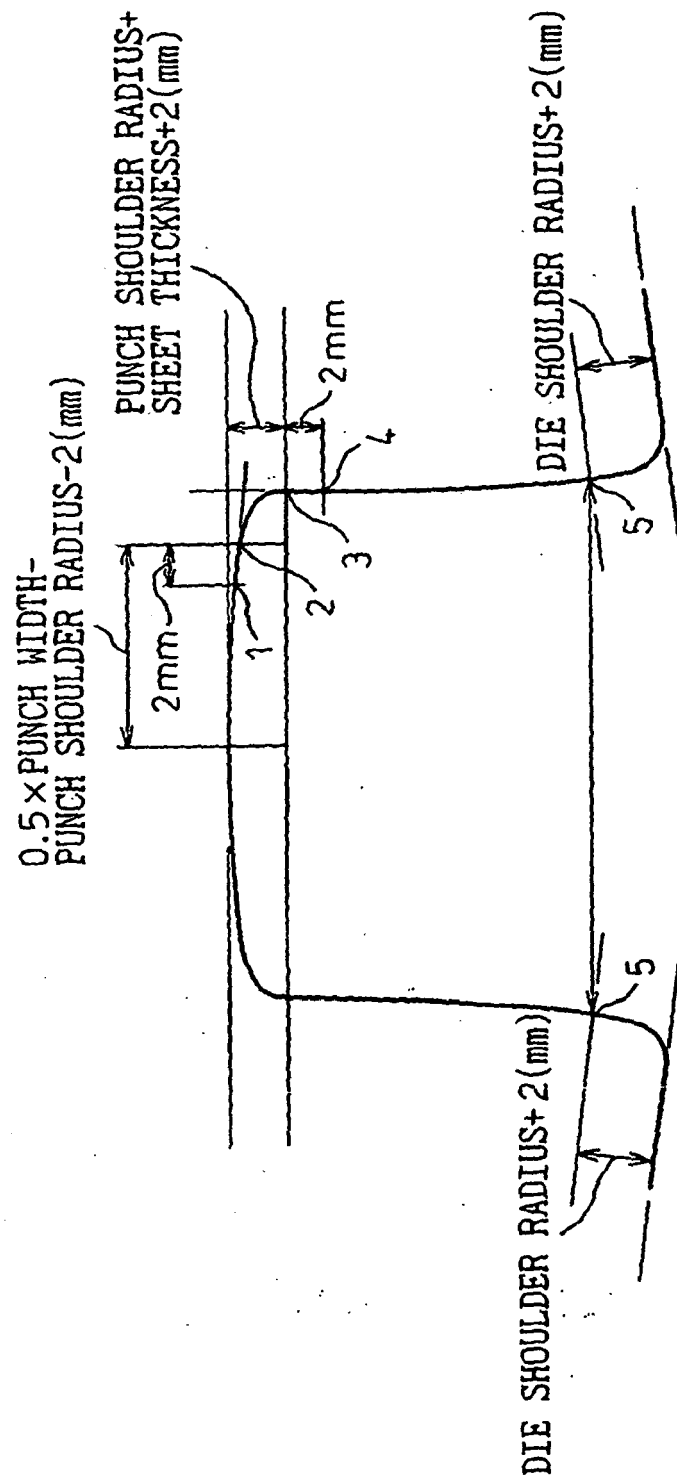


Fig.2

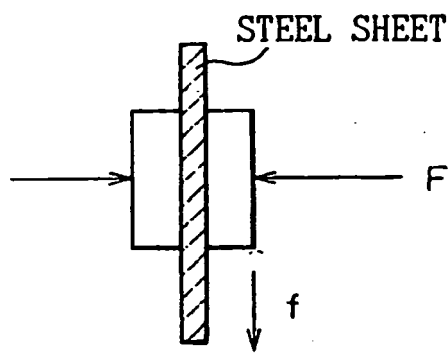

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP H1072644 B [0005]
- JP 2001032050 A [0006]
- WO 0006791 A [0007]
- JP 2000297349 A [0009]
- JP H5163590 B [0030]

Non-patent literature cited in the description

- **B. D. CULLITY ; GENTARO MATSUMURA.** Japanese translation of Elements of X-ray Diffraction. AGNE Gijutsu Center, 1986, 274-296 [0020]
- **B. D. CULLITY ; GENTARO MATSUMURA.** Japanese translation of Elements of X-ray Diffraction. 1986, 274-296 [0132]
- *Tetsu-to-Hagane*, 1991, vol. 77 (9), 1450 [0064]