



(11) **EP 2 163 582 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 71

(51) Int Cl.:
C08L 67/03 (2006.01) C08K 3/00 (2006.01)

(86) International application number:
PCT/JP2008/061918

(48) Corrigendum issued on:
23.06.2010 Bulletin 2010/25

(87) International publication number:
WO 2009/005064 (08.01.2009 Gazette 2009/02)

(43) Date of publication:
17.03.2010 Bulletin 2010/11

(21) Application number: **08790781.2**

(22) Date of filing: **01.07.2008**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR

(72) Inventor: **UEDA, Haruo**
Yokohama-shi,
Kanagawa 230-0053 (JP)

(30) Priority: **02.07.2007 JP 2007173827**


(74) Representative: **Merkle, Gebhard**
TER MEER STEINMEISTER & PARTNER GbR,
Patentanwälte
Mauerkircherstrasse 45
81679 München (DE)

(71) Applicant: **Mitsubishi Rayon Co., Ltd.**
Minato-ku
Tokyo 108-8506 (JP)

(54) **THERMOPLASTIC RESIN COMPOSITION, AND MOLDED ARTICLE THEREOF**

(57) Disclosed are a thermoplastic resin composition which has a reduced tendency to mold staining while being shaped and a high flowability, and a shaped article which, when used as a lamp component, has good surface appearance and generates little volatiles by the heat of the lamp. Specifically disclosed are a thermoplastic resin composition containing a polyester resin (A), a cresol novolac epoxy resin (B), and a vinyl cyanide - aromatic vinyl copolymer containing epoxy group (C), and a shaped article shaped therefrom, wherein the cresol novolac epoxy resin (B) and the vinyl cyanide - aromatic vinyl copolymer containing epoxy group (C) are compounded in amounts of 0.01 to 3 parts by mass and 2 to 12 parts by mass, respectively, relative to 100 parts by mass of the polyester resin (A).

FIG. 1

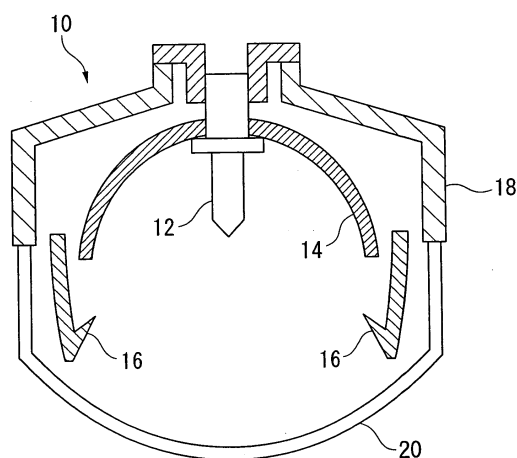

EP 2 163 582 A8