



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 71, 72

(51) Int Cl.:
B24D 18/00 (2006.01)

(48) Corrigendum issued on:
28.05.2014 Bulletin 2014/22

(43) Date of publication:
20.11.2013 Bulletin 2013/47

(21) Application number: **13168211.4**

(22) Date of filing: **17.05.2013**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(30) Priority: **17.05.2012 IT VR20120097**

(71) Applicant: **Mirani, Willem**
37010 Cavaion Veronese (VR) (IT)

(72) Inventor: **Mirani, Willem**
37010 Cavaion Veronese (VR) (IT)

(74) Representative: **Modiano, Micaela Nadia et al**
Modiano & Partners (IT)
Via Meravigli, 16
20123 Milano (IT)

(54) **Method of manufacturing an abrasive tool**

(57) A method for manufacturing an abrasive tool (1), comprising the steps that consist in:
- depositing, on a working surface (2a) formed on a metallic supporting body (2), an abrasive powder (3);
- heating the working surface (2a) and the abrasive powder (3) to a temperature above 400°C;

- pressing the abrasive powder (3) against the working surface (2a) with a pressure of more than 0.75 t/cm²;
- cooling the metallic supporting body (2) in oil in a time comprised between 2.5 minutes and 10 minutes.

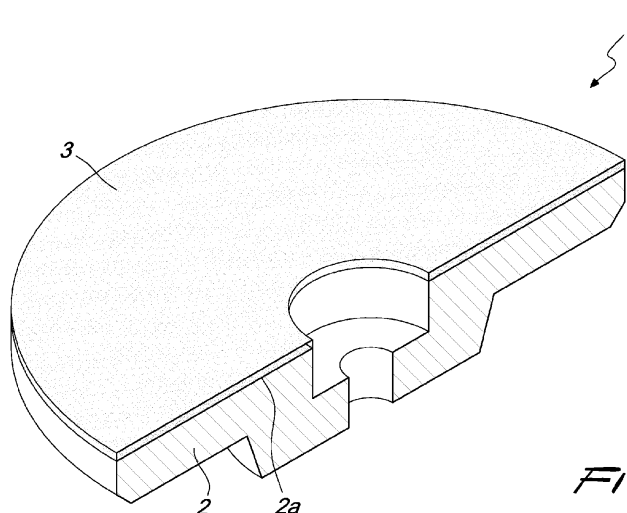


Fig. 1