

(11) EP 3 144 043 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

22.03.2017 Bulletin 2017/12

(51) Int Cl.:

A63J 25/00 (2009.01)

E04H 3/00 (2006.01)

(21) Application number: 15185387.6

(22) Date of filing: 16.09.2015

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

Designated Extension States:

BA ME

Designated Validation States:

MA

(71) Applicant: Vallesviu, S.A.

08290 Cerdanyola del Valles (Barcelona) (ES)


(72) Inventor: SALLENT PUIGCERCOS, Pere 08290 CERDANYOLA DEL VALLÈS (BARCELONA) (ES)

(74) Representative: Mohammadian, Dario Bardehle Pagenberg
Avenida Diagonal 420 1-1
08037 Barcelona (ES)

(54) CINEMA ROOM FOR A MULTI-SCREEN CINEMA

(57) Arrangement for a cinema room for a multi-screen cinema, in which each of the cinema rooms has a film projector (1), a screen (2) and tiers of seats (3) with multiple rows of seats (3a, 3b,..., 3n) arranged to different heights. Said screen (2) has a surface in form of a cylindrical sector with a constant curvature, being inclined to-

wards the stands forming an angle (a) with a vertical line comprised between $5\underline{0}$ and $10\underline{0}$ and in that the film projector (1) is integrated in an intermediate area of the tiers of seats (3), oriented towards the centre of the screen (1), forming with the screen (2) an angle (b) comprised between $80\underline{0}$ and $100\underline{0}$.

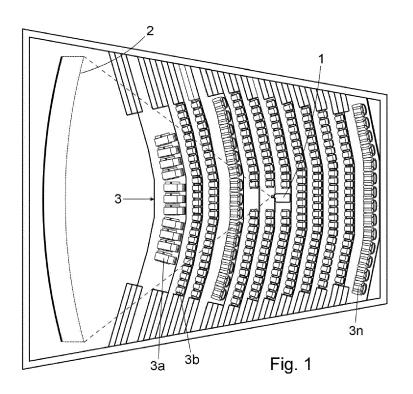

EP 3 144 043 A1

15

20

30

35

40

45

50

Description

Subject of the invention

[0001] The object of this invention is a cinema room for a multi-screen cinema, each cinema room having a film projector, a projection screen and tiers of seats or stands with multiple rows of seats arranged to different heights.

1

[0002] The arrangement of the invention has peculiarities in its construction concerning the location of the film projector and the arrangement of the screen, providing multiple advantages concerning the management of the space intended for a multi-screen cinema, improving the quality of the projection by minimizing the deformation of the image projected on the screen, providing a better utilization of the projector light and maintaining the format of the projection in which the movie has been created, as well as obtaining the same horizontal vision angle for all of the seats, independently of the position of the seats in the room and independently of the dimensions of the room, improving the visualization of the movie by the public.

State of the art

[0003] Multi-screen cinemas are currently known, having a flat screen or a variable curvature screen vertically arranged, on which frontal screen images are projected by means of film projectors located behind the projecting cinema room, higher than the tiers of seats.

[0004] This arrangement of the film projectors brings about various problems among which the following may be cited:

the utilization of a part of the space aimed at the cinema room for building behind the room the projection cabins and a corridor for its access;

a limited utilization of the light of the projection and visual deformation of the projected image on the screen due to the high location of the projector in respect to the screen and to the difference in the horizontal angle visualization in respect to the viewers, in function of their location within the cinema room;

in case of screens of large dimensions, the lack of capacity to offer sufficient luminosity forces frequently to the use of a simultaneous projection with two projectors in each of the cinema rooms, with the assistance of mirrors or prisms which generate eventual convergence problems of the images on the screen.

[0005] The difference in the visualization angle and comfort for the viewer between the first and the last rows of the cinema room is well known by the users, who avoid the occupation of the firsts rows or lower rows of seats in which they must adopt an uncomfortable position, hav-

ing at the same time a worse vision of the images; specially in small or medium sized cinema rooms.

[0006] While it is true that projection rooms exist with characteristics oriented to obtain especial effects, as the known "OMNIMAX" cinema rooms, which use a screen with a surface similar to a an spherical quadrant; the inventor does not know the existence of prior art embodiments applicable to multi-screen cinemas having an arrangement similar to the present invention and solving satisfactorily the above related problems.

Disclosure of the invention

[0007] The arrangement for a cinema room for a multiscreen cinema which is the object of the invention, having in each cinema room a projection screen, a film projector and a tiers of seats, has features aimed at solving the above problems of the presently known cinema rooms for multi-screen cinemas.

[0008] For this purpose and according to the invention, a feature of the present arrangement for cinema rooms for a multi-screen cinema consists in that each of the projection rooms has a projection screen with a surface which adopts the form of a cylindrical sector with constant curvature, being said projection screen tilted towards the tiers of seats, forming said screen an angle with the vertical comprised between $5\underline{0}$ and $10\underline{0}$, preferably $7\underline{0}$.

[0009] With the inclination of the screen and its configuration in the form of a cylindrical sector, an immersion sensation is obtained by the viewers in respect to the scenes projected on the screen as well as a better aspect of the projections.

[0010] Another feature of the invention consists in the arrangement of the film projector inside of each cinema room, integrated in an intermediate area of the tiers of seats, and oriented towards the centre of the screen, forming with said screen an angle comprised between 80º and 100º, the objective being an angle of 90º with absolute perpendicularity in respect of the screen.

[0011] This peculiarity permits the integration in the cinema room of the spaces usually located behind the room and aimed at containing the projection cabins, so that a better utilization is obtained of the space for the parterre.

[0012] Said arrangement of the film projector, apart from preventing the deformation of the images, which occurs usually in the cinema rooms in which the film projector is arranged above the tiers of seats; permits a better utilization of the projector light given the perpendicularity of the projection in respect to the screen, being unnecessary, in case of large surface screens, the simultaneous use of two film projectors and intermediate elements for re-directing towards the screen and the convergence on the screen of the images coming from the two film projectors which operate simultaneously. Furthermore, with this arrangement of the film projector, the light cast on the screen returns to the central area of the tiers of seats, improving the luminosity of the projection.

[0013] With the arrangement of a unique film projector in the central or intermediate areas of each cinema room, it is possible to minimize the difference in vertical deformation among the different rows of seats, which together with the configuration of the screen in the form of a cylindrical sector, provides an optimized vision of the images by the viewers.

3

[0014] Further, the inclination of the screen towards the tiers of seats or parterre provides the same angle for horizontal vision from all the seats, independently of the dimensions of the cinema room.

[0015] Additionally, and with the end to optimise the comfort of the users, at least the first row or seats or lower row of seats has bed-like seats, in which the viewers can arrange themselves lying or seating with a larger inclination than in the rest of seats of the rows of seats located behind, improving the comfort of the viewers.

[0016] The above features as well as other features of the invention will be more easily understood from the detailed consideration of an example embodiment according to the annexed drawing.

Description of the drawing

[0017] To complete the description of the invention and to facilitate the understanding of the features of the invention a set of drawings is annexed to this description in which, with an illustrative character but non to limit the scope of the invention, the following has been shown:

- Figure 1 shows a plant view of an example embodiment of a cinema room for a multi-screen cinema arranged according to the invention.
- Figure 2 shows an elevation view of a cross section of the cinema room of figure 1.
- Figure 3 shows a vertical projection of the screen for the cinema room corresponding to figures 1 and 2, showing the cross section of the cylindrical sector forming said screen, as well as the height and secant of the cylindrical sector shaped screen.

Preferred embodiment of the invention

[0018] Figures 1 and 2 illustrate a cinema room for a multi-screen cinema according to the invention, having a film projector (1), a projection screen (2) and the tiers of seats (3) with multiple rows of seats (3a, 3b,..., 3n). [0019] As is to be seen from the annexed figures of drawings, the movie projection screen (2) has a surface in the form of a cylindrical sector, with constant curvature, being inclined towards the low frontal area as may be observed in figure 2, forming an angle (a) with a vertical line comprised between 50 and 100, preferably 70.

[0020] Said screen (2) has format 1:1.86 which corresponds to a chip format used in digital projectors.

[0021] The movie projector (1) is integrated in an intermediate area of the tiers of seats (3), between the seats and directed towards the centre of the screen (2)

forming with said screen (2) an angle comprised between 800 and 1000, preferably 900; so that a high utilization of the light coming from the film projector (1) is obtained as well as an absolute maintenance of the projecting formats in which the film has been created.

[0022] As is to be observed in figures 1 and 2, the first row (3a) of the tiers of seats has bed-like seats, which objective is to permit the viewers using the same to arrange themselves lying or seated with a higher inclination than the rest of seats in the other rows of seats (3b,..., 3n) improving the visualization of the screen.

[0023] As may be observed in figure 3, the cylindrical sector-like surface defined by the screen (2) has a height (F) as well as a secant (S) with a length ratio comprised between 1:15 and 1:20.

[0024] After the invention having been sufficiently described in its nature, including a preferred example of an embodiment of same, it is stated to all effects that the materials, shape, size and arrangement of the described elements may be modified, whenever the modifications do not mean an alteration of the essential characteristics of the invention, as claimed in the following set of claims.

Claims

30

35

- 1. Arrangement for a cinema room for a multi-screen cinema, in which each of the cinema rooms has a film projector (1), a screen (2) and tiers of seats (3) with multiple rows of seats (3a, 3b,..., 3n) arranged to different heights; characterized in that: the screen (2) has a surface in form of a cylindrical sector with a constant curvature, being inclined towards the stands forming an angle (a) with a vertical line comprised between 50 and 100 and in that the film projector (1) is integrated in an intermediate area of the tiers of seats (3), oriented towards the centre of the screen (1), forming with the screen (2) an angle (b) comprised between 800 and 1000.
- 2. Arrangement, according to claim 1, characterized in that the surface in form of a cylindrical sector of the screen (2) has a height (F) and a secant (S) with a length ratio comprised between 1:15 and 1:20.
- 3. Arrangement, according to claim 2, characterized in that the screen has a format of 1:1.86.
- 4. Arrangement, according to claim 1, characterized in that the angle (a) of the screen (2) with respect to a vertical line is of 70.
- 5. Arrangement, according to claim 1, characterized in that the angle (b) formed by the film projector (1) in respect to the screen (2) is of 90o.
- 6. Arrangement, according to any of the previous claims, characterized in that at least the first row


3


45

50

55

of sheets (3a) has bed-like seats in which the viewers can arrange themselves lying or seated with a higher inclination than in the rows of seats located behind (3b,...,3n).

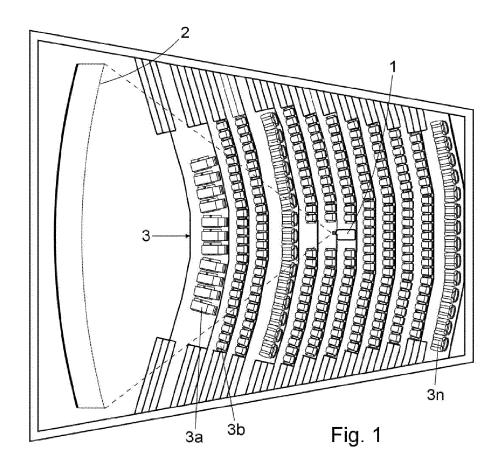

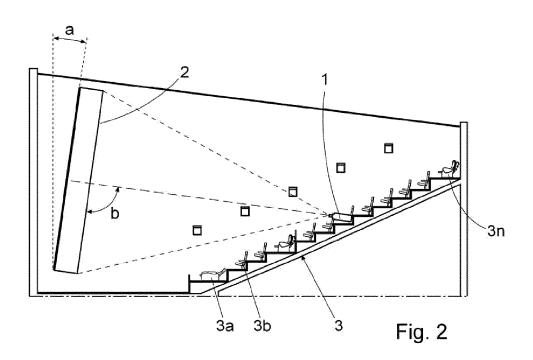

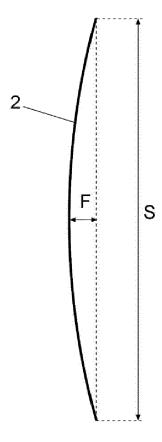


Fig. 3



EUROPEAN SEARCH REPORT

Application Number EP 15 18 5387

5

DOCUMENTS CONSIDERED TO BE RELEVANT CLASSIFICATION OF THE APPLICATION (IPC) Citation of document with indication, where appropriate, Relevant Category of relevant passages to claim 10 EP 0 987 383 A1 (DECATRON N V [BE]) 22 March 2000 (2000-03-22) Χ 1-6 INV. A63J25/00 * paragraph [0013] - paragraph [0024]; E04H3/00 figures * WO 99/56173 A2 (IMAX CORP [CA]; BAKER χ 1-5 15 KENNETH T [CA]; JACQUES ERĪC [CA]; MAXWELL IAN [) 4 November 1999 (1999-11-04) * page 4, line 19 - page 8, line 8; figures * Α 6 20 US 2011/116048 A1 (READ STEVEN CHARLES [CA] ET AL) 19 May 2011 (2011-05-19) * paragraph [0041] - paragraph [0045]; Α 1-6 figures * Α CN 203 160 750 U (SHANDONG HUAXIA GROUP CO 1-6 25 LTD) 28 August 2013 (2013-08-28) * the whole document * TECHNICAL FIELDS SEARCHED (IPC) 30 A63J E04H 35 40 45 The present search report has been drawn up for all claims 2 Place of search Date of completion of the search Examiner 50 (P04C01) Lucas, Peter Munich 11 March 2016 T: theory or principle underlying the invention
E: earlier patent document, but published on, or after the filing date
D: document cited in the application CATEGORY OF CITED DOCUMENTS 1503 03.82 X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category L: document cited for other reasons A: technological background
O: non-written disclosure
P: intermediate document 55 & : member of the same patent family, corresponding

document

EP 3 144 043 A1

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 15 18 5387

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-03-2016

10	Patent document cited in search report	Publication date	Patent family member(s)	Publication date
15	EP 0987383 A1	22-03-2000	AT 264970 T DE 69823350 D1 EP 0987383 A1	15-05-2004 27-05-2004 22-03-2000
20	WO 9956173 A2	04-11-1999	AU 3403699 A CA 2330292 A1 EP 1084448 A2 JP 2002513170 A WO 9956173 A2	16-11-1999 04-11-1999 21-03-2001 08-05-2002 04-11-1999
25	US 2011116048 A1	19-05-2011	AU 2005238723 A1 AU 2012203244 A1 CA 2565128 A1 CA 2810003 A1 CN 1950579 A	10-11-2005 21-06-2012 10-11-2005 10-11-2005 18-04-2007
30			CN 101398603 A CN 101398604 A EP 1747332 A1 EP 2639384 A2 EP 2639385 A2 JP 4921358 B2 JP 2007536051 A	01-04-2009 01-04-2009 31-01-2007 18-09-2013 18-09-2013 25-04-2012 13-12-2007
35			US 2005248726 A1 US 2006262273 A1 US 2009262305 A1 US 2011116048 A1 WO 2005106161 A1	10-11-2005 23-11-2006 22-10-2009 19-05-2011 10-11-2005
40	CN 203160750 U	28-08-2013	NONE	
45				
50				
55	FORM P0459			

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82